



DB-Aire III Systems 50/60Hz

Precision Environmental Control Unit
Cooling Capacity: 3 to 32 TR (10 to 110 kW)



DUNHAM-BUSH[®]

Products that perform...By people who care

DB-AIRE III

Precision Environmental Control Systems

For Technological Room Applications

DB-AIRE III AIR-COOLED DX & CHILLED WATER SYSTEMS

Today's technology rooms require precise, stable environments and design in order for sensitive electronics to operate optimally. Precision air conditioning is designed for close temperature and humidity control. It provides high reliability operation with the ease of service, system flexibility and redundancy necessary to keep electronic equipment up and running 24 hours a day, 365 days a year.

DB-AIRE III: Another milestone series offers a wide range of capacities in superior compact, stylish, black themed and attractive furniture grade cabinets. Available in Upflow/ Downflow configuration to provide room-based cooling and perfect control of humidification and air filtration.

GENERAL INFORMATION

DB-Aire III units are precision environmental control systems that bring a new standard of compact, flexibility and reliable performance to the computer room. Because room requirements differ, DB-Aire III offers a wide range of sizes and styles.

DB-AIRE III SYSTEMS

DBAIRE III comes in 3 systems; an air cooled DX, a chilled water coil and a dual coil system. The nominal capacity range is 3 to 32TR (10 to 110kW) of cooling.

COMPUTER COMFORT

Computer rooms require air which is clean and properly distributed with precisely controlled temperatures and humidity. Building HVAC systems simply are not designed to meet these demands. But, DB-Aire III units easily accomplish these goals with top-rated efficiency, 24 hours per day 7 days a week! DB-Aire III units have been designed to meet the demanding requirements of the most advanced computer room.

Although building HVAC systems cool your staff, they fall short of your computer's comfort need. And they are unable to provide the close humidity control required in a modern data processing centre.

DESIGN FEATURES

- Compact cabinet with anodized aluminum frame, stylish black powder coated panels of 25mm thickness with closed cell Polyethylene (PE) foam insulation.
- High efficiency VFD scroll compressor (Model 03-11) in single system and VFD + Fixed speed scroll compressor (Model 16-32) in dual system with

rotalock connection for ease of service (for air cooled DX systems).

- High-low pressure cutout to protect compressor (for air cooled DX systems).
- Specially built with non screw fixed panels where no special tools required, front access for easier service and maintenance.
- EC fan motor with high efficiency and variable speed modulation.
- Large faced area evaporator coil with hydrophilic fins.
- Deep pleated disposable filter of MERV 7 (Ashrae 52.2).
- Stainless steel finned tabular type electric heater.
- 3-way modulating valve provides accurate temperature control and dehumidification (for Chilled Water Systems).
- Integrated control system within the unit with panel mounting 4.3" graphical color touch screen for temperature/ humidity/alarm control and monitoring.
- Vision 2020i connectivity to BMS for telemonitoring.
- Electronic Expansion Valve (EEV) for efficient capacity modulation and improved performance.
- Hot Gas Reheat for air cooled DX systems (optional).
- Supply air plenum box for upflow model.
- Steam generator humidifier (optional).
- Floor water detection alarm (optional).


HIGH PERFORMANCE LOW COST

DB-Aire III has been designed with premium features, a lavish look and advanced technology. It is undeniably a neat package with a competitive price.

TABLE OF CONTENTS

| | Page No | | Page No |
|---------------------------------------|---------|------------------------------------|---------|
| General Information | 2 | Dual Coils Option | 10 |
| Nomenclature | 3 | Electrical Data | 11 |
| DB-Aire III Monitoring/ Control | 4 | Dimensional & Weight Data | 13 |
| DB-Aire III Design Features | 6 | Remote Air-Cooled Condensers | 14 |
| Performance and Technical Data | 8 | Guide Specifications | 15 |

DB-AIRE III MONITORING/ CONTROL

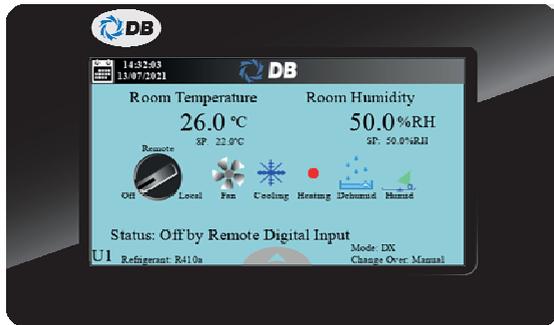

DB5+ VISION 2020i CONTROLLER

The Vision2020i is a microprocessor-based, programmable electronic controller come with DBGX terminal and optional remote management devices. These devices represent a powerful control system that can be easily interfaced with most Building Management Systems (BMS) available on the market. The Vision2020i controller has been developed by Dunham-Bush to provide solutions to precision air-conditioning in general. In a DBLAN network (Vision2020i Local Area Network) the Vision2020i can be performed as master and slave by connecting to other Vision2020i controllers. Up to 16 devices (DB5+ controllers and DBGX terminals) can be connected together, allowing highly efficient sharing of information. Each device in the DBLAN network can exchange digital or analogue data with all the others.

DBGX 4.3" COLOR TOUCH SCREEN TERMINAL

The DBGX 4.3" graphic terminal is part of the family of touch screen terminals designed to simplify user interface with the Vision 2020i family for Dunham-Bush's application. The electronic technology used and the new 65K color display means high quality images and advanced functions are available for a superior appearance. The touch screen panel makes interaction between the user and the unit much easier by simplifying navigation between the various screens.

OPERATION

DBG5 touch screen panel makes interaction between the user and the unit much easier by simplifying navigation between the various screens. Touch keypad on the DBG5 panel allows unit on/off operation, menu selection, operational information, diagnostics, historical data and trend graph. Multi-level authorization password feature prevents unauthorized access. Another feature is that all menu programmed information for basic system operation and alarm parameters is stored in a non-volatile EEPROM and FLASH-MEMORY where backup battery is not required.

PROGRAMMABLE FUNCTIONS/ MONITORING

The user-friendly touch screen color display permits step-by-step programming and display of the following functions:

- Temperature Set Point 10 to 50°C (50°F- 122°F)
- Temperature Sensitivity 0.5 to 2.7°C (1°F- 5 °F)
- Humidity Set Point (40% - 60% RH)
- Humidity Sensitivity (1% - 10% RH)
- Temperature Alarm Set points
- Humidity Alarm Set points
- Unit Start Time Delay

Normal functions are monitored and displayed on the display panel and include, in addition to the above set points, the following:

- Current Temperature (°C or °F)
- Current Humidity (%RH)
- Cooling Stages 1, 2 as applicable
- Heating Stages 1, 2, 3
- Humidification
- Dehumidification

ALARMS

Alarm conditions are also monitored on the display panel and are enunciated by an audible alarm. The alarm silence button will quiet the audible alarm but the display will continue to indicate the alarm condition until the problem is corrected.

The following alarms are standard:

- Compressor High/Low Pressure
- High and Low Temperature
- High and Low Humidity
- No Airflow
- Filters Blocked
- Humidifier Failure
- Power Failure Restart
- Compressor Short Cycle
- Temperature Sensor Error
- Humidity Sensor Error
- Local Alarm Customer Input Alarm
- Maintenance Due

With add-on optional sensors, the following alarm status can be monitored:

- Under the floor water detection
- No water flows
- Smoke alarm and etc.

In addition, incompatible control settings will be identified on the display panel.

HISTORICAL DATA

In order to facilitate maintenance and service, component run times for fan motor, compressor operation, reheat stages, humidification and dehumidification can be recalled and displayed on the DBG5 display panel. The current temperature and humidity, with the minimum and maximum readings for the last 24 hours of operation, can be recalled and displayed. The last ten alarms and hours since occurrence can also be recalled and displayed. The historical data base is stored in FLASH-MEMORY which does not require backup battery in the event of power failure.

DIAGNOSTICS

Automatic and manual diagnostic sequences simplify troubleshooting.

DB-AIRE III MONITORING/ CONTROL

PROGRAMMING KEY

The programming keys for the Vision 2020i controllers provide easy software updates during both end-of production testing and maintenance procedures.



VISION 2020i BMS COMMUNICATION INTERFACES (Optional)

As technology become smarter and more intelligent. The Vision2020i offer BMS interfacing to provide important data and control from control room. Therefore, end user can easily control their needs. The Vision2020i comes with Modbus RTU protocol (RS485 communication) as a standard on J25 BMS2 port. The Modbus protocol is the most widely-used protocol in BMS system. Its character being very simple to implement in all development packages and featuring limited use of the system's hardware & software resources. Below are the available communication interface features of the DB5+ controller:

1) Ethernet/BACnet TCPIP Card



The Ethernet/BACnet TCPIP Card offer protocol option of:

- 1.1 Modbus TCPIP. The Modbus protocol is the most widely-used protocol in BMS system. Its character being very simple to implement in all development packages and featuring limited use of the system's hardware & software resources.
- 1.2 BACnet IP. The protocol used of IP communication. The protocol based on the standards defined by US association ASHRAE (American Society of Heating, Refrigerating and Air-Conditioning Engineers). Implementation of the standards is verified at BTL laboratories (BACnet Testing Laboratories) operated by the BACnet association.
- 1.3 SNMP (Simple Network Management Protocol). The protocol for IP networks defined by the Internet Architecture Board (IAB), in order to define commands used to exchange information between different devices over the network.

2) BACnet MS/TP Card



The BACnet MS/TP Card is the BACnet protocol used of RS485 communication. The protocol based on the standards defined by US association ASHRAE (American Society of Heating, Refrigerating and Air-Conditioning Engineers). Implementation of the standards is verified at BTL laboratories (BACnet Testing Laboratories) operated by the BACnet association.

3) LONWORKS Card



The LONWORKS Card is the protocol that was Created by Echelon Corp. The LONWORKS is a leading networking solution for building automation. The communication is based on the FTT10 electrical standard.

4) Modbus RTU Card



The Modbus RTU (RS485 communication) Card is a second Modbus RTU protocol available to select.

DB-AIRE III DESIGN FEATURES


FRAME AND CABINET



The cabinet comprises an anodized aluminium frame of epoxy powder coated black color paint with nylon corners and removable steel sheet panels. All panels shall be externally installed onto the cabinet by using special stopper system without using screws. The stopper system shall also facilitate removable panels for additional ease of field installation, service and maintenance on the system. All panels and access doors shall be fabricated from sturdy heavy gauge of 1.0mm steel sheets with epoxy powder coated oven baked black color paint to provide a durable finish. All panels shall be of 25mm (1 inch) thick single skin and lined with minimum 80kg/m³ density thermal and acoustical closed cell Polyethylene (PE) foam insulation resistance of Class O (BS 476 Part 6, 7). The system shall be designed for front access only with hinged and lock type full height doors.


COOLING COIL

Computer selected coil design, using interwoven coil surface increases unit efficiency at low loads. Air is drawn through the coil at low velocity providing effective surface exposure with minimum turbulence. This provides greater efficiency in the cooling and dehumidification process.

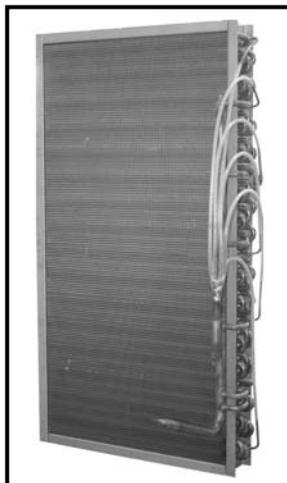

FAN SECTION

The indoor unit are equipped with an electronically commutated (EC) plug fans to make sure the system are driven with 30% less energy compare to a conventional AC type. Capability to give higher part load efficiency due to the ability to precisely regulate the airflow according to the load demand makes an EC fan the right choice. The EC fan's impellers were welded with 7 backward curved blades made of aluminium to minimize the bearing load and at the same time maximizing the durability especially when work at high circumferential velocity.

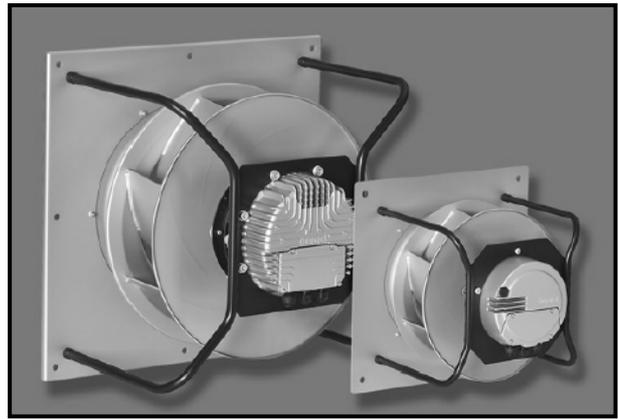

FILTERS

The system shall be provided with 2 inches (50mm) deep (for model 03-05) or 4 inches (100mm) deep (for model 09-32) extended surface pleated disposable type filters rated for MERV 7 efficiency to ASHRAE 52.2 standard. Filters shall be withdrawable from the front of the unit.



ELECTRICAL REHEAT

The three stages stainless steel finned tubular reheat coils provide ample capacity to maintain room dry bulb conditions during a system call for dehumidification. Three equal stages give a more accurate controlled response to the requirements of the computer room. The heating elements are protected by thermal safety switches. The three stages of reheat create a noticeable lowering of energy use.

DB-AIRE III DESIGN FEATURES


COMPRESSOR




DB-Aire III offers the Variable Frequency Drive (VFD) compressor to satisfy the needs of high efficiency and low energy product. The capability to modulate the compressor speed will allow it to match the on-demand capacity while maintaining the optimum power usage. Significant energy saving can be expected during part load condition. The low start-up frequency is also contributing to the lower initial current peak that usually occur with conventional fix speed compressor.

The DB-Aire III dual compressors model, comes with a combination of one VFD and one fix speed compressor. At low load condition, one compressor will be stopped to allow a minimum energy usage.

VFD Advantage 1 – Precisely match the capacity demand thus optimize energy usage.

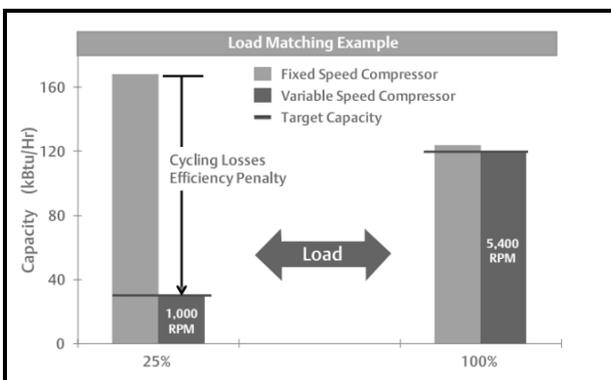

VFD Advantage 2 – Better temperature control compared to normal fix speed control.

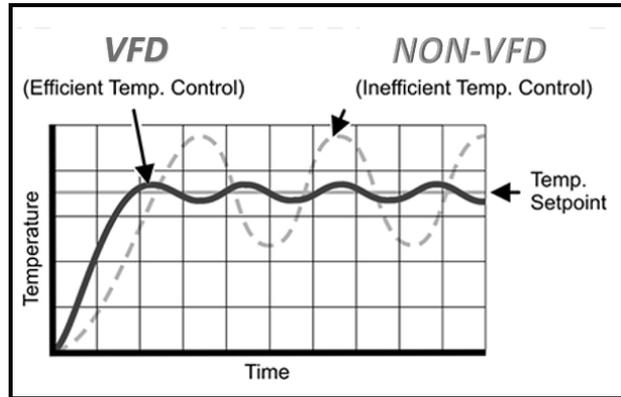

HOT GAS REHEAT (OPTIONAL)

The unit shall incorporate a hot gas reheat coil located downstream of the evaporator coil with modulating valve which is completely integrated to the unit's microprocessor control. For units with two refrigerant circuits, each circuit shall operate independently with its own modulating valve.

HUMIDIFICATION (OPTIONAL)

The disposable cartridge electric steam generator humidifier provides humidification down stream of the cooling coil. The humidifier is designed to allow all units at any voltage to produce full rated steam output at an optimum low water level.

ELECTRONIC EXPANSION VALVE (EEV)

The refrigerant circuit(s) shall be provided with an Electronic Expansion Valve (EEV) for evaporator to allow an efficient modulation control of refrigeration and consistent energy saving performances.

DB-AIRE III HUMID INTERFACE

The DB-Aire III Humid interface allows the control of humidifiers directly from the DB-Aire III microprocessor controller.

AIR COOLED SYSTEMS

A wide range of sizes of remote mounted air-cooled condensers are available from DB-Aire III in vertical discharge. Condensers are manufactured by DB-Aire III and include circuits sized to match the heat rejection of the corresponding compressors. The industrial duty design includes galvanised corrosion resistant housings, high efficiency aluminium finned (optional copper fins available), copper tube coils; coated fan guards, energy efficient thermally protected motors; and integral factory wired and tested control panel.

PERFORMANCE AND TECHNICAL DATA

AIR COOLED DX SYSTEM @ 35°C (95°F) AMBIENT TEMPERATURE - WITH OR WITHOUT HOT GAS REHEAT

| MODEL | | | DBAD/U 03 DBRD/U 03 | DBAD/U 05 DBRD/U 05 | DBAD/U 09 DBRD/U 09 | DBAD/U 11 DBRD/U 11 | DBAD/U 14 DBRD/U 14 | DBAD/U 16 DBRD/U 16 | DBAD/U 19 DBRD/U 19 | DBAD/U 22 DBRD/U 22 | DBAD/U 26 DBRD/U 26 | DBAD/U 29 DBRD/U 29 | DBAD/U 32 DBRD/U 32 | |
|--|-----------------------------|-----------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|-----------------|
| Return Air 75F/62.5F/50% RH (24C/17C/50% RH) | Total Cooling Capacity | MBH (kW) | 35.8 (10.5) | 55.5 (16.3) | 107.4 (31.5) | 128.3 (37.6) | 167.1 (49.0) | 202.1 (59.2) | 229.9 (67.4) | 261.8 (76.7) | 306.5 (89.8) | 345.8 (101.3) | 377.5 (110.6) | |
| | Sensible Cooling Capacity | MBH (kW) | 33.0 (9.7) | 51.6 (15.1) | 102.3 (30.0) | 121.1 (35.5) | 148.5 (43.5) | 178.3 (52.3) | 219.4 (64.3) | 233.7 (68.5) | 268.6 (78.7) | 314.2 (92.1) | 354.4 (103.9) | |
| | Sensible Heat Ratio (SHR) | | 0.92 | 0.93 | 0.95 | 0.94 | 0.89 | 0.88 | 0.95 | 0.89 | 0.88 | 0.91 | 0.94 | |
| Return Air 72F/60F/50% RH (22C/16C/50% RH) | Total Cooling Capacity | MBH (kW) | 35.9 (10.5) | 55.3 (16.2) | 108.1 (31.7) | 119.6 (35.1) | 164.4 (48.2) | 188.2 (55.2) | 227.9 (66.8) | 243.9 (71.5) | 286.2 (83.9) | 335.7 (98.4) | 353.5 (103.6) | |
| | Sensible Cooling Capacity | MBH (kW) | 33.2 (9.7) | 51.2 (15.0) | 101.5 (29.8) | 109.9 (32.2) | 139.5 (40.9) | 171.6 (50.3) | 218.0 (63.9) | 224.9 (65.9) | 262.6 (77.0) | 294.1 (86.2) | 346.6 (101.6) | |
| | Sensible Heat Ratio (SHR) | | 0.92 | 0.93 | 0.94 | 0.92 | 0.85 | 0.91 | 0.96 | 0.92 | 0.92 | 0.88 | 0.98 | |
| Return Air 75F/52F Dew Point (24C/11C Dew Point) Class 1 AHRI 1360 rating condition | Total Cooling Capacity | MBH (kW) | 34.6 (10.1) | 54.0 (15.8) | 104.4 (30.6) | 117.5 (34.4) | 167.4 (49.1) | 180.7 (53.0) | 221.5 (64.9) | 234.3 (68.7) | 275.2 (80.7) | 341.4 (100.1) | 346.6 (101.6) | |
| | Sensible Cooling Capacity | MBH (kW) | 33.4 (9.8) | 52.3 (15.3) | 102.4 (30.0) | 117.5 (34.4) | 150.6 (44.1) | 175.1 (51.3) | 221.5 (64.9) | 226.6 (66.4) | 264.3 (77.5) | 318.4 (93.3) | 346.6 (101.6) | |
| COMPRESSOR VFD Compressor (Single) VFD + Fix Compressor (Dual) | Number of Compressor(s) | | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | |
| | Total Power Input (50Hz) | kW | 2.4 | 4.1 | 8.6 | 9.0 | 13.9 | 14.6 | 18.7 | 18.2 | 23.4 | 30.0 | 28.1 | |
| | Total Power Input (60Hz) | kW | 2.6 | 4.3 | 8.8 | 9.2 | 14.1 | 15.4 | 19.2 | 19.1 | 24.4 | 31.0 | 28.0 | |
| | Hot Gas; Liquid Lines, 50Hz | In | 1/2 ; 3/8 | 1/2 ; 3/8 | 7/8 ; 5/8 | 7/8 ; 5/8 | 7/8 ; 5/8 | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) |
| | Hot Gas; Liquid Lines, 60Hz | In | 1/2 ; 3/8 | 1/2 ; 3/8 | 7/8 ; 5/8 | 7/8 ; 5/8 | 7/8 ; 5/8 | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) | 7/8(2) ; 5/8(2) |
| EC FAN (INDOOR) | Fan Qty | | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | |
| | Air Volume | CFM (m ³ /h) | 1,500 (2,548) | 2,500 (4,247) | 5,000 (8,495) | 6,000 (10,194) | 8,000 (13,592) | 10,000 (16,989) | 11,000 (18,688) | 11,000 (18,688) | 13,000 (22,086) | 15,000 (25,485) | 18,000 (30,582) | |
| | ESP | in H ₂ O (Pa) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | |
| | Fan Size OD | mm | 355 | 355 | 500 | 355 | 355 | 500 | 500 | 500 | 500 | 500 | 500 | |
| COIL (DX) | Face Area | ft ² (m ²) | 5.6 (0.5) | 5.6 (0.5) | 12.2 (1.1) | 12.2 (1.1) | 23.9 (2.2) | 23.9 (2.2) | 23.9 (2.2) | 23.9 (2.2) | 23.9 (2.2) | 33.1 (3.1) | 33.1 (3.1) | |
| | Face Velocity | FPM (m/s) | 270 (1.4) | 450 (2.3) | 409 (2.1) | 491 (2.5) | 335 (1.7) | 419 (2.1) | 461 (2.3) | 461 (2.3) | 544 (2.8) | 453 (2.2) | 544 (2.8) | |
| | Condensate Drain O.D | In | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | |
| FILTERS (ASHRAE 52.2 MERV 7) | 20" x 20" x 2" | Qty | 2 | 2 | N/A | |
| | 20" x 20" x 4" | Qty | N/A | N/A | 4 | 4 | 6 | 6 | 6 | 6 | 6 | 4 | 4 | |
| | 20" x 25" x 4" | Qty | N/A | N/A | N/A | N/A | 2 | 2 | 2 | 2 | 2 | 6 | 6 | |
| REHEAT (Electric) | 3-Stages (rated at 415V) | MBH (kW) | 20.5 (6.0) | 20.5 (6.0) | 41.0 (12.0) | 41.0 (12.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) | |
| STEAM HUMIDIFIER (OPTIONAL) | Capacity (max.) | lbs/hr (kg/hr) | 17 (8.0) | 17 (8.0) | 17 (8.0) | 17 (8.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) | |
| | Power Input (max.) | kW | 6.0 | 6.0 | 6.0 | 6.0 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | |
| SOUND PRESSURE LEVEL (at 2m distance, free field, downflow) | | | dBA | 61 | 57 | 60 | 62 | 65 | 68 | 73 | 74 | 70 | 72 | |

PERFORMANCE AND TECHNICAL DATA

CHILLED WATER SYSTEM @ WATER SUPPLY/ RETURN 7°C/ 12°C (44.6°F/ 53.6°F)

| Model | | | DBCD/U 03 | DBCD/U 05 | DBCD/U 09 | DBCD/U 11 | DBCD/U 14 | DBCD/U 16 | DBCD/U 19 | DBCD/U 22 | DBCD/U 26 | DBCD/U 29 | DBCD/U 32 |
|---|--------------------------------|-----------------------------------|---------------|---------------|---------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Return Air 75F/62.5F/50% RH (24C/17C/50% RH) | Total Cooling Capacity | MBH (kW) | 43.0 (12.6) | 67.9 (19.9) | 132.3 (38.8) | 162.0 (47.5) | 205.3 (60.2) | 240.5 (70.5) | 280.9 (82.3) | 319.0 (93.5) | 360.4 (105.6) | 444.1 (130.2) | 507.4 (148.7) |
| | Sensible Cooling Capacity | MBH (kW) | 37.1 (10.9) | 61.0 (17.9) | 118.6 (34.8) | 145.3 (42.6) | 184.9 (54.2) | 221.9 (65.0) | 255.5 (74.9) | 277.1 (81.2) | 318.1 (93.2) | 385.7 (113.1) | 448.3 (131.4) |
| | Sensible Heat Ratio (SHR) | | 0.86 | 0.90 | 0.90 | 0.90 | 0.90 | 0.92 | 0.91 | 0.87 | 0.88 | 0.87 | 0.88 |
| | Water Flow Rate | GPM (m ³ /hr) | 9.9 (2.2) | 15.6 (3.5) | 29.7 (6.7) | 37.2 (8.4) | 47.1 (10.7) | 55.1 (12.5) | 64.4 (14.6) | 73.2 (16.6) | 82.7 (18.8) | 98.8 (22.4) | 112.9 (25.6) |
| | Water Pressure Drop | PSI (kPa) | 5.5 (38.0) | 2.7 (18.8) | 10.1 (69.6) | 4.1 (28.4) | 2.3 (15.5) | 3.0 (20.6) | 2.7 (18.5) | 6.5 (45.1) | 8.1 (55.6) | 6.9 (47.5) | 8.7 (60.1) |
| Return Air 80°F/66.6°F/ 50% RH (26.6°C/19.2°C/ 50% RH) | Total Cooling Capacity | MBH (kW) | 64.1 (18.8) | 98.8 (29.0) | 188.4 (55.2) | 235.2 (68.9) | 300.5 (88.1) | 351.2 (102.9) | 409.2 (119.9) | 461.3 (135.2) | 520.7 (152.6) | 602.1 (176.5) | 687.4 (201.5) |
| | Sensible Cooling Capacity | MBH (kW) | 42.9 (12.6) | 69.0 (20.2) | 130.8 (38.3) | 164.7 (48.3) | 210.5 (61.7) | 251.3 (73.7) | 289.2 (84.8) | 314.6 (92.2) | 360.0 (105.5) | 423.5 (124.1) | 490.8 (143.8) |
| | Sensible Heat Ratio (SHR) | | 0.67 | 0.70 | 0.69 | 0.70 | 0.70 | 0.72 | 0.71 | 0.68 | 0.69 | 0.70 | 0.71 |
| | Water Flow Rate | GPM (m ³ /hr) | 14.3 (3.2) | 22.0 (5.0) | 41.9 (9.5) | 52.3 (11.9) | 66.8 (15.2) | 78.1 (17.7) | 91 (20.7) | 102.6 (23.3) | 115.8 (26.3) | 134.0 (30.4) | 152.9 (34.7) |
| | Water Pressure Drop | PSI (kPa) | 10.4 (71.4) | 4.9 (34.1) | 18.3 (125.8) | 7.5 (51.7) | 4.2 (28.7) | 5.5 (37.7) | 4.9 (34.1) | 11.7 (81.0) | 14.5 (99.8) | 11.8 (81.3) | 14.9 (102.8) |
| EC FAN (INDOOR) | Fan Qty | | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 4 |
| | Air Volume | CFM (m ³ /h) | 1,500 (2,548) | 2,500 (4,247) | 5,000 (8,495) | 6,000 (10,194) | 8,000 (13,592) | 10,000 (16,989) | 11,000 (18,688) | 11,000 (18,688) | 13,000 (22,086) | 15,000 (25,485) | 18,000 (30,582) |
| | External Static Pressure (ESP) | in H ₂ O (Pa) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) | 1.5 (374) |
| | Fan Size OD | mm | 355 | 355 | 500 | 355 | 355 | 500 | 500 | 500 | 500 | 500 | 500 |
| Coil (Chilled Water) | Face Area | ft ² (m ²) | 5.6 (0.5) | 5.6 (0.5) | 12.2 (1.1) | 12.2 (1.1) | 23.9 (2.2) | 23.9 (2.2) | 23.9 (2.2) | 23.9 (2.2) | 23.9 (2.2) | 33.1 (3.1) | 33.1 (3.1) |
| | Face Velocity | FPM (m/s) | 270 (1.4) | 450 (2.3) | 409 (2.1) | 491 (2.5) | 335 (1.7) | 419 (2.1) | 461 (2.3) | 461 (2.3) | 544 (2.8) | 453 (2.2) | 544 (2.8) |
| | Condensate Drain O.D | Inch | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 |
| Chilled Water Control | 3-Way Modulating Valve, Size | DN, mm | 25 | 25 | 25 | 40 | 40 | 40 | 40 | 40 | 50 | 50 | 50 |
| | | Kv, m ³ /h | 10 | 10 | 10 | 16 | 16 | 16 | 16 | 16 | 25 | 25 | 25 |
| Filters (ASHRAE 52.2 MERV 7) | 20" x 20" x 2" | Qty | 2 | 2 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | 20" x 20" x 4" | Qty | N/A | N/A | 4 | 4 | 6 | 6 | 6 | 6 | 6 | 4 | 4 |
| | 20" x 25" x 4" | Qty | N/A | N/A | N/A | N/A | 2 | 2 | 2 | 2 | 2 | 6 | 6 |
| Reheat (Electric) | 3-Stages (rated at 415V) | MBH (kW) | 20.5 (6.0) | 20.5 (6.0) | 41.0 (12.0) | 41.0 (12.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) | 61.4 (18.0) |
| Steam Humidifier (Optional) | Capacity (max.) | lbs/hr (kg/hr) | 17 (8.0) | 17 (8.0) | 17 (8.0) | 17 (8.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) | 33 (15.0) |
| | Power Input (max.) | kW | 6.0 | 6.0 | 6.0 | 6.0 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 | 11.3 |
| Sound Pressure Level (at 2m distance, free field, downflow) | | dBA | 41 | 54 | 60 | 62 | 65 | 68 | 77 | 77 | 69 | 70 | 72 |

DUAL COILS OPTION

AIR COOLED DX & CHILLED WATER SYSTEMS

This system is a combination of both the Direct Expansion (DX) and Chilled Water (CW) system with 2 cooling coil. Cooling capacity and other parameters for DX and CW System are as stated on respective tables; except for the following.

| Model | DBDD/U 03 | DBDD/U 05 | DBDD/U 09 | DBDD/U 11 | DBDD/U 14 | DBDD/U 16 | |
|--|-----------|-----------|-----------|-----------|-----------|-----------|----|
| Sound Pressure Level (at 2m distance, free field, downflow) | dBA | 61 | 58 | 63 | 65 | 70 | 70 |

| Model | DBDD/U 19 | DBDD/U 22 | DBDD/U 26 | DBDD/U 29 | DBDD/U 32 | |
|--|-----------|-----------|-----------|-----------|-----------|----|
| Sound Pressure Level (at 2m distance, free field, downflow) | dBA | 81 | 81 | 75 | 75 | 76 |

CONDENSER SELECTION

Selections are to be based on standard airflow rate and return air temperature of 24°C / 17°C (75°F / 62.5°F) or lesser at sea level.

| Model | DX-System | DBAD/U 03 | DBAD/U 05 | DBAD/U 09 | DBAD/U 11 | DBAD/U 14 | DBAD/U 16 |
|--------------------------------|-------------------------------|-----------|-----------|-----------|-----------|------------|------------|
| | Dual Coils System | DBDD/U 03 | DBDD/U 05 | DBDD/U 09 | DBDD/U 11 | DBDD/U 14 | DBDD/U 16 |
| | DX-System with Hot Gas Reheat | DBRD/U 03 | DBRD/U 05 | DBRD/U 09 | DBRD/U 11 | DBRD/U 14 | DBRD/U 16 |
| Total Heat Rejection (Nominal) | MBH (kW) | 46 (14) | 73 (21) | 151 (44) | 171 (50) | 220 (64) | 262 (77) |
| 35°C (95°F) Ambient | - | DBRC04 | DBRC06 | DBRC10 | DBRC13 | DBRC17 | DBRC20 |
| 37.8°C (100°F) Ambient | - | DBRC04 | DBRC06 | DBRC13 | DBRC17 | DBRC20 | DBRC26 |
| 40.6°C (105°F) Ambient | - | DBRC06 | DBRC08 | DBRC17 | DBRC20 | DBRC26 | DBRC26 |
| 43°C (110°F) Ambient | See Note 1 | DBRC06 | DBRC11 | DBRC20 | DBRC26 | DBRC34 | DBRC40 |
| 46°C (115°F) Ambient | See Note 1 | DBRC11 | DBRC17 | DBRC34 | DBRC40 | DBRC44 | DBRC30 x 2 |
| 49°C (120°F) Ambient | See Note 2 | DBRC11 | DBRC20 | DBRC34 | DBRC40 | DBRC44 | DBRC30 x 2 |
| 52°C (125°F) Ambient | See Note 3 | DBRC13 | DBRC26 | DBRC40 | DBRC44 | DBRC26 x 2 | DBRC30 x 2 |

| Model | DX-System | DBAD/U 19 | DBAD/U 22 | DBAD/U 26 | DBAD/U 29 | DBAD/U 32 |
|--------------------------------|-------------------------------|------------|------------|------------|------------|------------|
| | Dual Coils System | DBDD/U 19 | DBDD/U 22 | DBDD/U 26 | DBDD/U 29 | DBDD/U 32 |
| | DX-System with Hot Gas Reheat | DBRD/U 19 | DBRD/U 22 | DBRD/U 26 | DBRD/U 29 | DBRD/U 32 |
| Total Heat Rejection (Nominal) | MBH (kW) | 293 (86) | 332 (97) | 388 (114) | 445 (130) | 465 (136) |
| 35°C (95°F) Ambient | - | DBRC20 | DBRC26 | DBRC30 | DBRC34 | DBRC34 |
| 37.8°C (100°F) Ambient | - | DBRC26 | DBRC30 | DBRC30 | DBRC40 | DBRC40 |
| 40.6°C (105°F) Ambient | - | DBRC34 | DBRC34 | DBRC34 | DBRC44 | DBRC44 |
| 43°C (110°F) Ambient | See Note 1 | DBRC44 | DBRC44 | DBRC44 | DBRC40 x 2 | DBRC40 x 2 |
| 46°C (115°F) Ambient | See Note 1 | DBRC30 x 2 | DBRC40 x 2 | DBRC40 x 2 | DBRC40 x 2 | DBRC40 x 2 |
| 49°C (120°F) Ambient | See Note 2 | DBRC34 x 2 | DBRC40 x 2 | DBRC44 x 2 | DBRC44 x 2 | DBRC44 x 2 |
| 52°C (125°F) Ambient | See Note 3 | DBRC34 x 2 | DBRC44 x 2 | DBRC44 x 2 | DBRC44 x 2 | DBRC44 x 2 |

Notes: 1.) Multiply Total Compressor Power Input by 1.05
 2.) Multiply Cooling Capacity by 0.9. Multiply Total Compressor Power Input by 1.1
 3.) Multiply Cooling Capacity by 0.9. Multiply Total Compressor Power Input by 1.2

ELECTRICAL DATA

AIR COOLED DX & CHILLED WATER SYSTEMS

1.) STANDARD - COOLING & ELECTRIC HEATERS

At 35°C (95°F) ambient; Return Air at 24°C/17°C/50 %RH (75°F/62.5°F/50 %RH)

| Model | DBAD/U 03 | | | DBAD/U 05 | | | DBAD/U 09 | | | DBAD/U 11 | | | DBAD/U 14 | | | DBAD/U 16 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|------|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS | RLA | MCA | MFS | RLA | MCA | MFS | RLA | MCA | MFS | RLA | MCA | MFS | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 13.8 | 15 | 20 | 17.1 | 19 | 25 | 32.5 | 35.1 | 50 | 39.1 | 43 | 60 | 59.2 | 62 | 80 | 60.8 | 65 | 80 |
| 380V/ 3Ph/ 60Hz | 13.8 | 15 | 20 | 17.1 | 19 | 25 | 32.5 | 35 | 50 | 39.1 | 43 | 60 | 59.1 | 62 | 80 | 61.2 | 66 | 80 |
| 460V/ 3Ph/ 60Hz | 12.3 | 13 | 20 | 15.6 | 17 | 25 | 29.3 | 32 | 45 | 35.9 | 40 | 60 | 53.7 | 56 | 70 | 54.9 | 59 | 80 |

| Model | DBAD/U 19 | | | DBAD/U 22 | | | DBAD/U 26 | | | DBAD/U 29 | | | DBAD/U 32 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 66.4 | 70 | 90 | 71.1 | 76 | 100 | 75.1 | 81 | 125 | 89.5 | 97 | 150 | 103.8 | 111 | 150 |
| 380V/ 3Ph/ 60Hz | 64.9 | 69 | 80 | 73.5 | 79 | 100 | 78.5 | 85 | 110 | 94.0 | 102 | 150 | 103 | 111 | 150 |
| 460V/ 3Ph/ 60Hz | 58.8 | 63 | 80 | 67 | 72 | 100 | 72 | 78 | 110 | 81.1 | 88 | 125 | 93.6 | 101 | 150 |

Return Air at 24°C/17°C/50 %RH (75°F/62.5°F/50 %RH)

| Model | DBCD/U 03 | | | DBCD/U 05 | | | DBCD/U 09 | | | DBCD/U 11 | | | DBCD/U 14 | | | DBCD/U 16 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 10.1 | 10 | 15 | 11.2 | 12 | 15 | 22.1 | 23 | 30 | 23.1 | 24 | 30 | 34.8 | 37 | 45 | 33.7 | 35 | 45 |
| 380V/ 3Ph/ 60Hz | 10.1 | 10 | 15 | 11.2 | 12 | 15 | 22.1 | 23 | 30 | 23.1 | 24 | 30 | 34.8 | 37 | 45 | 33.7 | 35 | 40 |
| 460V/ 3Ph/ 60Hz | 8.5 | 9 | 15 | 9.7 | 10 | 15 | 22.1 | 23 | 30 | 20 | 21 | 30 | 34.8 | 37 | 45 | 29 | 31 | 40 |

| Model | DBCD/U 19 | | | DBCD/U 22 | | | DBCD/U 26 | | | DBCD/U 29 | | | DBCD/U 32 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 36.0 | 38 | 50 | 36.3 | 39 | 50 | 37.3 | 40 | 50 | 41.8 | 53 | 70 | 49.8 | 53 | 70 |
| 380V/ 3Ph/ 60Hz | 36.0 | 38 | 45 | 36.3 | 39 | 45 | 37.3 | 40 | 45 | 41.8 | 45 | 60 | 49.8 | 53 | 60 |
| 460V/ 3Ph/ 60Hz | 31.3 | 34 | 45 | 31.5 | 34 | 45 | 32.6 | 35 | 45 | 41.8 | 45 | 60 | 43.4 | 47 | 60 |

2.) STANDARD WITH OPTIONAL HUMIDIFIER

At 35°C (95°F) ambient; Return Air at 24°C/ 17°C/50 %RH (75°F/62.5°F/50 %RH)

| Model | DBAD/U 03 | | | DBAD/U 05 | | | DBAD/U 09 | | | DBAD/U 11 | | | DBAD/U 14 | | | DBAD/U 16 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 23.0 | 24 | 30 | 26.3 | 28 | 35 | 41.6 | 44 | 60 | 48.2 | 52 | 70 | 76.4 | 79 | 90 | 78.0 | 82 | 100 |
| 380V/ 3Ph/ 60Hz | 23.0 | 24 | 25 | 26.3 | 28 | 35 | 41.6 | 44 | 60 | 48.2 | 52 | 70 | 76.3 | 79 | 90 | 78.4 | 83 | 100 |
| 460V/ 3Ph/ 60Hz | 19.8 | 21 | 25 | 23.1 | 25 | 35 | 36.9 | 40 | 50 | 43.4 | 47 | 70 | 67.9 | 71 | 90 | 69.1 | 73 | 100 |

| Model | DBAD/U 19 | | | DBAD/U 22 | | | DBAD/U 26 | | | DBAD/U 29 | | | DBAD/U 32 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 83.6 | 88 | 110 | 88.2 | 93 | 110 | 92.2 | 98 | 150 | 106.7 | 114 | 150 | 121.0 | 128 | 175 |
| 380V/ 3Ph/ 60Hz | 82.1 | 86 | 100 | 90.7 | 96 | 110 | 95.6 | 102 | 125 | 111.1 | 120 | 150 | 120.2 | 128 | 150 |
| 460V/ 3Ph/ 60Hz | 73.0 | 77 | 100 | 81.2 | 87 | 110 | 86.2 | 92 | 125 | 95.3 | 102 | 150 | 107.8 | 116 | 150 |

Note : RLA - Rated Load Amps

MCA - Minimum Circuit Amps

MFS - Maximum Fuse Size

Return Air at 24°C/17°C/50 %RH (75°F/62.5°F/50 %RH)

| Model | DBCD/U 03 | | | DBCD/U 05 | | | DBCD/U 09 | | | DBCD/U 11 | | | DBCD/U 14 | | | DBCD/U 16 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 19.2 | 19 | 20 | 20.4 | 21 | 25 | 31.2 | 32 | 40 | 32.2 | 33 | 40 | 52.0 | 54 | 70 | 50.9 | 52 | 60 |
| 380V/ 3Ph/ 60Hz | 19.2 | 19 | 20 | 20.4 | 21 | 20 | 31.2 | 32 | 40 | 32.2 | 34 | 35 | 52.0 | 54 | 70 | 50.9 | 53 | 60 |
| 460V/ 3Ph/ 60Hz | 16.0 | 16 | 20 | 17.2 | 18 | 20 | 29.6 | 31 | 35 | 27.5 | 29 | 35 | 49.0 | 51 | 60 | 43.1 | 45 | 60 |

| Model | DBCD/U 19 | | | DBCD/U 22 | | | DBCD/U 26 | | | DBCD/U 29 | | | DBCD/U 32 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 53.2 | 55 | 70 | 53.5 | 56 | 70 | 54.5 | 57 | 70 | 59.0 | 63 | 80 | 67.0 | 70 | 90 |
| 380V/ 3Ph/ 60Hz | 53.2 | 55 | 60 | 53.5 | 56 | 60 | 54.5 | 57 | 60 | 59.0 | 63 | 80 | 67.0 | 70 | 80 |
| 460V/ 3Ph/ 60Hz | 45.5 | 48 | 60 | 45.7 | 48 | 60 | 46.8 | 49 | 60 | 56.0 | 60 | 80 | 57.6 | 61 | 80 |

ELECTRICAL DATA

AIR COOLED DUAL COILS (DX + CW) & DX WITH HOT GAS REHEAT SYSTEMS

1.) STANDARD - COOLING & ELECTRIC HEATERS

At 35°C (95°F) ambient; Return Air at 24°C/17°C/50 %RH (75°F/62.5°F/ 50 %RH)

| Model | DBDD/U 03 | | | | DBDD/U 05 | | | | DBDD/U 09 | | | | DBDD/U 11 | | | | DBDD/U 14 | | | | DBDD/U 16 | | | |
|---------------------|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|
| | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 14.0 | 10.2 | 15 | 20 | 17.3 | 11.3 | 19 | 25 | 32.5 | 22.1 | 35 | 50 | 40.1 | 24.0 | 44 | 60 | 59.2 | 34.8 | 62 | 80 | 61.7 | 34.4 | 66 | 90 |
| 380V/ 3Ph/ 60Hz | 14.0 | 10.2 | 15 | 20 | 17.3 | 11.3 | 19 | 25 | 32.5 | 22.1 | 35 | 50 | 40.1 | 24.0 | 44 | 60 | 59.1 | 34.8 | 62 | 80 | 62.2 | 34.4 | 84 | 80 |
| 460V/ 3Ph/ 60Hz | 12.4 | 8.6 | 13 | 20 | 15.7 | 9.7 | 17 | 25 | 29.3 | 18.9 | 32 | 45 | 36.9 | 20.8 | 41 | 60 | 53.7 | 30.1 | 56 | 70 | 55.9 | 29.7 | 60 | 80 |

| Model | DBDD/U 19 | | | | DBDD/U 22 | | | | DBDD/U 26 | | | | DBDD/U 29 | | | | DBDD/U 32 | | | | | | | |
|---------------------|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|----------|-----------|-----|-----|
| | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 68.9 | 37.6 | 73 | 90 | 73.8 | 37.8 | 79 | 100 | 77.8 | 40.0 | 83 | 110 | 89.5 | 53.3 | 115 | 150 | 107.5 | 53.3 | 115 | 150 | 107.5 | 53.3 | 115 | 150 |
| 380V/ 3Ph/ 60Hz | 67.4 | 37.6 | 71 | 80 | 76.2 | 37.8 | 82 | 100 | 81.2 | 40.0 | 87 | 110 | 94.0 | 41.8 | 102 | 150 | 106.7 | 53.3 | 114 | 150 | 106.7 | 53.3 | 114 | 150 |
| 460V/ 3Ph/ 60Hz | 61.2 | 32.8 | 65 | 80 | 69.8 | 33.1 | 75 | 100 | 74.7 | 35.2 | 81 | 110 | 81.1 | 37.1 | 88 | 125 | 97.2 | 47.0 | 105 | 150 | 97.2 | 47.0 | 105 | 150 |

2.) STANDARD WITH OPTIONAL HUMIDIFIER

At 35°C (95°F) ambient; Return Air at 24°C/17°C/50 %RH (75°F/62.5°F/ 50 %RH)

| Model | DBDD/U 03 | | | | DBDD/U 05 | | | | DBDD/U 09 | | | | DBDD/U 11 | | | | DBDD/U 14 | | | | DBDD/U 16 | | | |
|---------------------|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|
| | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 23.1 | 19.3 | 24 | 30 | 26.4 | 20.4 | 28 | 35 | 41.6 | 31.2 | 44 | 60 | 49.2 | 33.1 | 53 | 70 | 76.4 | 52.0 | 79 | 90 | 78.9 | 51.6 | 83 | 100 |
| 380V/ 3Ph/ 60Hz | 23.1 | 19.3 | 24 | 30 | 26.4 | 20.4 | 28 | 35 | 41.6 | 31.2 | 44 | 60 | 49.2 | 33.1 | 53 | 70 | 76.3 | 52.0 | 79 | 90 | 79.4 | 51.6 | 84 | 100 |
| 460V/ 3Ph/ 60Hz | 19.9 | 16.1 | 21 | 30 | 23.2 | 17.3 | 25 | 35 | 36.9 | 26.4 | 40 | 50 | 44.4 | 28.4 | 49 | 70 | 67.9 | 44.2 | 71 | 90 | 70.0 | 43.9 | 74 | 100 |

| Model | DBDD/U 19 | | | | DBDD/U 22 | | | | DBDD/U 26 | | | | DBDD/U 29 | | | | DBDD/U 32 | | | | | | | |
|---------------------|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|-----------|-----------|-----|-----|----------|-----------|-----|-----|
| | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS | RLA (DX) | RLA (CHW) | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 86.1 | 54.8 | 90 | 110 | 91.0 | 55.0 | 96 | 125 | 95.0 | 57.1 | 101 | 125 | 106.7 | 59.0 | 114 | 150 | 124.6 | 70.5 | 132 | 175 | 124.6 | 70.5 | 132 | 175 |
| 380V/ 3Ph/ 60Hz | 84.6 | 54.8 | 88 | 100 | 93.4 | 55.0 | 99 | 110 | 98.4 | 57.1 | 104 | 125 | 111.1 | 59.0 | 119 | 150 | 123.8 | 70.5 | 132 | 150 | 123.8 | 70.5 | 132 | 150 |
| 460V/ 3Ph/ 60Hz | 75.4 | 47.0 | 79 | 100 | 83.9 | 47.3 | 89 | 110 | 88.9 | 49.4 | 95 | 125 | 95.3 | 51.2 | 102 | 150 | 111.4 | 61.1 | 119 | 150 | 111.4 | 61.1 | 119 | 150 |

Note : RLA - Rated Load Amps

MCA - Minimum Circuit Amps

MFS - Maximum Fuse Size

3.) COOLING & HOT GAS REHEAT

At 35°C (95°F) ambient; Return Air at 24°C/17°C/50 %RH (75°F/62.5°F/ 50 %RH)

| Model | DBRD/U 03 | | | DBRD/U 05 | | | DBRD/U 09 | | | DBRD/U 11 | | | DBRD/U 14 | | | DBRD/U 16 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 5.0 | 6 | 15 | 7.7 | 9 | 20 | 14.3 | 17 | 30 | 20.1 | 24 | 45 | 31.9 | 35 | 50 | 33.6 | 38 | 60 |
| 380V/ 3Ph/ 60Hz | 5.0 | 6 | 15 | 7.7 | 9 | 20 | 14.3 | 17 | 30 | 20.1 | 24 | 45 | 31.8 | 35 | 50 | 34.1 | 38 | 60 |
| 460V/ 3Ph/ 60Hz | 5.0 | 6 | 15 | 7.7 | 9 | 20 | 14.3 | 17 | 30 | 20.1 | 24 | 45 | 31.1 | 34 | 45 | 32.5 | 37 | 60 |

| Model | DBRD/U 19 | | | DBRD/U 22 | | | DBRD/U 26 | | | DBRD/U 29 | | | DBRD/U 32 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 37.9 | 42 | 60 | 42.6 | 48 | 70 | 48.9 | 55 | 80 | 62.2 | 73 | 110 | 65.9 | 73 | 110 |
| 380V/ 3Ph/ 60Hz | 36.4 | 40 | 60 | 45.0 | 50 | 70 | 52.3 | 58 | 80 | 66.6 | 74 | 110 | 65.1 | 73 | 110 |
| 460V/ 3Ph/ 60Hz | 35.0 | 39 | 60 | 43.3 | 49 | 70 | 50.6 | 57 | 80 | 58.5 | 65 | 100 | 62.0 | 70 | 110 |

4.) COOLING & HOT GAS REHEAT WITH OPTIONAL HUMIDIFIER

At 35°C (95°F) ambient; Return Air at 24°C/17°C/50 %RH (75°F/62.5°F/ 50 %RH)

| Model | DBRD/U 03 | | | DBRD/U 05 | | | DBRD/U 09 | | | DBRD/U 11 | | | DBRD/U 14 | | | DBRD/U 16 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 14.1 | 15 | 20 | 16.8 | 18 | 25 | 23.4 | 26 | 40 | 29.2 | 33 | 50 | 49.1 | 52 | 70 | 50.8 | 55 | 80 |
| 380V/ 3Ph/ 60Hz | 14.1 | 15 | 20 | 16.8 | 18 | 25 | 23.4 | 26 | 40 | 29.2 | 33 | 50 | 49.0 | 52 | 70 | 51.2 | 56 | 80 |
| 460V/ 3Ph/ 60Hz | 12.6 | 14 | 15 | 15.2 | 17 | 25 | 21.8 | 24 | 35 | 27.6 | 32 | 50 | 45.3 | 48 | 60 | 46.7 | 51 | 80 |

| Model | DBRD/U 19 | | | DBRD/U 22 | | | DBRD/U 26 | | | DBRD/U 29 | | | DBRD/U 32 | | |
|---------------------|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-----------|-----|-----|
| | RLA | MCA | MFS |
| 380-415V/ 3Ph/ 50Hz | 55.1 | 59 | 80 | 59.7 | 65 | 90 | 66.0 | 72 | 100 | 79.3 | 87 | 125 | 83.0 | 90 | 125 |
| 380V/ 3Ph/ 60Hz | 53.6 | 57 | 80 | 62.1 | 67 | 90 | 69.4 | 75 | 100 | 83.8 | 92 | 125 | 82.2 | 90 | 125 |
| 460V/ 3Ph/ 60Hz | 49.2 | 53 | 80 | 57.5 | 63 | 90 | 64.7 | 71 | 100 | 72.7 | 80 | 110 | 76.2 | 84 | 125 |


Note : RLA - Rated Load Amps

MCA - Minimum Circuit Amps

MFS - Maximum Fuse Size


DIMENSIONAL AND WEIGHT DATA

UPFLOW

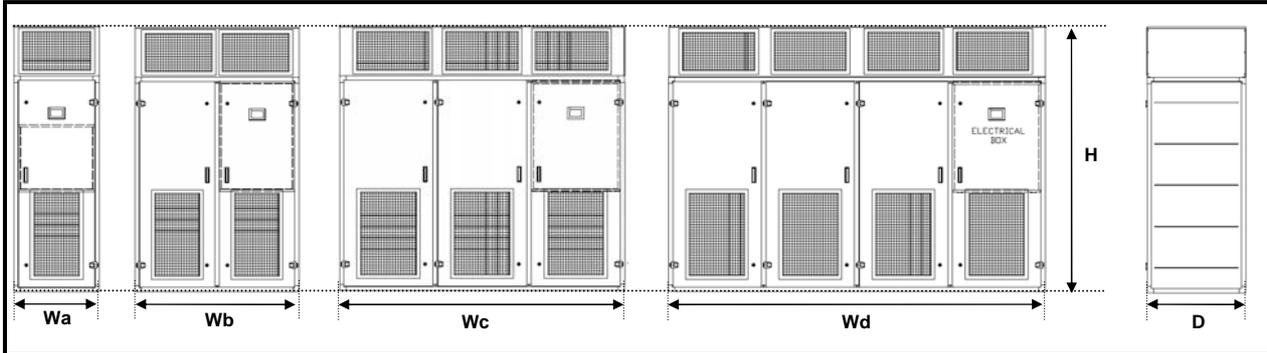

| Model | | | | | | | | Height | Depth | Width | | | |
|-----------|------------------|-----------|------------------|-------------------|------------------|------------------------|------------------|-------------|-------------|--------------|--------------|--------------|--------------|
| DX System | Weight kg (lbs.) | CW System | Weight kg (lbs.) | Dual Coils System | Weight kg (lbs.) | DX with Hot Gas Reheat | Weight kg (lbs.) | H mm (inch) | D mm (inch) | Wa mm (inch) | Wb mm (inch) | Wc mm (inch) | Wd mm (inch) |
| DBAU03 | 278 (612) | DBC03 | 246 (541) | DBDU03 | 303 (667) | DBRU03 | 292 (643) | 2401 (95) | 874 (34.4) | 749 (29.5) | | | |
| DBAU05 | 282 (621) | DBC05 | 263 (579) | DBDU05 | 314 (692) | DBRU05 | 296 (652) | 2401 (95) | 874 (34.4) | 749 (29.5) | | | |
| DBAU09 | 472 (1039) | DBC09 | 461 (1016) | DBDU09 | 535 (1180) | DBRU09 | 494 (1089) | 2401 (95) | 874 (34.4) | | 1464 (57.6) | | |
| DBAU11 | 495 (1091) | DBC11 | 468 (1032) | DBDU11 | 558 (1230) | DBRU11 | 517 (1139) | 2401 (95) | 874 (34.4) | | 1464 (57.6) | | |
| DBAU14 | 791 (1742) | DBC14 | 701 (1544) | DBDU14 | 886 (1953) | DBRU14 | 832 (1832) | 2401 (95) | 874 (34.4) | | | 2554 (100.6) | |
| DBAU16 | 837 (1845) | DBC16 | 735 (1619) | DBDU16 | 932 (2056) | DBRU16 | 878 (1935) | 2401 (95) | 874 (34.4) | | | 2554 (100.6) | |
| DBAU19 | 836 (1843) | DBC19 | 756 (1666) | DBDU19 | 957 (2109) | DBRU19 | 877 (1934) | 2401 (95) | 874 (34.4) | | | 2554 (100.6) | |
| DBAU22 | 865 (1908) | DBC22 | 769 (1694) | DBDU22 | 986 (2174) | DBRU22 | 906 (1998) | 2401 (95) | 874 (34.4) | | | 2554 (100.6) | |
| DBAU26 | 920 (2027) | DBC26 | 820 (1807) | DBDU26 | 1042(2297) | DBRU26 | 961 (2118) | 2401 (95) | 874 (34.4) | | | 2554 (100.6) | |
| DBAU29 | 1180(2599) | DBC29 | 1056(2328) | DBDU29 | 1298(2859) | DBRU29 | 1221(2689) | 2401 (95) | 874 (34.4) | | | | 3394 (133.6) |
| DBAU32 | 1222(2693) | DBC32 | 1097(2418) | DBDU32 | 1340(2953) | DBRU32 | 1263(2783) | 2401 (95) | 874 (34.4) | | | | 3394 (133.6) |

DOWNFLOW

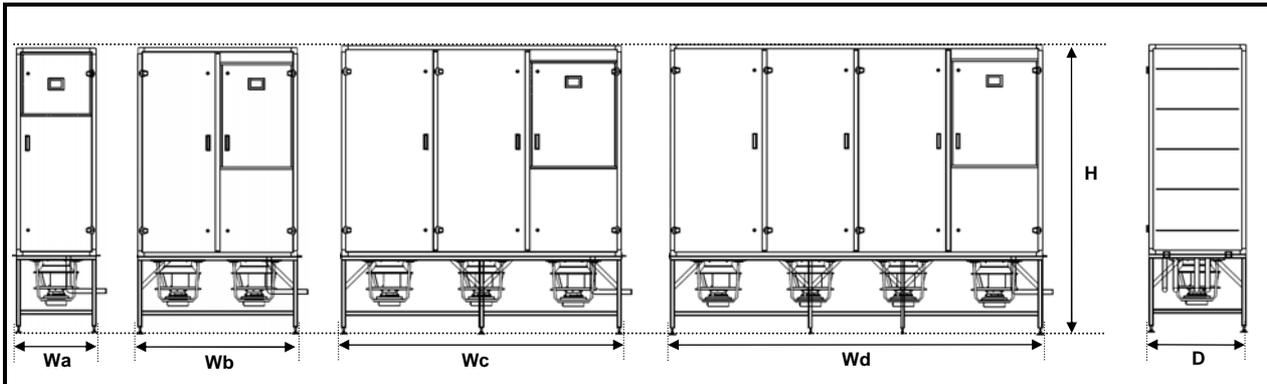


| Model | | | | | | | | Height | Depth | Width | | | |
|-----------|------------------|-----------|------------------|-------------------|------------------|------------------------|------------------|-------------|-------------|--------------|--------------|--------------|--------------|
| DX System | Weight kg (lbs.) | CW System | Weight kg (lbs.) | Dual Coils System | Weight kg (lbs.) | DX with Hot Gas Reheat | Weight kg (lbs.) | H mm (inch) | D mm (inch) | Wa mm (inch) | Wb mm (inch) | Wc mm (inch) | Wd mm (inch) |
| DBAD03 | 258 (570) | DBC03 | 226 (499) | DBDD03 | 283 (625) | DBRD03 | 272 (601) | 2666 (105) | 874 (34.4) | 749 (29.5) | | | |
| DBAD05 | 262 (579) | DBC05 | 243 (536) | DBDD05 | 294 (649) | DBRD05 | 276 (610) | 2666 (105) | 874 (34.4) | 749 (29.5) | | | |
| DBAD09 | 441 (972) | DBC09 | 430 (948) | DBDD09 | 504 (1111) | DBRD09 | 463 (1021) | 2666 (105) | 874 (34.4) | | 1464 (57.6) | | |
| DBAD11 | 464 (1023) | DBC11 | 437 (964) | DBDD11 | 527 (1162) | DBRD11 | 486 (1072) | 2666 (105) | 874 (34.4) | | 1464 (57.6) | | |
| DBAD14 | 743 (1636) | DBC14 | 653 (1438) | DBDD14 | 838 (1847) | DBRD14 | 784 (1726) | 2666 (105) | 874 (34.4) | | | 2554 (100.6) | |
| DBAD16 | 789 (1739) | DBC16 | 687 (1513) | DBDD16 | 884 (1950) | DBRD16 | 830 (1829) | 2666 (105) | 874 (34.4) | | | 2554 (100.6) | |
| DBAD19 | 788 (1738) | DBC19 | 708 (1560) | DBDD19 | 909 (2003) | DBRD19 | 829 (1828) | 2666 (105) | 874 (34.4) | | | 2554 (100.6) | |
| DBAD22 | 817 (1802) | DBC22 | 721 (1588) | DBDD22 | 938 (2068) | DBRD22 | 858 (1892) | 2666 (105) | 874 (34.4) | | | 2554 (100.6) | |
| DBAD26 | 872 (1922) | DBC26 | 772 (1701) | DBDD26 | 994 (2191) | DBRD26 | 913 (2012) | 2666 (105) | 874 (34.4) | | | 2554 (100.6) | |
| DBAD29 | 1113(2453) | DBC29 | 990(2182) | DBDD29 | 1231(2713) | DBRD29 | 1154(2543) | 2666 (105) | 874 (34.4) | | | | 3394 (133.6) |
| DBAD32 | 1155(2547) | DBC32 | 1031(2272) | DBDD32 | 1273(2807) | DBRD32 | 1196(2637) | 2666 (105) | 874 (34.4) | | | | 3394 (133.6) |

**Model 16-22 is with 2 fans, model 26 is with 3 fans (Diagram only shows 3 fans)

REMOTE AIR-COOLED CONDENSERS

TECHNICAL DATA

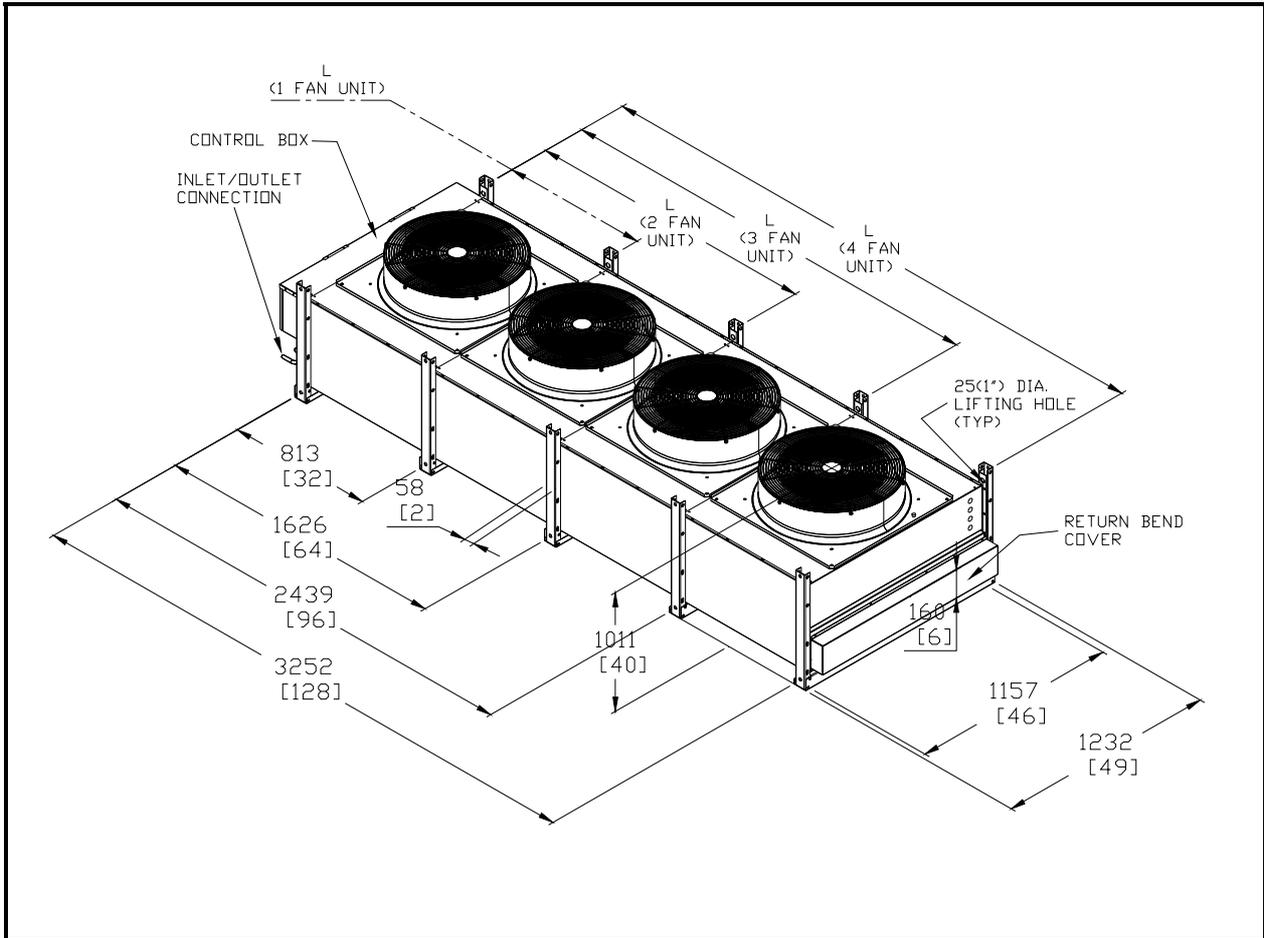

| Model | Physical Data | | | | Electrical Data | | | | | | | |
|---------|---------------------------|------|--------------------|-------------------------------|-----------------|------|------|---------------------|--------------|--------------|--------------|-------------------|
| | Length 'L' mm (inches) | Fans | | Approx. Weight kg (lbs) | Motor Qty | RPM | | Motor FLA (3-Phase) | | | | |
| | | Qty | Total L/S (CFM) | | | 50Hz | 60Hz | 380V 50Hz | 400V 50Hz | 415V 50Hz | 460V 60Hz | 208V-230V 60Hz |
| DBRC 04 | 870 (34¼) | 1 | 3210 (6800) | 100 (220) | 1 | 925 | 1110 | 2 | 1.9 | 1.8 | 2.7 | 5.5 |
| DBRC 06 | 870 (34¼) | 1 | 3210 (6800) | 111 (244) | 1 | 925 | 1110 | 2 | 1.9 | 1.8 | 2.7 | 5.5 |
| DBRC 08 | 870 (34¼) | 1 | 3210 (6800) | 122 (268) | 1 | 925 | 1110 | 2 | 1.9 | 1.8 | 2.7 | 5.5 |
| DBRC 10 | 870 (34¼) | 1 | 3210 (6800) | 134 (295) | 1 | 925 | 1110 | 2 | 1.9 | 1.8 | 2.7 | 5.5 |
| DBRC 11 | 870 (34¼) | 1 | 3210 (6800) | 180 (400) | 1 | 925 | 1110 | 2 | 1.9 | 1.8 | 2.7 | 5.5 |
| DBRC 13 | 1683 (66¼) | 2 | 6420 (13600) | 190 (420) | 2 | 925 | 1110 | 4 | 3.8 | 3.6 | 5.4 | 11 |
| DBRC 17 | 1683 (66¼) | 2 | 6420 (13600) | 204 (450) | 2 | 925 | 1110 | 4 | 3.8 | 3.6 | 5.4 | 11 |
| DBRC 20 | 1683 (66¼) | 2 | 6420 (13600) | 265 (583) | 2 | 925 | 1110 | 4 | 3.8 | 3.6 | 5.4 | 11 |
| DBRC 26 | 2500 (98¼) | 3 | 9630 (20400) | 288 (634) | 3 | 925 | 1110 | 6 | 5.7 | 5.4 | 8.1 | 16.5 |
| DBRC 30 | 2500 (98¼) | 3 | 9630 (20400) | 320 (700) | 3 | 925 | 1110 | 6 | 5.7 | 5.4 | 8.1 | 16.5 |
| DBRC 34 | 2500 (98¼) | 3 | 9630 (20400) | 355 (780) | 3 | 925 | 1110 | 6 | 5.7 | 5.4 | 8.1 | 16.5 |
| DBRC 40 | 3308 (130¼) | 4 | 12838 (27200) | 380 (835) | 4 | 925 | 1110 | 8 | 7.6 | 7.2 | 10.8 | 22 |
| DBRC 44 | 3308 (130¼) | 4 | 12838 (27200) | 410 (900) | 4 | 925 | 1110 | 8 | 7.6 | 7.2 | 10.8 | 22 |

Note: All dimensions are in mm (inches).

GUIDE SPECIFICATIONS

This specification describes requirements for precision air conditioning system. The system shall be designed to maintain precised temperature and humidity conditions for applications such as computer server rooms, telecommunication facilities, clean rooms, laboratories, etc. The precision environmental control system shall be factory assembled by Dunham-Bush Industries, Malaysia.

DESIGN REQUIREMENTS

(A) Direct Expansion (DX) System

- The system shall have a total cooling capacity of _____MBH / _____kW and a sensible cooling capacity of _____MBH / _____kW based on an entering air temperature of _____°F / _____°C DB and _____°F / _____°C WB.
- The system shall be designed based on _____°F / _____°C DB ambient temperature. For low ambient application, the system shall also be designed to operate at _____°F / _____°C DB ambient temperature.
- The unit shall be supplied with _____/_____/_____(Volt/Phase/Hz) electrical service.
- The unit shall be of Upflow / Downflow configured model.

(B) Chilled Water (CW) System

- The system shall have a total cooling capacity of _____MBH / _____kW and a sensible cooling capacity of _____MBH / _____kW based on an entering air temperature of _____°F / _____°C DB and _____°F / _____°C WB.
- The system shall be supplied with chilled water with an entering water temperature of _____°F / _____°C and leaving water temperature _____°F / _____°C.
- The unit shall be supplied with _____/_____/_____(Volt/Phase/Hz) electrical service.
- The unit shall be of Upflow / Downflow configured model.

(C) Dual Coils (DX + CW) System

- The system shall have a total cooling capacity of _____MBH / _____kW and a sensible cooling capacity of _____MBH / _____kW based on an entering air temperature of _____°F / _____°C DB and _____°F / _____°C WB.
- The DX system shall be designed based on _____°F / _____°C DB ambient temperature. For low ambient application, the system shall also be designed to operate at _____°F / _____°C DB ambient temperature.
- The CW system shall be supplied with chilled water with an entering water temperature of _____°F / _____°C and leaving water temperature _____°F / _____°C.
- The unit shall be supplied with _____/_____/_____(Volt/Phase/Hz) electrical service.
- The unit shall be of Upflow / Downflow configured model.

(D) Direct Expansion (DX) System with hot gas reheat

- The system shall have a total cooling capacity of _____MBH / _____kW and a sensible cooling capacity of _____MBH / _____kW based on an

entering air temperature of _____°F / _____°C DB and _____°F / _____°C WB.

- The system shall be designed based on _____°F / _____°C DB ambient temperature. For low ambient application, the system shall also be designed to operate at _____°F / _____°C DB ambient temperature.
- The unit shall be supplied with _____/_____/_____(Volt/Phase/Hz) electrical service.
- The unit shall be of Upflow / Downflow configured model.

1 STANDARD FEATURES (ALL SYSTEMS, INDOOR UNIT)

1.1 Cabinet

The cabinet comprises an anodized aluminium frame of epoxy powder coated black color paint with nylon corners and removable steel sheet panels. All panels shall be externally installed onto the cabinet by using special stopper system without using screws. The stopper system shall also facilitate removable panels for additional ease of field installation, service and maintenance on the system. All panels and access doors shall be fabricated from sturdy heavy gauge of 1.0mm steel sheets with epoxy powder coated oven baked black color paint to provide a durable finish. All panels shall be of 25mm (1 inch) thick single skin and lined with minimum 2lbs/ft³ density thermal and acoustical closed cell Polyethylene (PE) foam insulation with fire resistant of Class O (BS 476 Part 6, 7). The system shall be designed for front access only with hinged and lock type full height doors.

1.2 Filters

The system shall be provided with 2 inches (50mm) deep (for model 03-05) or 4 inches (100mm) deep (for model 09-32) extended surface pleated disposable type filters rated for MERV 7 efficiency to ASHRAE 52.2 standard. Filters shall be withdrawable from the front of the unit.

1.3 Fan Motor

The system are equipped with EC Fan Motor set for both upflow & downflow model.

1.4 Evaporator Air Discharge

1.4.1 Up-Flow (Front Free Return)

The system shall be configured for up-flow pattern with front free evaporator return air and top evaporator air discharge. The system shall be supplied with grilles on the cabinet doors for front return air configuration. Up-flow systems are equipped with Discharge Plenum.

1.4.2 Down-Flow (Top Free or Ducted Return)

The system shall be configured for down-flow pattern with top free or ducted evaporator return air and bottom evaporator air discharge through the raised floor.

1.5 Electric Reheat or Hot Gas Reheat

1.5.1 For Direct Expansion (DX) System, Chilled Water (CW) System and Dual Coils (DX+CW) System only.

The electric reheat shall be factory installed low watt density finned-tubular nickel plated element heater with overheat safety controls. The electric reheat shall be of three equal stages

GUIDE SPECIFICATIONS

giving a more accurate controlled response to the room requirement.

1.5.2 For Direct Expansion (DX) System with Hot Gas Reheat only

The unit shall incorporate a hot gas reheat coil located downstream of the evaporator coil with modulating valve which is completely integrated to the unit's microprocessor control. For units with two refrigerant circuits, each circuit shall operate independently with its own modulating valve.

1.6 Electrical Circuits

The system shall be provided with a factory installed electrical enclosure as per local code requirements. Control voltage of the system shall be 24Vac. The fan motor(s), compressor(s), electric heaters, humidifier (if applicable) shall have their own circuit breaker and contactor. The electrical circuit shall have provision for user to cut off control power during fire / emergency shutdown

1.7 Control System – Vision 2020i Controller

1.7.1 Controller and display

The unit shall be provided with Vision 2020i control system with the following features,

- The control algorithm and parameters shall be stored in flash memory and E²PROM of the controller and shall retain even in the event of power failures, without requiring a backup battery
- 4.3" graphical touch terminal with 65k color display
- Built in memory for data logging
- Temperature and humidity controlled
- Configurable by user
- Alarm status/display
- Analog input/output display
- Digital input/output status
- Remote start/stop input
- Digital input for customer input alarm
- General alarm output (dry contact)
- Self-diagnostics
- Security password access with multiple access level for advanced settings
- Unit status display with following information:
 - Current room temperature and temperature setpoint
 - Current room relative humidity and relative humidity setpoint
 - System ON/OFF
 - Operating mode (cooling/ heating/ humidifying/ dehumidifying)

1.7.2 Alarm Monitoring

When the system is in alarm condition, the system shall activate an audible buzzer and visual alarm message on the terminal display. A digital output (dry contact) shall be closed to indicate the alarm condition. The following alarm conditions shall be monitored by the controller:

- High room temperature
- Low room temperature
- High supply air temperature
- High room humidity
- Low room humidity
- No air flow/loss of air flow

- Filter dirty
- Sensor failure
- Evaporator fan overload alarm
- Customer interlock alarm
- Unit/ Compressor running hours threshold exceeded
- LAN network disconnected alarm
- High/Low refrigerant pressure alarm (DX models)
- Chilled water flow switch alarm (chilled water models)
- Humidity Alarms
- Under floor water detector alarm (optional)
- Smoke detector alarm (optional)

1.7.3 Master-Slave Sequencing Control

When more than one unit is present in the system, master-slave or duty-standby control of this group of units shall be done by just connecting controller of each unit in serial and require no additional controller.

1.7.4 BMS communications and remote monitoring

ModBus RTU RS485 communication port shall be a standard feature of the controller. On top of that, the following options shall be available for BMS communications and remote monitoring:

- ModBus TCP/IP
- BACnet TCP/IP / PTP / MSTP
- LONworks
- GSM Modem
- SNMP

2 DIRECT EXPANSION (DX) SPLIT SYSTEMS WITH REMOTE OUTDOOR AIR COOLED CONDENSER (DBRC MODELS)

2.1 Compressor

The VFD compressor body shall be fully hermetic sealed, scroll type vapor compression & utilize three-phase brushless permanent magnet (BPM) motors with positive displacement oil pump. It shall be supplied with a compatible driver and this driver shall convert the input supply voltage frequency into a variable frequency, depending on the needs. The compressor shall be mounted on the base via vibration isolators and shall be charged with polyolester oil and designed for use with R410A refrigerant. Crankcase heater shall be provided externally to protect compressor from being damaged due to refrigerant migration during off cycle.

Same goes for the fix speed & digital scroll compressor except that they do not need to have a driver. They shall use direct power supply.

Additionally for digital scroll compressor, it shall come with accessories such as modulating valve, discharge temperature sensor & controller to modulate the supply load.

These compressors shall be able to operate in ambient as high as 125°F (with bigger Condensing unit) and as low as 66°F. Lower than that, it shall be supported with the using of Low Ambient Kit.

2.2 Refrigeration Circuits

The refrigeration system shall be of the direct expansion type with one (Model 03-11) or two (Model 16-32) hermetic scroll compressors complete with

GUIDE SPECIFICATIONS

rotalock connections. All refrigeration circuit shall be pre-piped with copper tubing and include expansion valve with external equalizer, filter dryer, sight glass, refrigerant service valves, pressure fittings of manual reset high pressure control/auto reset low pressure safety cutouts and charging/access ports in each circuit.

2.3 Evaporator Coil

The evaporator coil shall be of draw through air design for uniform air distribution. The evaporator coil shall be a quality construction of seamless copper tube, mechanically bonded to hydrophilic aluminium fins with galvanized coil plates. The coil shall be factory leak and pressure tested to 650psig (45 bar) for R410A system and the refrigeration system shall be sealed prior to shipment. A galvanized and painted drain pan shall be provided to cover the entire coil area. The drain pan shall be designed to incorporate sloped gutter for complete condensate removal.

2.4 Remote Outdoor Air Cooled Condenser (DBRC Models)

The remote condenser shall be constructed from sturdy heavy gauge steel sheets with epoxy powder coated oven baked, factory standard beige color to provide a durable finish.

The remote condenser shall include direct driven propeller fans, condenser coil, fan guard, thermally protected rated IP55 motors, integral factory wired and tested control panel. The condenser coil shall be quality construction of seamless copper tube, mechanically bonded to aluminium fins with galvanized coil plates. The coil shall be factory leak and pressure tested to 650psig (45 bar) for R410A system and the refrigeration system shall be sealed prior to shipment.

The evaporator and condenser sections shall ship with a dry-nitrogen holding charge ready for field refrigerant charging.

3 CHILLED WATER (CW) SYSTEMS

3.1 Chilled Water Coil

The evaporator coil shall be of draw through air design for uniform air distribution. The chilled water coil shall be quality construction of seamless copper tube, mechanically bonded to hydrophilic aluminium fins with galvanized coil plates. The coil shall be factory leak and pressure tested to 450psig (31 bar) and sealed prior to shipment. Copper pipe for brazed connection shall be provided as standard. A galvanized and painted drain pan shall be provided to cover the entire coil area. The drain pan shall be designed to incorporate sloped gutter for complete condensate removal.

3.2 Chilled Water Control

The water circuit shall include 3-way forged brass valve and modulating actuators. The microprocessor positions the valve in response to room condition. Cooling capacity shall be controlled by bypassing chilled water around the coil.

4 OPTIONS

4.1 Stainless Steel Drain Pan

A stainless steel condensate drain pan shall be provided for the evaporator/chilled water coil in lieu of standard galvanized and painted drain pan.

4.2 Discharge Plenum (Up-flow Units only)

A discharge plenum box shall be provided for field installation on the top of the up-flow unit. The plenum box shall be 18 inches (457mm) high, insulated and painted to match the color of the indoor unit. The plenum box shall be fitted with double deflection grilles for room discharge of conditioned air.

4.3 Steam Generating Humidifier

Humidifier shall be factory installed inside the unit. The humidification system shall be an electrode cylinder type, complete with fill valve, drain valve, adjustable humidity output and automatic flush cycle activated on demand from the microprocessor control system.

4.4 Hot Gas Bypass (DX Systems only)

The refrigerant circuit(s) shall be provided with a hot gas bypass system for evaporator freeze-protection and capacity modulation during low load conditions.

4.5 Liquid Line Solenoid Valve (DX Systems only)

A factory fitted liquid line solenoid valve shall be provided for each refrigeration circuit as an option.

4.6 Double Skin Panels

All panels shall be provided with galvanized internal skin.

4.7 Hydrophilic or Copper Fin for Condenser Coil (DBRC)

Condenser coils shall be provided with hydrophilic or copper fins in lieu of aluminium.

4.8 Black Color Epoxy Powder Coating for Remote Condenser (DBRC)

The remote condenser DBRC shall be epoxy powder coated oven baked black color paint in lieu of standard beige color.

4.9 Under Floor Water Detector

A remote water leak detector shall be factory provided for field installation. When water leak is detected, cooling mode of the unit is off.

4.10 Smoke Detector

A smoke detector shall be supplied loose for remote mounting. The unit shall shut down when smoke alarm is triggered.

4.12 BMS communication cards

BMS communication card shall be factory installed to enable high level interfacing with BMS system. ModBus, BACnet, LONworks, SNMP communication protocols shall be available as option.

4.13 Low Ambient Kit

Fan cycling for better performance during low ambient.



Malaysia

Lot 5755-6,
Kidamai Industrial Park,
Bukit Angkat,
43000 Kajang,
Selangor, Malaysia

Tel: +603-8924 9000
Fax: +603-8739 5020

China

No. 1 Dunham-Bush Road,
Laishan District,
Yantai,
Shandong Province,
China 264003

Tel: +86-535-739 7888
Fax: +86-535-739 7999

United Kingdom

8 Downley Road,
Havant,
Hampshire,
England PO9 2JD

Tel : +44-23-9247 7700
Fax: +44-23-9245 0396

United States of America

1800 SE 38th Avenue,
Homestead,
Florida 33035
United States of America

Tel: +1(786)-800 9999
Fax: +1(786)-527 3539

United Arab Emirates

Office # 2606,
Fortune Executive Towers,
Cluster T1, Jumeirah Lake Tower
Dubai, UAE

Tel: +971-4-443 9207
Fax: +971-4-443 9208

South Africa

No. 57 Sovereign Drive
Route 21 Corporate Park
Irene, Pretoria
South Africa

Tel: +27-12-345 4202
Fax: +27-12-345 4203

India

Unit no : 804 , 8th Floor
Spaze Platinum Towers,
Sector-47, Sohna Road,
Gurgaon-122018, India

Tel: +91-124-414 4430

Indonesia

The Boulevard Office,
3F2 Jl. Fachrudin No.5,
Kp. Bali, Tanah Abang
Jakarta Pusat - 10250, Indonesia

Tel: +62-21-2123 1392

Thailand

48/39 Soi Praditmanutham 19
Praditmanutham Road,
Lat Pharo, Bangkok 10230
Thailand

Tel: +66-0-2610 3749
Fax: +66-0-2610 3601

Singapore

2 Kallang Pudding Road
#07-07 Mactech Building
Singapore 349307

Tel: +65-6842 2012
Fax: +65-6842 2013

Vietnam

10th Floor, Nam A Bank Tower,
201-203 Cach Mang Thang 8 Street,
District 3, Ho Chi Minh City,
Vietnam

Tel: +84-8-6290 3108
Fax: +84-8-6290 3109

DUNHAM-BUSH®

info@dunham-bush.com
www.dunham-bush.com



Products that perform...By people who care

Manufacturer reserves the right to change specifications without prior notice.

M-S-0706A-0721