

SINCE 1894...



# PROmetheus

## Magnetic Bearing Variable Speed Centrifugal Chiller

### DCLC-M 50/60Hz

Cooling Capacity: 264~3095kW ( 75~880RT )

Dunham-Bush Air Conditioning




# MILESTONE



## Dunham-Bush Profile

Dunham-Bush, one of the world's top commercial air conditioning manufacturers, has long been committed to offering creative solutions for the customer's requirements over its 120 years history in the HVAC/R. Dunham-Bush offers a complete range of HVAC/R products such as large chillers, unitary, airside system and thermal energy storages for residences, commercial buildings and industrial facilities. Dunham-Bush is striving to be the leader in the commercialization of green technologies. Today, by utilizing our global network of sales and service offices, Dunham-Bush is offering our value-added products and solutions to all corners of the world.

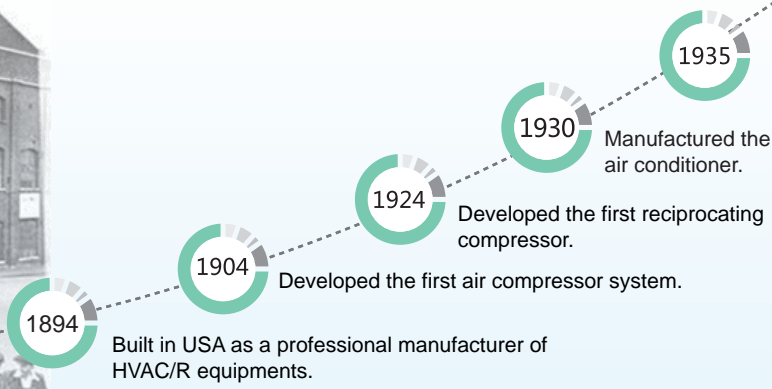



Today, and Beyond  
Innovations... never ends

2019 Dunham-Bush built factory in Miami, USA

2014 Dunham-Bush launched oil free magnetic bearing chiller.

2013 New compressor R&D center was founded in UK to engage in high tier compressor technology.

2008 Dunham-Bush launched its new logo to match its new global brand & business strategy.

2007 Dunham-Bush launched high efficiency dual stage centrifugal chiller.

1998 Dunham-Bush built factory in Kajang, Malaysia. Later built Global Headquarters there in 2000.

1996 Hartford Compressors Incorporated was built in USA.

1995 Dunham-Bush built factory in Yantai, China.

1967 Patented the technology to use a screw compressor for refrigeration / cooling.

1948 Dunham-Bush built factory in Connecticut, USA.

Dunham-Bush built factory in Havant, United Kingdom.

first air cooled



CHINA



MALAYSIA



## DUNHAM-BUSH MALAYSIA

Dunham-Bush Malaysia; founded in 1987, adhered to the innovation system of focusing on customers' demands to drive global research & design, and superior quality manufacturing. Nowadays Dunham-Bush Malaysia are creating innovative cooling solutions appropriate to the individual requirements of commercial building, schools, hospitals, airports, factories and residences. No matter where you are, what we deliver is the same: high performing, highly engineered cooling solutions developed to take on the challenges of the 21st century.

## PRoMetheus Magnetic Bearing Variable Speed Centrifugal Chiller DCLC-M




### Dunham-Bush PRoMetheus DCLC-M Series Introduction


Dunham-bush DCLC-M Centrifugal chillers with State-Of-The-Art magnetic bearing oil-free compressor offers owner packaged chiller with supreme efficiency, reliability and sustainability.

### Features and Benefits

DCLC-M Centrifugal Chillers are designed to exceed ASHRAE Standard 90.1 requirements. The cutting edge magnetic bearing oil-free compressor, superior evaporator and condenser, Electronic Expansion Valve (EEV) and the intelligent chiller controller ensures the DCLC-M performance and stability when operates at both full load and part load conditions.

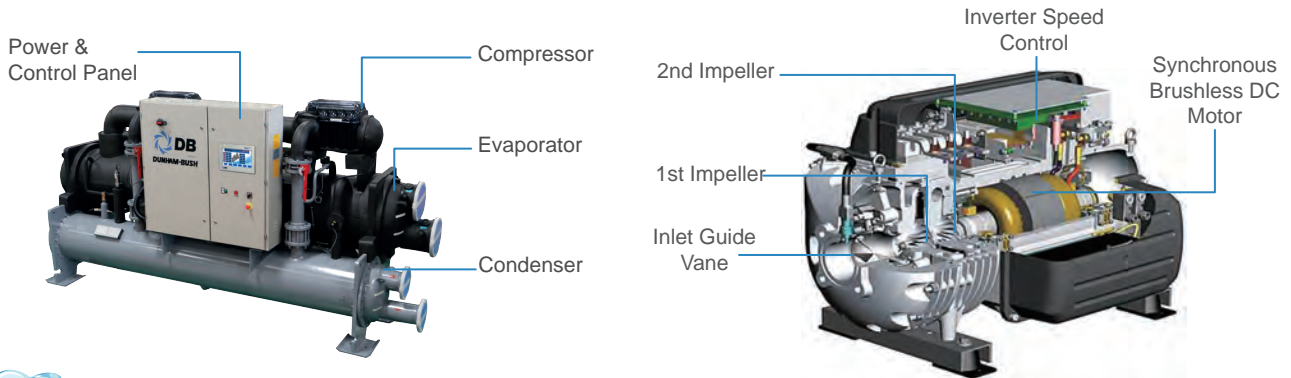

### Nomenclature

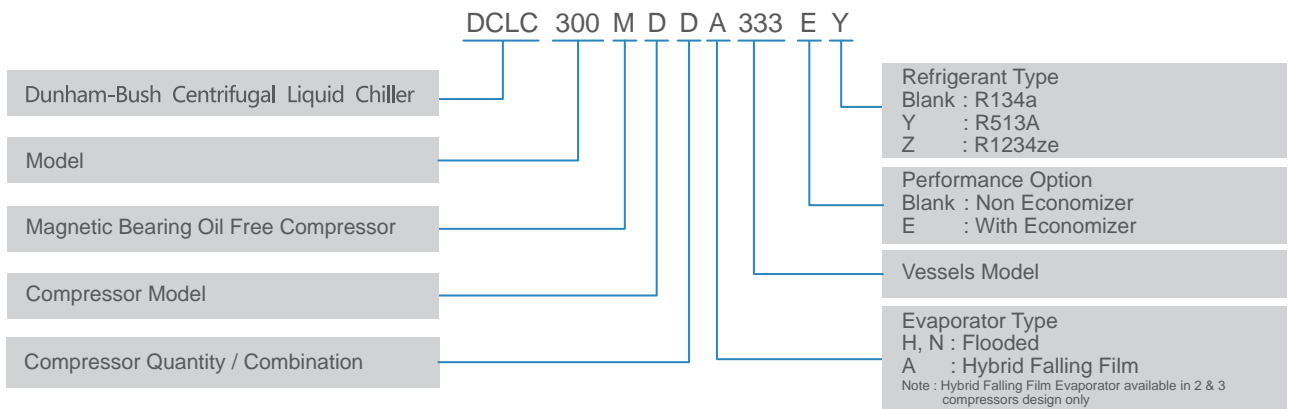


# FEATURES



## Advanced Technology


### Magnetic Bearing

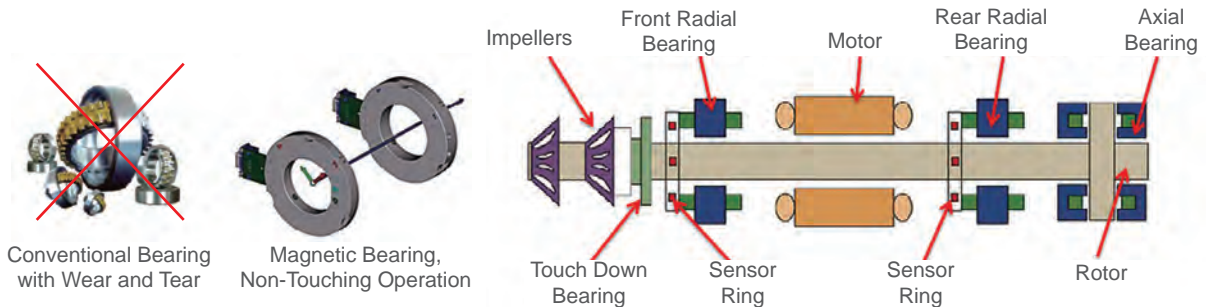

The axially and radially located magnetic bearings create electromagnetic field which levitates the shaft during rotation and float on the magnetic cushion. This has prevented contact between compressor shaft and other metallic surfaces, and thus, the oil lubrication system is no longer needed. The proximity sensors at bearings sense rotor movements and adjustment are made accordingly in the rate of 6,000,000 times per minute. This ensures precision of rotor position in the magnetic field.

### Power Failure Protection

In the case of power failure, the capacitors (4 x 8000 $\mu$ F) provide backup power to bearings to keep the rotor levitated. The rotor will continue to rotate with its rotational inertia, and this will turn the motor into a generator which will then power itself down to a stop.

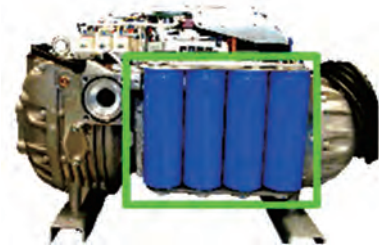

### Inverter Speed Control & Soft-starter



The Magnetic Bearing compressor is furnished with built-in inverter speed control and soft-starter, with below advantages:

- No surge current
- Wide operating range, can work at 10% minimum load
- High efficiency throughout the working range
- Auto-tuning on rotation speed to eliminate compressor surging

### Direct Drive Rotor & Impeller


The impellers are keyed directly to the shaft and this is the only major moving compressor component. No transmission device needed and thus, eliminate the transmission losses and the compressor size can be much compact.

As no mechanical contact during the rotation, the unit noise level is greatly reduced.





## Dual-Stage Compression



DCLC-M compressors are with dual-stage compression design. Compressors with dual-stage compression technology can be operated at higher lift and wider operating range. With the built-in inverter speed control, DCLC-M can be operated stably and efficiently at a wider operating range.

## Liquid Refrigerant Control

Electronic Expansion Valve (EEV), can precisely control the liquid refrigerant amount into the evaporator for optimum heat transfer and better capacity control.



## Rapid Recovery

Conventional centrifugal chiller needs to ensure oil lubrication at right pressure and temperature before starting the compressor motor. Even with essential power supply to the oil lubrication system, it will easily take more than a minute to restart the compressor motor. Thanks to the oil-free technology, DCLC-M chillers can rapidly recover from a power failure with much shorter restart time. This is a great feature especially for data center and process cooling applications.

## Energy Saving

- No Friction Loss – Compressor shaft has no physical contact with other mechanical components
- No Transmission Loss – With direct drive design at compressor shaft, conventional gear transmission is eliminated
- No Lubrication Oil – DCLC-M is Oil-Free. Heat exchanger's de-rating performance due to lubricating oil is prevented.
- High COP – DCLC-M full load COP is up to 6.54 [0.538kW/ton]; IPLV is up to 11.8 [0.298kW/ton], far more efficient than conventional centrifugal chillers.

Below table shows an example to compare annual energy consumed by a 300RT DCLC-M (DCLC-300MD) versus a conventional 300RT centrifugal chiller, with 3000 hours operating time annually.

| Model                                 | DCLC300MD | Conventional 300RT |
|---------------------------------------|-----------|--------------------|
| Cooling Capacity (KW)                 | 1055KW    | 1055KW             |
| IPLV                                  | 11.8      | 6.52               |
| Annual Electricity Consumption (KW.h) | 182,482   | 279,278            |
| Electricity Saving (KW.h)             | 96,796    |                    |



Save 35% Energy

# FEATURES



## Easy Maintenance




- **No Oil Lubrication System-**  
Improve unit reliability. Free from lubrication oil related problems, such as low oil level, low oil pressure and etc.
- **Direct Drive Impeller-**  
Only one major moving part in the compressor, less components, less failure.
- **Easy Maintenance-**  
Without oil lubrication system, routine maintenance becomes very simple. The compressor is virtually maintenance free.
- **No Overhauling-**  
Periodic overhauling is not required for DCLC-M chillers.

| Maintenance work                                   | Standard Chiller R123 | Standard Chiller R134a | PRoMetheus DCLCM |
|--|-----------------------|------------------------|------------------|
| Change the lubrication oil                         | Once a year           | Each three year        | Not required     |
| Change oil filter core                             | Once a year           | Once a year            | Not required     |
| Check oil pump pressure                            | Once a quarter        | Once a quarter         | Not required     |
| Check oil quality                                  | Once a week           | Once a week            | Not required     |
| Check the pressure differential through oil filter | Once a month          | Once a month           | Not required     |
| Compressor Vibration test                          | Once a year           | Once a year            | Not required     |
| Oil pump insulation inspection                     | Each three year       | Each three year        | Not required     |
| Oil heater inspection                              | Each three year       | Each three year        | Not required     |
| Motor winding inspection                           | Once a year           | Once a year            | Not required     |
| Contact and overload set inspection                | Once a year           | Once a year            | Not required     |
| Refrigerant inspection                             | Once a week           | Not required           | Not required     |
| Change refrigerant filter core                     | Once a quarter        | Not required           | Not required     |

## Environmental Protection

- Refrigerant type - Dunham Bush DCLCM chiller is operated with R134a refrigerant, an environmental friendly refrigerant with zero Ozone Depletion Potential (ODP) and no phase out date as per Montreal Protocol. Also compatible with HFO R513A and R1234ze refrigerants, a low GWP substance and zero ODP in promoting environmental sustainability and minimize the global warming effect.
- Refrigerant usage - Pioneering in flooded heat exchanger technology, Dunham Bush takes another step in optimizing the refrigerant usage by introducing a falling film evaporator in the design, that contains a balance of flooded and falling film technology. A special design on the distribution system and the tubes alignment to yield a uniform refrigerant flow for better heat transfer coefficient resulted a greater overall efficiency while maintain the reliable control.
- Low vibration - The rotating impeller and shaft is levitated at the magnetic field cushion, and have no physical contact with other components during the operation. Therefore, the unit structural vibration is virtually zero. With the permanent magnet DC brushless motor, the noise level is further reduced. Dunham-Bush DCLC-M centrifugal chillers will be best solution for installation at sound level sensitive area.

Measured in accordance with AHRI-575

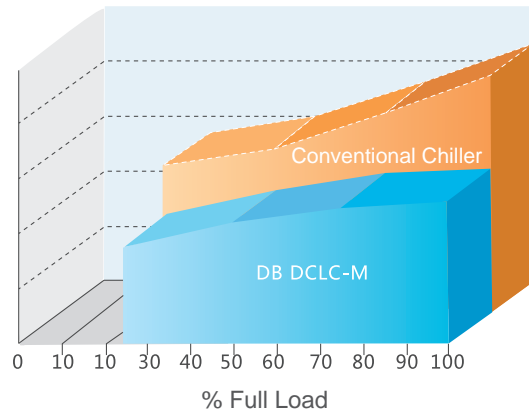


- Low noise - Compressor noise level as low as 73 dB(A). Chiller Plantroom does not required acoustic treatment.
- LEED points - Helps to earn points in Energy and Atmosphere category for LEED certification.



## Intelligent Control System

- Low starting current thanks to inverter speed control and softstarter
- High level interface advanced controller
- 10 inch color touch screen panel
- Display unit operating parameters
- Programmable unit operating schedule
- Self diagnosis on alarm. Last 10 alarms are recorded
- Single power point connection
- BMS communication protocol - Modbus, BACnet, Profibus

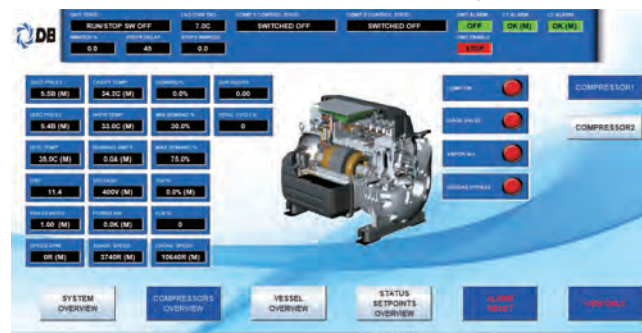




# FEATURES



## BMS Connectivity, Chiller Plantroom Control

- Built-in ModBus RTU RS485 port for direct interfacing of Building Management System (BMS). Profibus RS485 communication protocol is available as option
- DB Chiller Plant Manager, DB-CPM, a trustworthy and headache-free solution for building owners and users on chiller plant control and automation system
- DB-CPM's advanced controllers supervise equipments in chiller plant such as chillers, pumps, cooling towers and variable frequency drives (VFD); and monitor field devices such as, flow meters, energy meters, digital power meters, sensors & transducers.
- NetVisorPRO – Monitoring software of DB-CPM system provides graphical animations on system operation, temperature and energy trend graphs, historical data and alarm history logs.
- Chiller plantroom control and automation by Dunham-Bush DB-CPM provides owners a chiller system with stable and optimized performance in its operation.

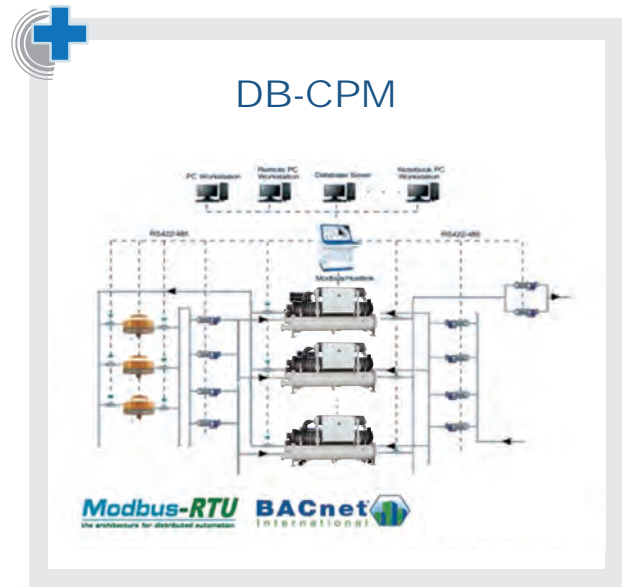

## Standard & Optional Features

| Item   | Standard               | Optional   |
|--|------------------------|--|
| <b>Water Connection</b>                            | Victaulic groove       | Flanged; Marine Waterbox   |
| <b>Design Working Pressure (Vessel-Water Side)</b> | 1.0MPa [150psi]        | 2.1MPa [300psi]  |
| <b>Evaporator Insulation Thickness</b>             | 25mm [1"]              | 50mm [2"]  |
| <b>Compressor Service Valve</b>                    | —                      | Suction & Discharge  |
| <b>Spring Isolator</b>                             | —                      | Neoprene Pad; Spring Isolator  |
| <b>Compressor Main Power Isolation</b>             | Main Incoming Isolator | Compressor Circuit Breaker   |
| <b>Main Incoming Options</b>                       | —                      | Ground Fault Protection (GFI); Digital Power Meter (DPM); EMI Filter |
| <b>Communication Protocol</b>                      | Modbus RS485           | BACnet MSTP; LONworks; ModBus TCPIP; BACnet TCPIP                    |
| <b>Vessel Code Compliance</b>                      | —                      | ASME   |
| <b>Compressor Extended Warranty</b>                | 1 Year                 | 2 Years; 5 Years   |



# SPECIFICATIONS



## DCLC-M Technical Specifications


### R134a / R513A

| Model      | Compressor Qty | Unit Dimensions |             |             | Unit Weight   |              |
|------------|----------------|-----------------|-------------|-------------|---------------|--------------|
|            |                | Length          | Width       | Height      | Operating     | Shipping     |
|            |                | mm [inch]       | mm [inch]   | mm [inch]   | kg [lbs]      | kg [lbs]     |
| DCLC80MAS  | 1              | 2570 [101.0]    | 1220 [48.2] | 2010 [79.0] | 1998 [4405]   | 1722 [3796]  |
| DCLC120MCS | 1              | 2570 [101.0]    | 1220 [48.2] | 2010 [79.0] | 2795 [6162]   | 2371 [5227]  |
| DCLC150MDS | 1              | 2570 [101.0]    | 1220 [48.2] | 2010 [79.0] | 2992 [6596]   | 2495 [5501]  |
| DCLC200MFS | 1              | 3940 [155.0]    | 1220 [48.2] | 2010 [79.0] | 3720 [8201]   | 3042 [6706]  |
| DCLC240MCD | 2              | 3840 [151.0]    | 1220 [48.2] | 2010 [79.0] | 4092 [9021]   | 3362 [7412]  |
| DCLC300MDD | 2              | 3890 [152.9]    | 1230 [48.4] | 2070 [81.6] | 5014 [11054]  | 4139 [9125]  |
| DCLC400MFD | 2              | 3995 [157.3]    | 1896 [74.7] | 2070 [81.6] | 6206 [13673]  | 4991 [11003] |
| DCLC450MDT | 3              | 5530 [217.7]    | 1963 [77.3] | 2200 [86.6] | 8891 [19601]  | 7065 [15576] |
| DCLC600MFT | 3              | 4385 [172.6]    | 1963 [77.3] | 2200 [86.6] | 8739 [19266]  | 6768 [14921] |
| DCLC800MFF | 4              | 4950 [194.9]    | 2150 [84.6] | 2173 [85.5] | 11015 [24284] | 8413 [18547] |

### R1234ze


| Model      | Compressor Qty | Unit Dimensions |             |             | Unit Weight  |              |
|------------|----------------|-----------------|-------------|-------------|--------------|--------------|
|            |                | Length          | Width       | Height      | Operating    | Shipping     |
|            |                | mm [inch]       | mm [inch]   | mm [inch]   | kg [lbs]     | kg [lbs]     |
| DCLC95MPS  | 1              | 2570 [101.0]    | 1220 [48.2] | 2010 [79.0] | 1924[4241]   | 1752 [3862]  |
| DCLC120MQS | 1              | 3940 [155.0]    | 1220 [48.2] | 2010 [79.0] | 3155 [6956]  | 2808 [6191]  |
| DCLC150MRS | 1              | 3940 [155.0]    | 1220 [48.2] | 2010 [79.0] | 3162 [6972]  | 2815 [6207]  |
| DCLC190MPD | 2              | 3840 [151.0]    | 1220 [48.2] | 2010 [79.0] | 3480 [7672]  | 3133 [6907]  |
| DCLC240MQD | 2              | 3890 [153.1]    | 1230 [48.4] | 2070 [81.5] | 4475 [9865]  | 4013 [8847]  |
| DCLC285MPT | 3              | 4864 [191.5]    | 1896 [74.6] | 2068 [81.4] | 6575 [14496] | 5784 [12752] |
| DCLC300MRD | 2              | 3890 [153.1]    | 1230 [48.4] | 2070 [81.5] | 4488 [9895]  | 4026 [8877]  |
| DCLC360MQT | 3              | 4924 [193.9]    | 1963 [77.3] | 2200 [86.6] | 7239 [15960] | 6297 [13883] |
| DCLC450MRT | 3              | 4924 [193.9]    | 1963 [77.3] | 2200 [86.6] | 7260 [16005] | 6318 [13928] |
| DCLC480MQF | 4              | 4950 [194.9]    | 2150 [84.6] | 2173 [85.5] | 8508 [18757] | 7325 [16149] |
| DCLC600MRF | 4              | 4950 [194.9]    | 2150 [84.6] | 2173 [85.5] | 8972 [19780] | 7642 [16847] |

# DIMENSIONS

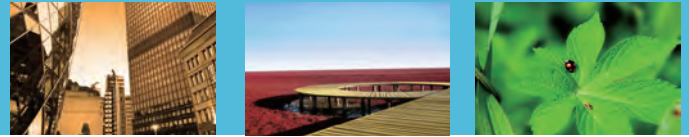


## Unit Dimensions

### Single Compressor

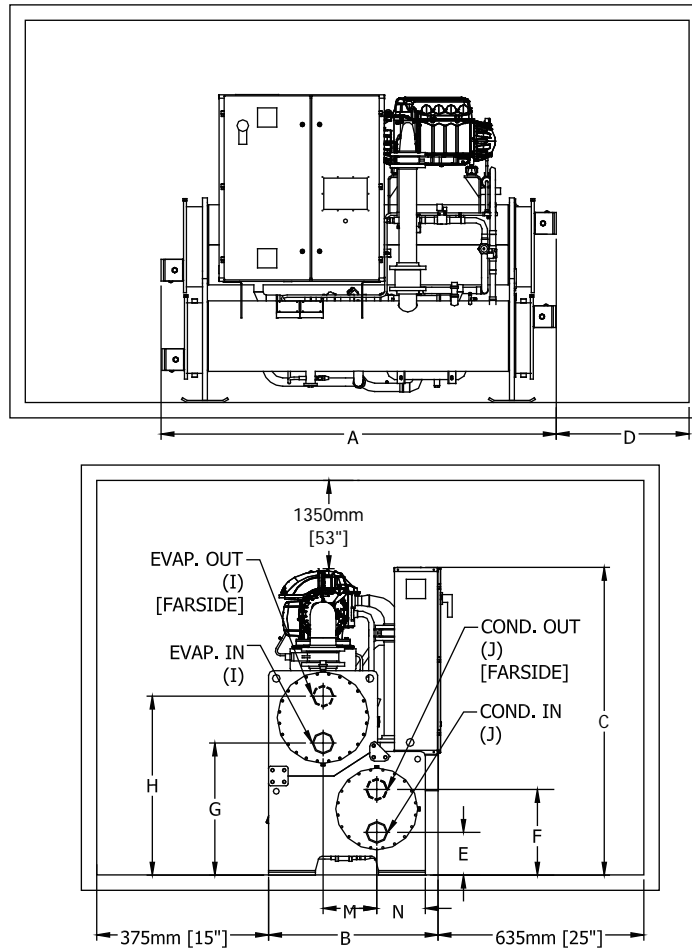

| Model                | Length<br>"A"   | Width<br>"B"   | Height<br>"C"  | Clearance For Tube<br>Cleaning "D" | E             | F             | G             | H              | M             | N             | Condenser<br>Water Conn. "J" | Evaporator<br>Water Conn. "I" |
|----------------------|-----------------|----------------|----------------|------------------------------------|---------------|---------------|---------------|----------------|---------------|---------------|------------------------------|-------------------------------|
|                      | mm [inch]       |                |                |                                    |               |               |               |                |               |               |                              |                               |
| <b>R134a / R513A</b> |                 |                |                |                                    |               |               |               |                |               |               |                              |                               |
| DCLC80MAS            | 2570<br>[101.0] | 1220<br>[48.2] | 2010<br>[79.0] | 2100<br>[82.7]                     | 278<br>[11.0] | 558<br>[22.0] | 860<br>[33.9] | 1164<br>[45.8] | 349<br>[13.7] | 316<br>[12.4] | 5" NPS                       | 5" NPS                        |
| DCLC120MCS           | 2570<br>[101.0] | 1220<br>[48.2] | 2010<br>[79.0] | 2100<br>[82.7]                     | 278<br>[11.0] | 558<br>[22.0] | 860<br>[33.9] | 1164<br>[45.8] | 349<br>[13.7] | 316<br>[12.4] | 5" NPS                       | 5" NPS                        |
| DCLC150MDS           | 2570<br>[101.0] | 1220<br>[48.2] | 2010<br>[79.0] | 2100<br>[82.7]                     | 278<br>[11.0] | 558<br>[22.0] | 860<br>[33.9] | 1164<br>[45.8] | 349<br>[13.7] | 316<br>[12.4] | 5" NPS                       | 5" NPS                        |
| DCLC200MFS           | 3940<br>[155.0] | 1220<br>[48.2] | 2010<br>[79.0] | 3500<br>[137.8]                    | 292<br>[11.5] | 571<br>[22.5] | 854<br>[33.6] | 1197<br>[47.1] | 364<br>[14.3] | 317<br>[12.5] | 5" NPS                       | 5" NPS                        |
| <b>R1234ze</b>       |                 |                |                |                                    |               |               |               |                |               |               |                              |                               |
| DCLC95MPS            | 2570<br>[101.0] | 1220<br>[48.2] | 2010<br>[79.0] | 2100<br>[82.7]                     | 278<br>[11.0] | 558<br>[22.0] | 860<br>[33.9] | 1164<br>[45.8] | 349<br>[13.7] | 316<br>[12.4] | 5" NPS                       | 5" NPS                        |
| DCLC120MQS           | 3940<br>[155.0] | 1220<br>[48.2] | 2010<br>[79.0] | 3500<br>[137.8]                    | 288<br>[11.3] | 574<br>[22.6] | 851<br>[33.5] | 1201<br>[47.3] | 364<br>[14.3] | 317<br>[12.5] | 6" NPS                       | 8" NPS                        |
| DCLC150MRS           | 3940<br>[155.0] | 1220<br>[48.2] | 2010<br>[79.0] | 3500<br>[137.8]                    | 288<br>[11.3] | 574<br>[22.6] | 851<br>[33.5] | 1201<br>[47.3] | 364<br>[14.3] | 317<br>[12.5] | 6" NPS                       | 8" NPS                        |


Notes: 1) Above dimensions are based on standard unit, with 3 passes flooded evaporator and condenser, 1.0MPa [150psi] water side service pressure.  
 2) Unit layout shown are for a reference. Same orientation may vary.  
 3) Certified drawings are available upon request.

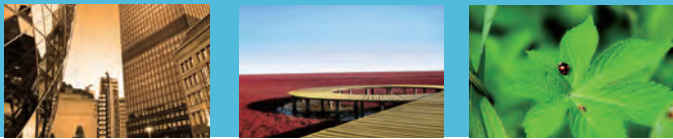

# DIMENSIONS

## Unit Dimensions


### Twin Compressors

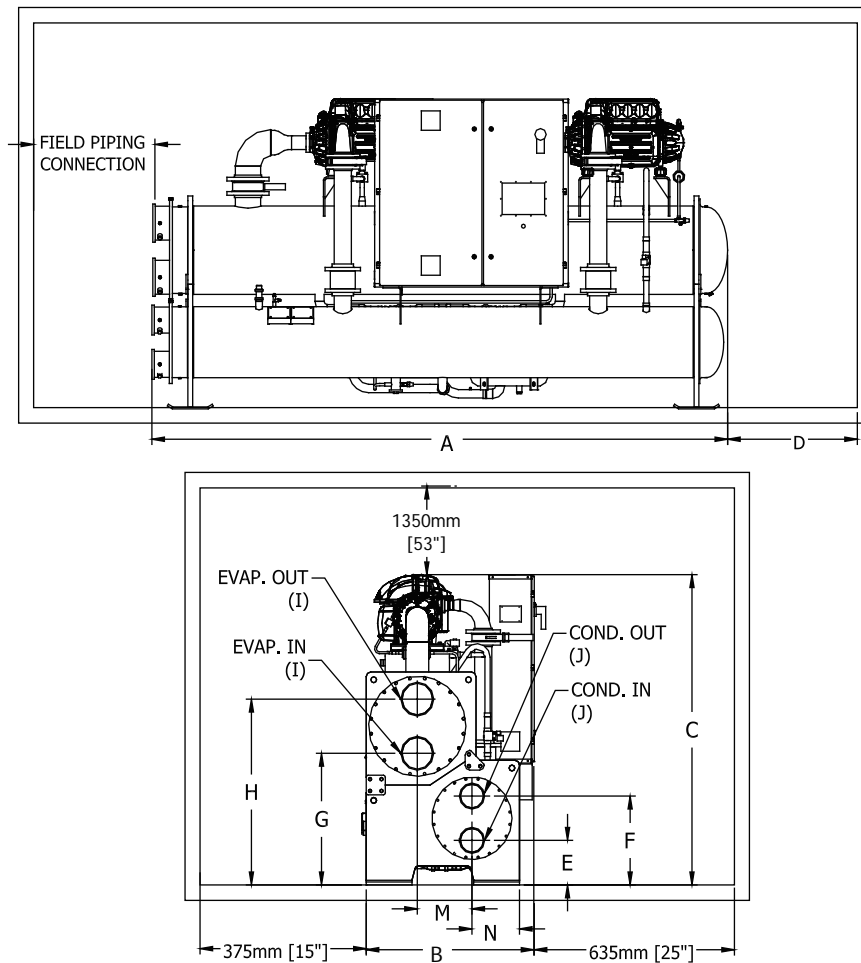

| Model                | Length<br>"A"   | Width<br>"B"   | Height<br>"C"  | Clearance For<br>Tube Cleaning "D" | E             | F             | G             | H              | M             | N             | Condenser<br>Water Conn. "J" | Evaporator<br>Water Conn. "I" |
|----------------------|-----------------|----------------|----------------|------------------------------------|---------------|---------------|---------------|----------------|---------------|---------------|------------------------------|-------------------------------|
|                      | mm [inch]       |                |                |                                    |               |               |               |                |               |               |                              |                               |
| <b>R134a / R513A</b> |                 |                |                |                                    |               |               |               |                |               |               |                              |                               |
| DCLC240MCD           | 3840<br>[151.0] | 1220<br>[48.2] | 2010<br>[79.0] | 3500<br>[137.8]                    | 288<br>[11.3] | 574<br>[22.6] | 851<br>[33.5] | 1201<br>[47.3] | 364<br>[14.3] | 317<br>[12.5] | 6" NPS                       | 8" NPS                        |
| DCLC300MDD           | 3890<br>[152.9] | 1230<br>[48.4] | 2070<br>[81.6] | 3500<br>[137.8]                    | 292<br>[11.5] | 641<br>[25.2] | 911<br>[35.9] | 1261<br>[49.6] | 375<br>[14.7] | 355<br>[14.0] | 6" NPS                       | 8" NPS                        |
| DCLC400MFD           | 3995<br>[157.3] | 1896<br>[74.7] | 2070<br>[81.6] | 3500<br>[137.8]                    | 435<br>[17.1] | 805<br>[31.7] | 580<br>[22.8] | 930<br>[36.6]  | 841<br>[33.1] | 400<br>[15.7] | 8" NPS                       | 8" NPS                        |
| <b>R1234ze</b>       |                 |                |                |                                    |               |               |               |                |               |               |                              |                               |
| DCLC190MPD           | 3840<br>[151.0] | 1220<br>[48.2] | 2010<br>[79.0] | 3500<br>[137.8]                    | 288<br>[11.3] | 574<br>[22.6] | 851<br>[33.5] | 1201<br>[47.3] | 364<br>[14.3] | 317<br>[12.5] | 6" NPS                       | 8" NPS                        |
| DCLC240MQD           | 3890<br>[152.9] | 1230<br>[48.4] | 2070<br>[81.6] | 3500<br>[137.8]                    | 292<br>[11.5] | 641<br>[25.2] | 911<br>[35.9] | 1261<br>[49.6] | 375<br>[14.7] | 355<br>[14.0] | 6" NPS                       | 8" NPS                        |
| DCLC300MRD           | 3890<br>[152.9] | 1230<br>[48.4] | 2070<br>[81.6] | 3500<br>[137.8]                    | 292<br>[11.5] | 641<br>[25.2] | 911<br>[35.9] | 1261<br>[49.6] | 375<br>[14.7] | 355<br>[14.0] | 6" NPS                       | 8" NPS                        |



Notes: 1) Above dimensions are based on standard unit, with 2 passes flooded evaporator and condenser, 1.0MPa [150psi] water side service pressure, left hand side water piping connection (view from control panel).  
 2) Unit layout shown are for a reference. Same orientation may vary.  
 3) Certified drawings are available upon request.

# DIMENSIONS



## Unit Dimensions

### Three Compressors

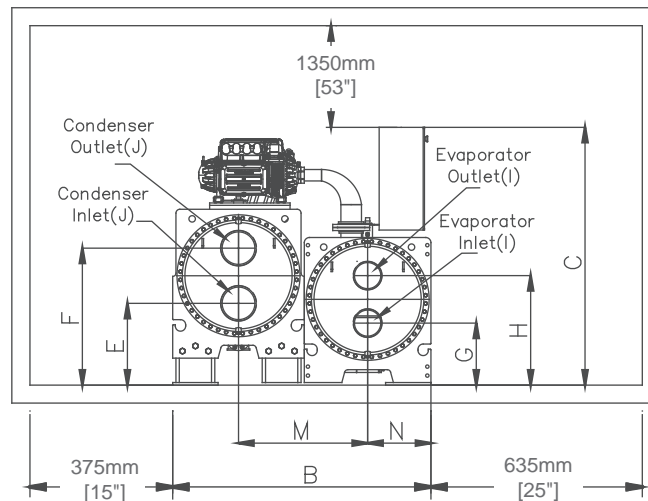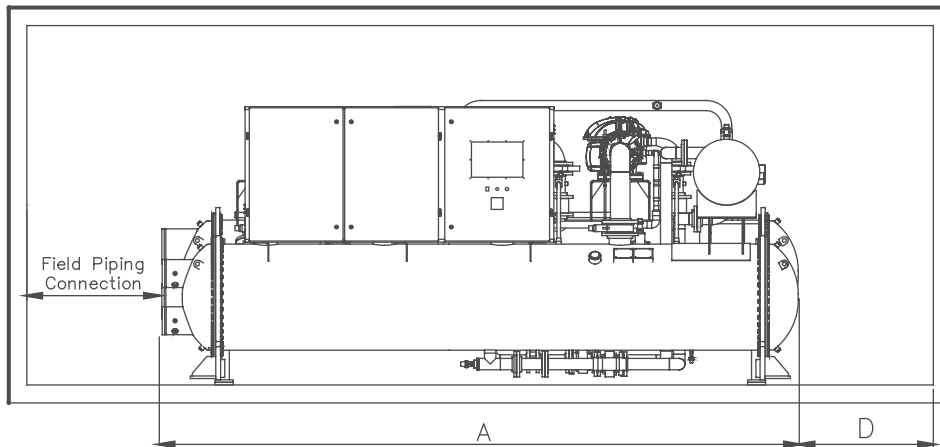

| Model                | Length "A"      | Width "B"      | Height "C"     | Clearance For Tube Cleaning "D" | E          | F          | G          | H             | M             | N             | Condenser Water Conn. "J" | Evaporator Water Conn. "I" |
|----------------------|-----------------|----------------|----------------|---------------------------------|------------|------------|------------|---------------|---------------|---------------|---------------------------|----------------------------|
|                      | mm [inch]       |                |                |                                 |            |            |            |               |               |               |                           |                            |
| <b>R134a / R513A</b> |                 |                |                |                                 |            |            |            |               |               |               |                           |                            |
| DCLC450MDT           | 5530<br>[217.7] | 1963<br>[77.3] | 2200<br>[86.6] | 4900 [192.9]                    | 535 [21.1] | 905 [35.6] | 570 [22.4] | 940<br>[37.0] | 950<br>[37.4] | 464<br>[18.3] | 8" NPS                    | 8" NPS                     |
| DCLC600MFT           | 4385<br>[172.6] | 1963<br>[77.3] | 2200<br>[86.6] | 3800 [149.6]                    | 535 [21.1] | 905 [35.6] | 570 [22.4] | 940<br>[37.0] | 950<br>[37.4] | 464<br>[18.3] | 8" NPS                    | 8" NPS                     |
| <b>R1234ze</b>       |                 |                |                |                                 |            |            |            |               |               |               |                           |                            |
| DCLC285MPT           | 4864<br>[191.5] | 1896<br>[74.6] | 2068<br>[81.4] | 4300<br>[169.3]                 | 435 [17.1] | 805 [31.7] | 580 [22.8] | 930<br>[36.6] | 841<br>[33.1] | 400<br>[15.7] | 8" NPS                    | 8" NPS                     |
| DCLC360MQT           | 4924<br>[193.9] | 1963<br>[77.3] | 2200<br>[86.6] | 4300<br>[169.3]                 | 535 [21.1] | 905 [35.6] | 570 [22.4] | 940<br>[37.0] | 950<br>[37.4] | 464<br>[18.3] | 8" NPS                    | 8" NPS                     |
| DCLC450MRT           | 4924<br>[193.9] | 1963<br>[77.3] | 2200<br>[86.6] | 4300<br>[169.3]                 | 535 [21.1] | 905 [35.6] | 570 [22.4] | 940<br>[37.0] | 950<br>[37.4] | 464<br>[18.3] | 8" NPS                    | 8" NPS                     |



- Notes: 1) Above dimensions are based on standard unit, with with 2 passes flooded evaporator and condenser, 1.0MPa [150psi] water side service pressure, left hand side water piping connection (view from control panel).  
 2) Unit layout shown are for a reference. Same orientation may vary.  
 3) Certified drawings are available upon request.



# DIMENSIONS

## Unit Dimensions


### Four Compressors

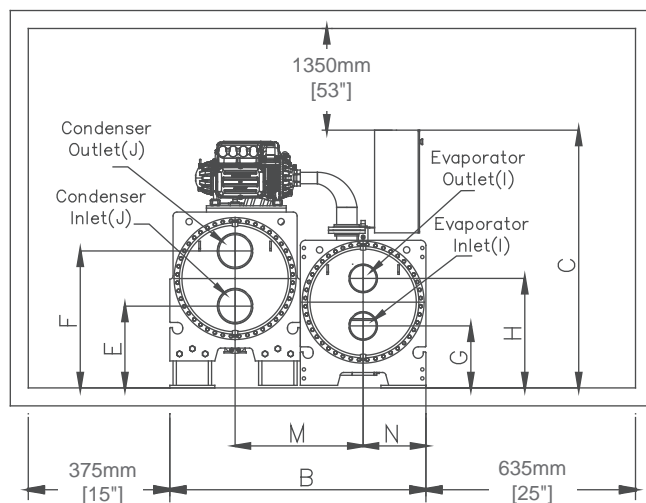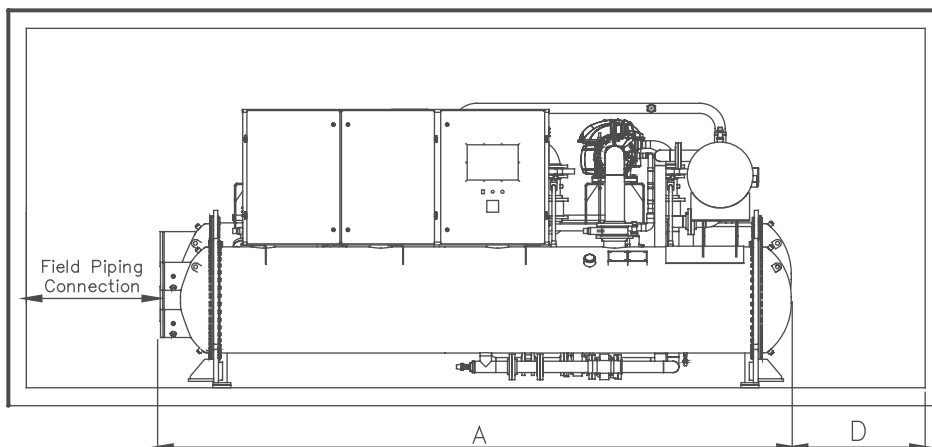

| Model                | Length<br>"A"   | Width<br>"B"   | Height<br>"C"  | Clearance For Tube<br>Cleaning "D" | E          | F          | G          | H              | M              | N             | Condenser<br>Water Conn. "J" | Evaporator<br>Water Conn. "I" |
|----------------------|-----------------|----------------|----------------|------------------------------------|------------|------------|------------|----------------|----------------|---------------|------------------------------|-------------------------------|
|                      | mm [inch]       |                |                |                                    |            |            |            |                |                |               |                              |                               |
| <b>R134a / R513A</b> |                 |                |                |                                    |            |            |            |                |                |               |                              |                               |
| DCLC800MFF           | 4950<br>[194.9] | 2150<br>[84.6] | 2173<br>[85.5] | 4300 [169.3]                       | 480 [18.9] | 850 [33.5] | 635 [25.0] | 1005<br>[39.6] | 1009<br>[39.7] | 489<br>[19.3] | 8" NPS                       | 8" NPS                        |
| <b>R1234ze</b>       |                 |                |                |                                    |            |            |            |                |                |               |                              |                               |
| DCLC480MQF           | 4950<br>[194.9] | 2150<br>[84.6] | 2173<br>[85.5] | 4300<br>[169.3]                    | 480 [18.9] | 850 [33.5] | 635 [25.0] | 1005<br>[39.6] | 1009<br>[39.7] | 489<br>[19.3] | 8" NPS                       | 8" NPS                        |
| DCLC600MRF           | 4950<br>[194.9] | 2150<br>[84.6] | 2173<br>[85.5] | 4300<br>[169.3]                    | 480 [18.9] | 850 [33.5] | 635 [25.0] | 1005<br>[39.6] | 1009<br>[39.7] | 489<br>[19.3] | 8" NPS                       | 8" NPS                        |

- Notes: 1) Above dimensions are based on standard unit, with with 2 passes flooded evaporator and condenser, 1.0MPa [150psij] water side service pressure, left hand side water piping connection (view from control panel).  
 2) Unit layout shown are for a reference. Same orientation may vary.  
 3) Certified drawings are available upon request.

# FIELD WIRING DIAGRAM

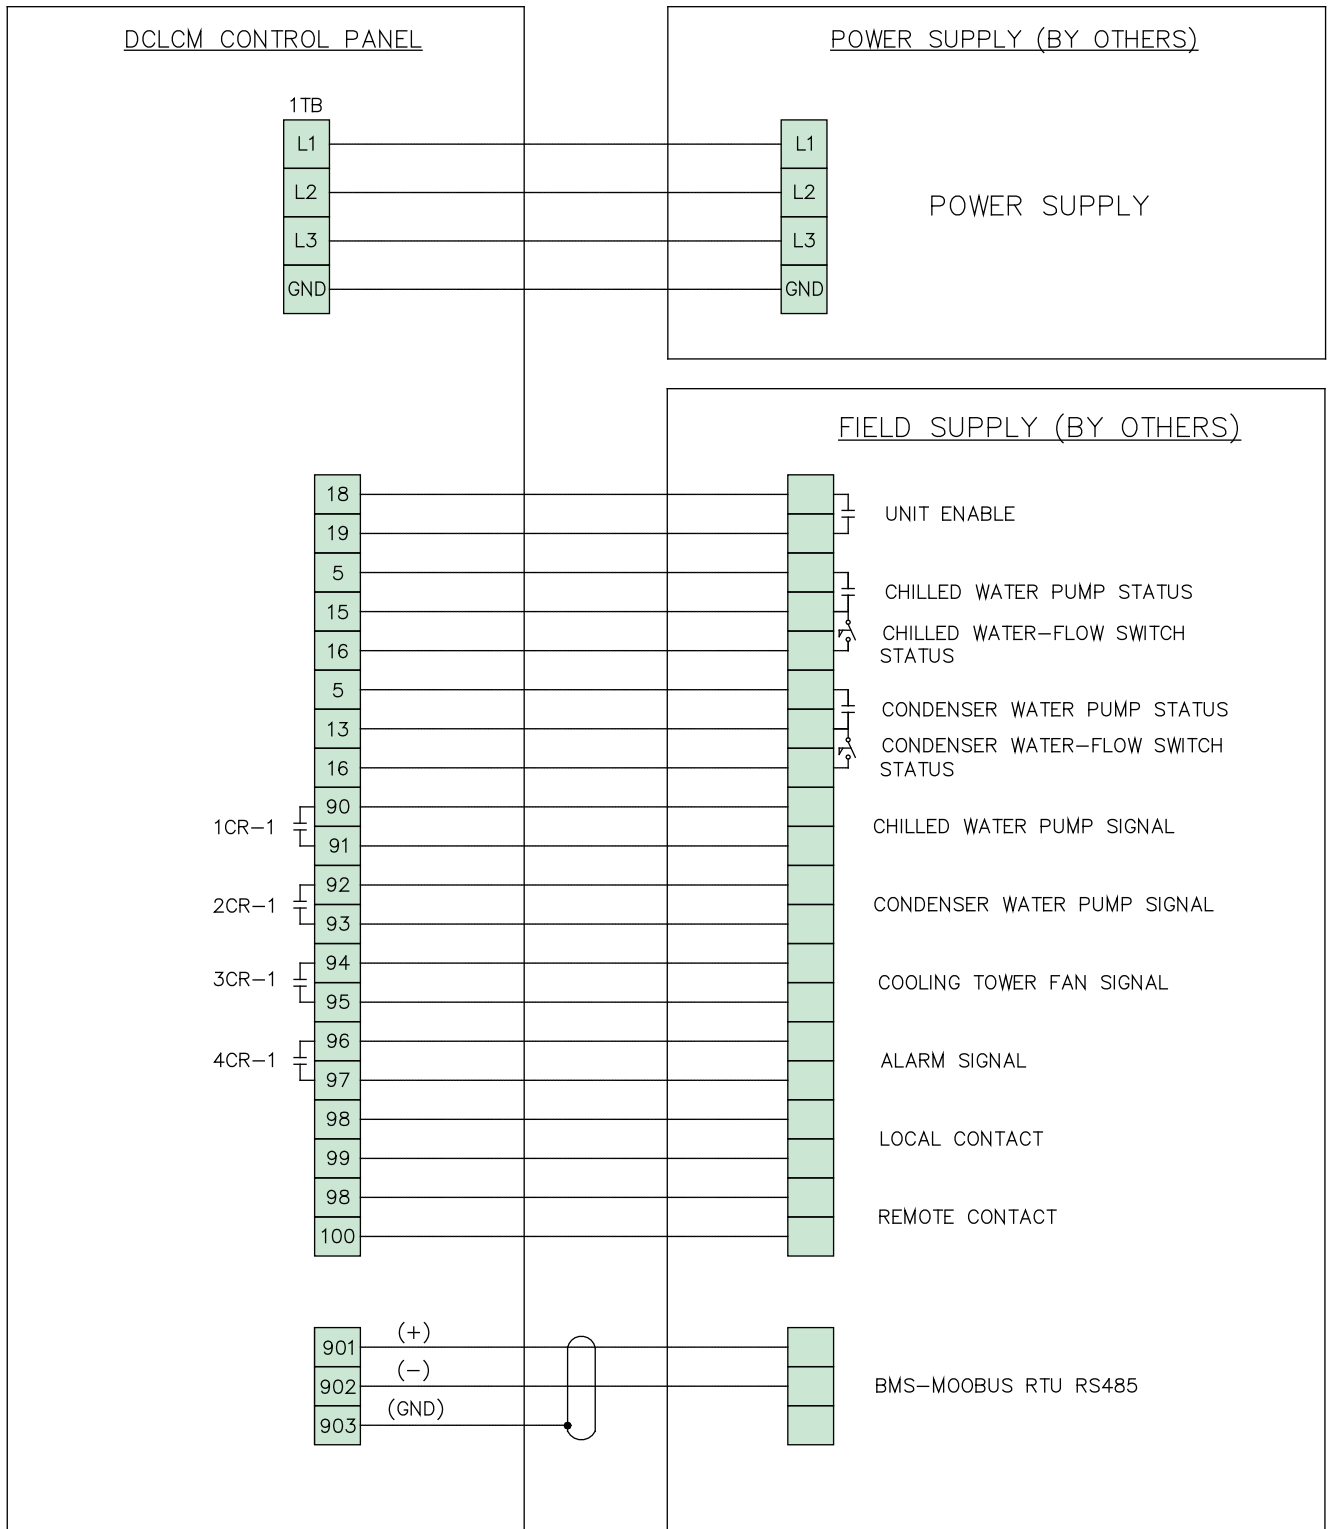



## Malaysia

Lot 5755-6,  
Kidamai Industrial Park,  
Bukit Angkat,  
43000 Kajang,  
Selangor, Malaysia

Tel: +603-8924 9000  
Fax: +603-8739 5020

## China

No.1 Dunham-Bush Road,  
Laishan District,  
Yantai,  
Shandong Province,  
China 264003

Tel: +86-535-739 7888  
Fax: +86-535-739 7999

## United Kingdom

8 Downley Road,  
Havant,  
Hampshire,  
England PO9 2JD

Tel: +44-23-9247 7700  
Fax: +44-23-9245 0396

## United States of America

1800 SE 38th Avenue,  
Homestead,  
Florida 33035  
United States of America

Tel: +1(786)-800 9999  
Fax: +1(786)-527 3539

## United Arab Emirates

Office # 2606,  
Fortune Executive Towers,  
Cluster T1, Jumeirah Lake Tower  
Dubai, UAE

Tel: +971-4-443 9207  
Fax: +971-4-443 9208

## South Africa

No.57 Sovereign Drive  
Route 21 Corporate Park  
Irene, Pretoria  
South Africa

Tel: +27-12-345 4202  
Fax: +27-12-345 4203

## India

Unit no : 804 , 8th Floor  
Spaze Platinum Towers,  
Sector-47, Sohna Road,  
Gurgaon-122018, India

Tel: +91-124-414 4430

## Indonesia

The Boulevard Office,  
3F2 Jl. Fachrudin No.5,  
Kp. Bali, Tanah Abang  
Jakarta Pusat - 10250, Indonesia

Tel: +62-21-2123 1392

## Singapore

2, Kallang Pudding Road  
#07-07 Mactech Building,  
Singapore 349307

Tel: +65-6842 2012  
Fax: +65-6842 2013

## Thailand

48/39 Soi Praditmanutham 19  
Praditmanutham Road,  
Lat Pharo, Bangkok 10230  
Thailand

Tel: +66-0-2610 3749  
Fax: +66-0-2610 3601

## Vietnam

10th Floor, Nam A Bank Tower,  
201-203 Cach Mang Thang 8 Street,  
District 3, Ho Chi Minh City,  
Vietnam

Tel: +84-8-6290 3108  
Fax: +84-8-6290 3109

**DUNHAM-BUSH**®

info@dunham-bush.com  
www.dunham-bush.com

Products that perform...By people who care®

The manufacturer reserves the right to change specifications without prior notice.  
©Dunham-Bush. All rights reserved.



M-S-04104G-1121