



HERCULES

Water Cooled Centrifugal Chillers

DCLCD Series 50/60Hz

Cooling Capacity: 300 to 3000 TR (1055 to 10550 kW)



DUNHAM-BUSH®

Products that perform...By people who care

GENERAL

From the beginning of 20th Century, DB has been providing innovative solutions for the heating, air conditioning and refrigeration needs of its customers. Today's global company has a proud heritage that began over a 100 years' ago.

Customers demand high efficiency products with exceptional value and DB's new range of DCLCD centrifugal chillers satisfy modern market requirements with outstanding energy efficiency and proven technology, designed specifically for environmentally safe refrigerants. This combination ensures the most cost-effective, reliable solution for comfort cooling and process cooling applications.

DB continues to deliver performance with reliability packaged in the most energy efficient way with the introduction of the DCLCD range of centrifugal water chillers.

The major advantages of the DCLCD:

- ✿ High reliability
- ✿ Simple operation and maintenance
- ✿ Low sound levels
- ✿ Dual Stage impeller design for outstanding performance at high lift compression
- ✿ Simplified structure and compact size
- ✿ High efficiency at a competitive market price
- ✿ Designed to use with environmentally friendly R134a and R513A refrigerant


The DCLCD range of chillers is ideal for offices, hospitals, hotels and retail stores as well as industrial applications. The chiller offers a full range of Evaporator/Condenser/Compressor combinations, permitting precise matching of the machine capacity to system requirements. With such a wide range of available combinations, DCLCD units can be configured to provide lowest first cost, lowest operating cost or choice of several criteria important for a particular application. The centrifugal chiller selection software is certified in accordance with the latest AHRI standard 550/ 590. DB Sales Engineers are available to assist in selecting the optimum machine needed to satisfy the particular project requirements.

The DCLCD centrifugal chiller from DB offers superior value and application flexibility, a wide range of options and accessories and the peace of mind that more than 100 years of industry experience is behind this product can be ideally configured to suit your project.

TABLE OF CONTENTS

GENERAL	2	Insulation	7
FEATURES & BENEFITS	3	Electrical And Control System	8
Compliances	3	System Protections	10
Computer Performance Ratings	3	Options & Accessories	11
Compressor	3	PRODUCT SPECIFICATIONS	13
Impeller	3	CHILLER DIMENSIONS	14
Evaporator And Condenser	3	APPLICATION DATA	14
Sub-Cooler	3	Location	14
Capacity Control & Anti-Surge	4	Operating Limits	14
Environmental Friendly Refrigerant	4	Sound And Vibration	14
Factory Testing	4	Water Quality	14
Intelligent Control System	4	Evaporator Fluid Circuit	15
CHILLER COMPONENTS	4	Condenser Fluid Circuit	15
WORKING PRINCIPLE AND STRUCTURE	5	Vent And Drain Connections	15
Refrigeration Cycle	5	Refrigerant Safety Valve / Pressure Relief Valve (PRV)	15
Variable Frequency Operation	6	GUIDE SPECIFICATIONS	16
IEEE Standard 519	6	Scope	17
Oil Lubrication And Cooling System	6	Execution	22
Motor Refrigerant-Cooled System	7		

NOMENCLATURE

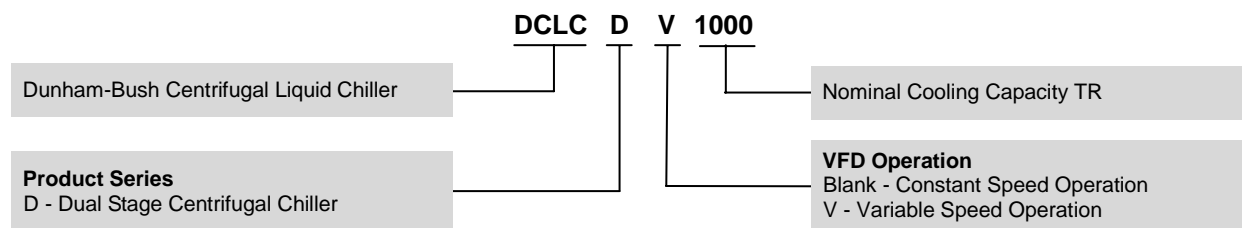

FEATURES & BENEFITS

COMPLIANCES

- ✦ Unit design to meets/ exceeds AHSRAE 90.1 requirements
- ✦ Performance are certified in accordance with AHRI Standard 550/590
- ✦ Refrigerant safety of DCLCD series is designed in accordance with ASHRAE Standard 15

COMPUTER PERFORMANCE RATINGS

The vast number of combinations of heat exchangers, compressors and motors make it impractical to publish tabular ratings for each combination. A chiller may be custom matched to certain building requirements by your Dunham-Bush Sales Representatives utilizing the Computer Selection Program. Data which can be provided to you will include:

- ✦ Chiller Capacity
- ✦ kW Input
- ✦ Evaporator and Condenser Fluid Temperature
- ✦ Evaporator and Condenser Pressure Drop
- ✦ Evaporator and Condenser Tube Water Velocities
- ✦ Electrical Data
- ✦ Part-Load Performance

Contact our local Dunham-Bush Sales Representative to discuss what Custom Solutions Dunham-Bush can offer to solve your chiller selection questions.


COMPRESSOR

- ✦ Semi-hermetic compressor for reliable operation; compressor and motor are direct gear driven. Shaft alignment, refrigerant and oil leaking at shaft seals are not applicable with this design
- ✦ Refrigerant cooled motor is hermetically sealed in compressor; motor heat generated is concealed in refrigerant system; no motor heat is rejected into chiller plantroom
- ✦ Motor shaft is supported with Babbitt bearings to reduce friction losses. High speed impeller shaft is supported by thrust bearings for reliable and efficient operation
- ✦ Built-in emergency oil reservoir to ensure continuous oil supply for compressor safe operation at coast-down period in the event of power interruption
- ✦ Built-in oil pump (gear type) reduces leaking possibility, improve operation reliability
- ✦ Built-in oil heater to maintain the oil at 100~120°F [40~50°C] even when the compressor is shut down. This prevents oil dilution, which may causes a decrease in viscosity and hence change lubrication properties

IMPELLER

- ✦ The impeller is precision cast from special super high density aluminum alloy cast using the Integer

mold technique, resulting in light weight and high anti-corrosion ability

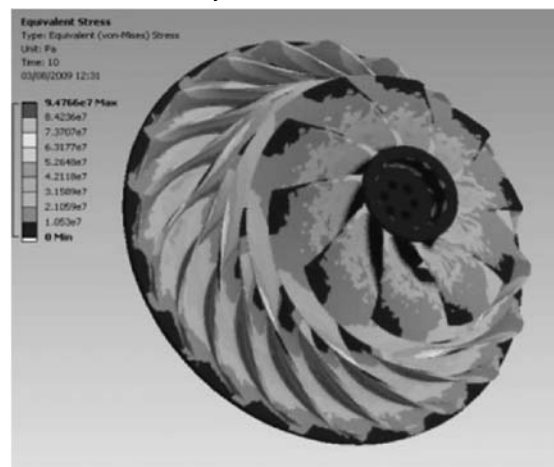

- ✦ Each impeller has succeeded in stringent balancing test and over-speed test up to 125% of rated value; to ensure stable and reliability operation
- ✦ Impellers design are aerodynamically contoured with CFD software to improve compressor full load and part load operating efficiency. Compressor efficiency is improved by 5~7%, with improve sound level, as well as anti-surge capability

EVAPORATOR AND CONDENSER

- ✦ The vessels are designed in accordance with ASME Boiler and Pressure Vessel Code
- ✦ Refrigerant side design pressure of 200PSIG [13.8BAR]; water side design pressure of 150PSIG [10.3BAR]
- ✦ Pressure test up to 220PSIG [15.2BAR] for refrigerant side; and 195PSIG [13.4BAR] for water side
- ✦ Waterboxes are fabricated using nozzle-in-head arrangement and are supplied with vent and drain connections on the dome head
- ✦ Copper tubes with enhanced profile and grooves for best heat transfer efficiency
- ✦ Intermediate tube support sheets are provided in all heat exchangers to prevent tube sagging and vibration, which could otherwise result in premature failure
- ✦ 1, 2 or 3-passes to suite the design requirements.
- ✦ Victaulic groove water connection comply with ANSI/AWWA C-606. Flanged water connection is available on request
- ✦ Condenser is designed with full pumpdown capacity

SUB-COOLER

- ✦ The sub-cooler is located in the bottom of the condenser
- ✦ It increases the overall refrigeration effect of the chiller by sub-cooling the condensed liquid refrigerant which results in a combination of increased cooling capacity and reduced compressor power consumption

FEATURES & BENEFITS

CAPACITY CONTROL & ANTI-SURGE

- ✦ Capacity control with inlet guide vane visualized precise control and energy saving operation, with enhanced anti-surge capability, permits stable operation at low load condition
- ✦ The guide vanes are connected with aircraft- quality cable and controlled by a precise electronic actuator
- ✦ Models with VFD (Variable Frequency Drive) gains further energy saving with VFD unloading during partial load operation

ENVIRONMENTAL FRIENDLY REFRIGERANT

- ✦ Use environmental friendly HFC-134a refrigerant, with **ZERO** ODP (Ozone Depletion Potential)
- ✦ Non-toxide refrigerant with no phasing out date set by Montreal Protocol
- ✦ Positive pressure operations eliminates need of purging system, which cause additional energy to unit operation

FACTORY TESTING


- ✦ The chillers are thoroughly run tested at the factory prior to shipment
- ✦ This ensured proper operation of all components in the system, including compression, power transmission, vibration & sound, oil lubrication system, and electrical & control system

INTELLIGENT CONTROL SYSTEM

- ✦ The chillers are equipped with **DB DIRECTOR** control system. The state-of-art controller which specifically designed to operate DCLCD at optimum efficiency with proactive control logics
- ✦ 10 inch touch screen color display panel is furnished for user friendly operation

CHILLER COMPONENTS

DCLCD Series (Dual Stage Centrifugal Chillers)

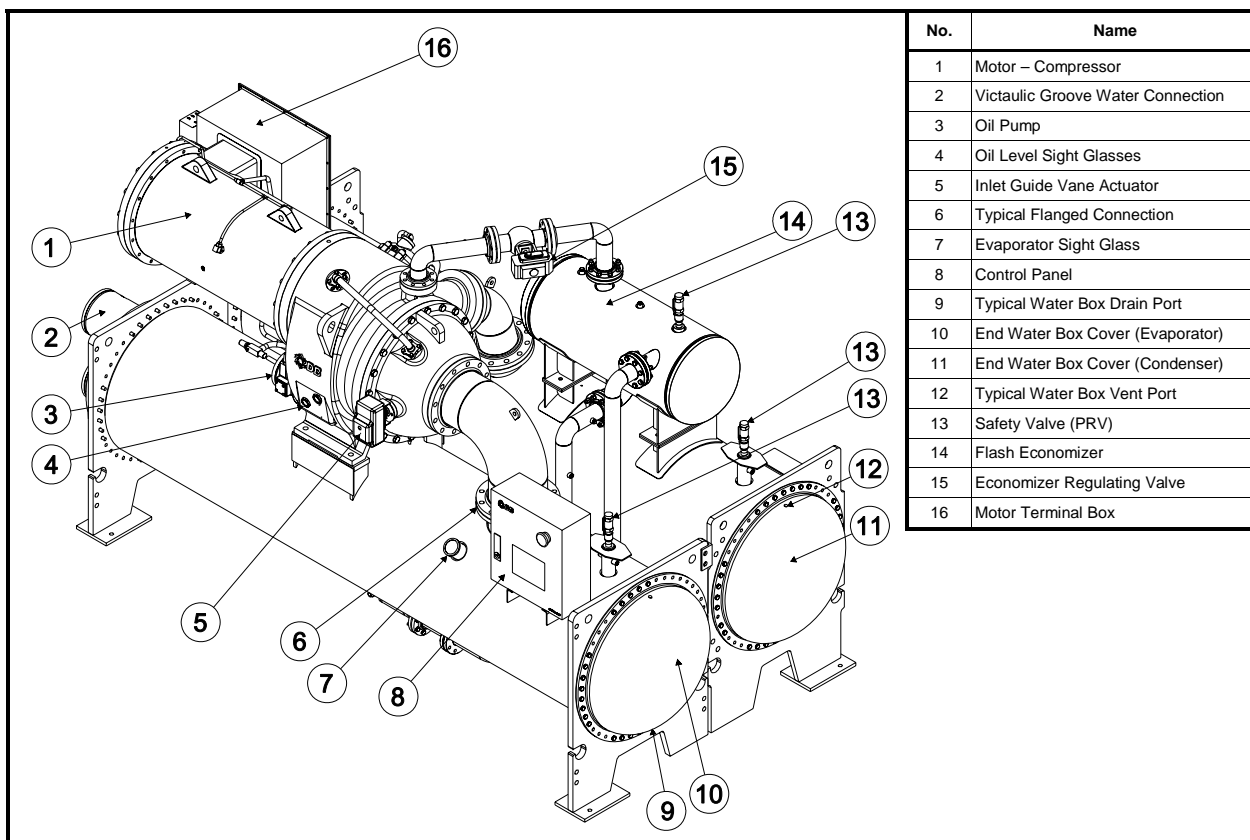

WORKING PRINCIPLE AND STRUCTURE

REFRIGERATION CYCLE

The compressor on a centrifugal chiller utilizes the Vapour Compression cycle in much the same way as any positive displacement compressor. The Vapour compression cycle uses a medium such as refrigerant to absorb heat at one part of the cycle and reject that heat at a different part of the cycle. The centrifugal compressor is a dynamic machine which raises the pressure and temperature of the circulating refrigerant by imparting velocity or dynamic energy through an electric motor driven impeller discharging into a volute to convert this velocity energy to pressure energy. As with all vapour compression systems, there are four major components: compressor, condenser, expansion device and evaporator. The evaporator absorbs heat from its surrounding and the condenser rejects the heat collected plus any system losses to its surroundings. The cycle will continue to operate all the time the compressor is operating and a system load exists.

The following is the principle in details:

Compressor:

The refrigerant vapour enters the compressor in a low pressure, low temperature but superheated state. The compression process increases the pressure and the temperature and the now high pressure, high temperature superheated gas is discharged into a condenser, a heat exchanger where due to its high temperature the refrigerant can be condensed using cooling tower water or ambient air.

Condenser:

The high pressure hot vapour is condensed into a high pressure hot liquid, or saturated liquid at its pressure corresponds to its condensing temperature. This high pressure liquid refrigerant discharges from the bottom of the condenser and is passed through an expansion valve or some other restrictive device.

Expansion device:

The downstream side of this expansion device is exposed to the low pressure part of the system which causes the refrigerant to expand rapidly as it passes through the device, as it expands; adiabatic cooling of the gas/liquid mixture occurs at this point where it then becomes colder than the water (or other liquid to be cooled) in the evaporator.

Evaporator:



This is a second heat exchanger where the medium (water) ultimately to be cooled by this process, the 'chilled water', is circulated on one side and the cold refrigerant mixture is circulated through the other side where it absorbs heat, thereby cooling down the chilled water. Cooling the chilled water is the fundamental purpose of the equipment. The refrigerant then continues to circulate in the system and after going through the compression process again the heat absorbed will be rejected by the condenser to the tower water or ambient air.

The cooling capacity of the system is directly proportional to refrigerant gas flow through the compressor. An adjustable guide vane regulating device can be installed at the inlet of centrifugal compressors to control the suction flow of compressor, matching the system cooling capacity to that of the building cooling load in a regulated and step less manner across a defined range.

Dual stage impellers with economizer:

Liquid refrigerant from condenser flows through first throttling device and then flow into the economizer instead of flowing directly to the evaporator. Vapor refrigerant is separated from liquid refrigerant in the economizer. Flash vapor refrigerant exits economizer, flows and enters compressor at second stage of the compression; while remaining liquid refrigerant is further subcooled, flows through second throttling device and then flows in to evaporator. Two benefits as below are visualized by refrigeration effect with dual stage compression, which contribute to the energy saving operation of DCLCD chillers.

- Power saving operation as flash vapor refrigerant need to pass through only half of the compression cycle to reach the condenser pressure
- Further subcooled liquid refrigerant able to absorb more heat in the evaporator which benefits the cooling cycle

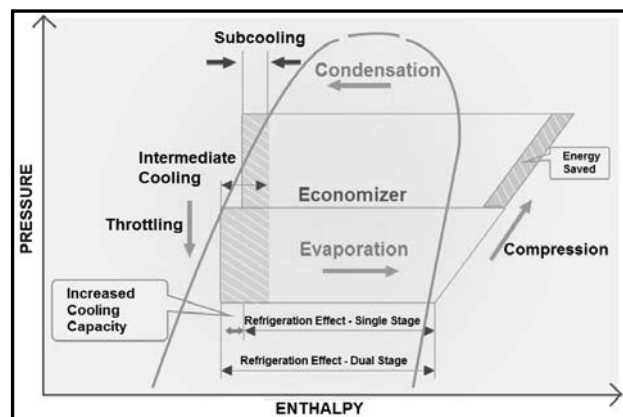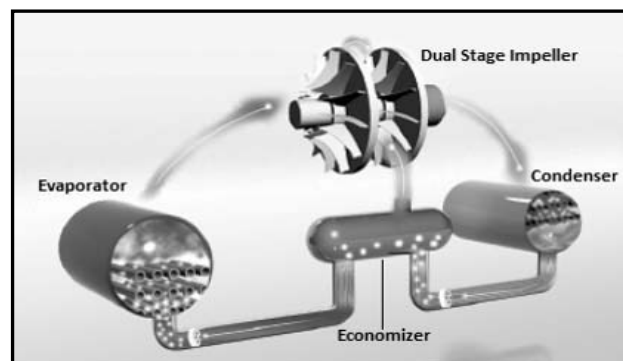

Besides energy saving operations, DCLCD also visualized stable operation in high lift conditions, as well as better resistance to surging.

WORKING PRINCIPLE AND STRUCTURE


VARIABLE FREQUENCY OPERATION (DCLCDV Series)

With increasing demand on high efficiency chillers and energy saving operation, Variable Frequency Drive (VFD) is coupled with centrifugal compressor to extend potential of energy saving in the chiller operation. DCLCDV chillers are equipped with inverter duty compressor motor, and remote mounted floor standing VFD panel.

DCLCDV chillers with variable speed operation visualized outstanding part load efficiency, thanks to capability to unload chiller capacity by reducing the motor speed. During partial load operation with reduced compressor lift, VFD slows down compressor motor speed to reduce impeller tip speed, to retain just sufficient tip speed to meet the discharge pressure requirement. This generates great energy saving as compared to capacity unloading by inlet guide vane of the compressor.

In actual operations where the compressor lift reduction is not substantial, unit capacity control is done by combination actions of VFD and inlet guide vane. VFD will slow down the motor speed as much as possible to retain sufficient tip speed, while inlet guide vane will do the remaining capacity reduction. This advanced control provides optimized performance with stable operation under all operating conditions.

Below graph shows typical performance comparison of DCLCD chiller versus DCLCDV chiller, and illustrate the potential savings with variable speed operation at AHRI part load operating conditions.

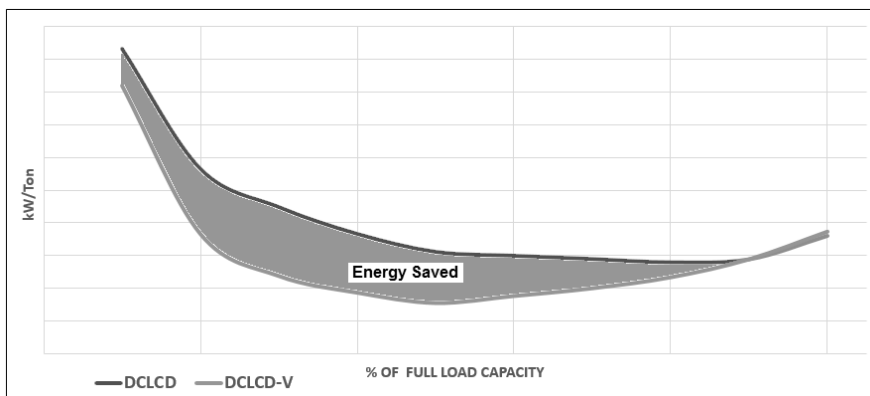

Besides benefits on energy saving as described above, VFD chillers enjoy below benefits too:-

- No inrush current – Starting current of the compressor motor is **MUCH LESS THAN** motor FLA (Full Load Amps)
- High power factor – Capability to achieve ≥ 0.95 power factor at entire load range with optional low harmonic drive

With the above features, sizing and selection of transformers, generators, and switchgears can be optimized. Capacitor bank for displacement power factor correction can be omitted.

IEEE STANDARD 519

IEEE Standard 519 – “IEEE Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems” recommends harmonic distortion limits for power utilities, as well as the customer. IEEE 519 recommends limits on Total Demand Distortion (TDD) at the Point of Common Coupling (PCC).

TDD, Total Demand Distortion is defined as “harmonic current distortion in % of maximum demand load current”.

While PCC, Point of Common Coupling is defined as the point where the building mains is connected to the public power grid.

Thus, IEEE 519 does not specify requirements for internal electrical loads, or any points in the building facility. To comply with the TDD limits as stated in IEEE 519, a power-distribution system analysis on the building’s electrical system design shall be conducted to determine degree of harmonics attenuation required.

OIL LUBRICATION AND COOLING SYSTEM

The compressor motor assembly is internally lubricated by an oil system driven by a motor independent to that of the main compressor. The system delivers filtered oil to the compressor and motor bearings at the required temperature and pressure; the drive gears operate in a controlled lubricant mist atmosphere that efficiently cools and lubricates them.

The temperature of the lubricating oil is maintained between 95 to 130°F [35 to 55°C], by passing it through a refrigerant cooled plate heat exchanger mounted on the compressor. Refrigerant cooled oil cooler benefits the owner by eliminating the requirement for field water piping and the associated installation expenses.

To minimize the quantity of lubricating oil entering and


mixing with the refrigerant, comb (labyrinth) seals are installed at inner side of motor bearings at both ends.

Lubricant from the pump is supplied to the compressor through 10 micron oil filter(s) internal to the compressor. An external oil filter is also supplied. The external oil filter is replaceable oil filter which contained in a flanged housing providing easy and convenient access for normal inspection and maintenance of the filter

The control system will not allow the compressor to start until proper oil pressure, 18~25PSID (1.24~1.72BAR), and the proper temperature is established. It also ensures the oil pump to operate after compressor shutdown to provide lubrication during coast-down.

WORKING PRINCIPLE AND STRUCTURE

MOTOR REFRIGERANT-COOLED SYSTEM

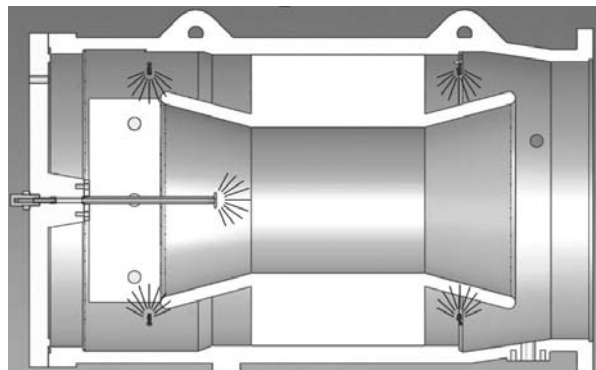

The DCLCD compressor motor is cooled by an efficient refrigerant spray cooling system. Refrigerant spray cooling method is more efficient than other methods.

The motor and the lubricating oil are cooled by liquid refrigerant taken from the bottom of the condenser vessel. Flow of refrigerant is maintained by the pressure difference during compressor operation. After the refrigerant passes through a control valve and filter, it is distributed by the motor cooling system.

The refrigerant flows through an orifice into the motor housing. Once past the orifice, the refrigerant is directed over the motor by a spray nozzle. The refrigerant collects in the bottom of the motor casing

and is then drained back to the evaporator through the motor refrigerant drain line.

The motor is protected by the temperature sensors imbedded in the stator windings. If the temperature rises above the safety limit 230°F [110°C], the compressor will shut down automatically.

INSULATION


Factory insulation on DCLCD chillers with 1 inch [25mm] closed cell insulation are standard supply. The factory insulation for the DCLCD includes the following areas:

- ✿ The evaporator shell and tube sheets
- ✿ Suction line up to the compressor suction housing
- ✿ Compressor motor and motor cooling return lines
- ✿ Several small oil cooling and oil return system lines, the liquid line
- ✿ Economizer

For unit installation at high humidity job site may require **Double Thick Insulation** option to prevent possibility of condensation.

Note: In the case that factory insulation is excluded and unit insulation to be carry out at job site. Thermal insulation shall be fitted in a way that will not interfere with the normal operation of the unit and that will also allow removal of the water boxes to enable cleaning of the heat exchanger tubes. Access to fasteners and nameplate shall be maintained at all times.

Typical Insulated Area By Factory Insulation

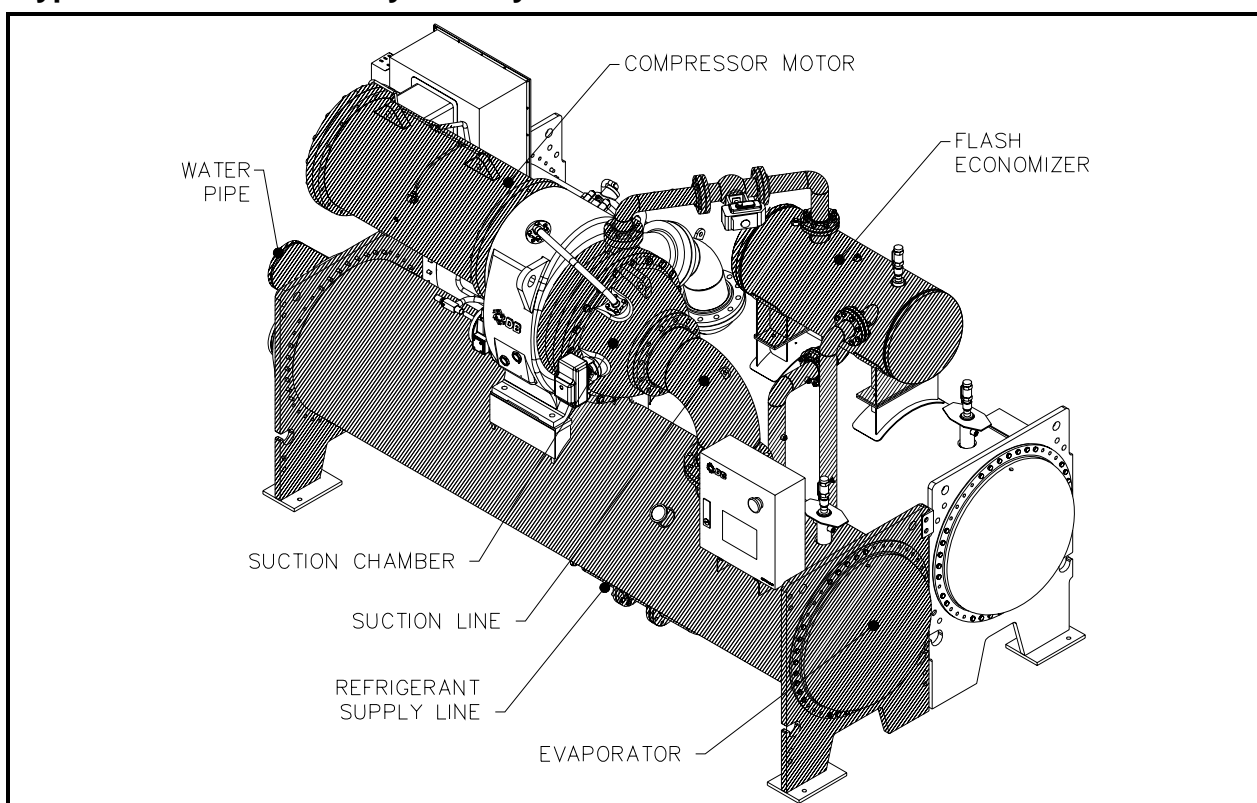

WORKING PRINCIPLE AND STRUCTURE

ELECTRICAL AND CONTROL SYSTEM

Main Power Supply Voltage and Starter Cabinet

Various main power supply voltages for compressor motor are available in all DCLCD series, as below.

Low Voltage (LV)

50Hz – 380V; 400V; 415V

60Hz – 200V; 230V; 380V; 400V; 460V; 575V

Medium Voltage (MV)

50Hz – 3000V; 3300V; 6000V; 6600V; 10000V; 11000V

60Hz – Consult factory

Optional floor Standing NEMA 1 starter cabinet can be supplied and shipped loose for site installation.

Refer to [Options and Accessories](#) for various type of starter cabinet offered by DB.

Control Power Supply and Unit Electrical Enclosure

The DCLCD unit electrical panel is designed to contain oil pump starter together with the control system in single enclosure for the ease of installation. The enclosure is NEMA 1 rated for indoor installation.

Design with single power termination point (3-phase power supply) to provide power supply for oil pump, oil heater(s) and controls. Step down transformer is built-in to step down the main voltage to the required control voltage.

Power consumption of oil heater and oil pump are as below.

Item	Input Power kW
Oil Heater	1.0
Oil Pump	1.5

The 3-phase power supply to the control panel can be any of below.

Frequency of Power Supply	Voltage of Power Supply
50Hz	380V; 400V; 415V
60Hz	208V; 230V; 380V; 400V; 460V; 575V

DB Director Control System

DCLCD series adopt the state of art **DB DIRECTOR** DDC (Direct Digital Control) control system which is proven for its reliability. 'Smart logic' control theory is used in the DDC control system, through measurement of key parameters and the rate at which they change, the control system will anticipate operation trend and ensure the accurate stable and optimal control of the chiller.



DB DIRECTOR in the DCLCD chiller is complete with RS485 communications port and all hardware and software necessary to remotely monitor and control the packaged chiller up to 1500m away (hard wired).

This valuable enhancement to the chiller system allows the ultimate in serviceability. **DB DIRECTOR** as standard is additionally equipped with history files which may be used to take logs which would be retrievable. This feature provides owners of multiple buildings with a simple and inexpensive method of investigating potential problems quickly and in a highly effective manner.

DB DIRECTOR is equipped with RS485 and Ethernet communication ports as standard. This user friendly design allows Building Management System (BMS) to interface directly with the chiller via either of Modbus RTU, Modbus IP, or BACnet IP communication protocol. LONworks or BACnet MSTP communication protocol can be established with installation of external adapter

DB DIRECTOR is equipped with 10 inch Touch Screen Color Display Panel as the user interface. This user friendly graphical interface providing following:

- ✿ Adjustment of chiller operation set point
- ✿ Real time inspection and supervising of chiller operation status
- ✿ Real time failure inspection
- ✿ Historical operation data storage

The screen displays parameters of chiller operation and to achieve constant monitoring. The start-stop and automatic control procedures can be adjusted, user can access the unit status and reliable start, stop, adjustable operation automatically through simply click on the button.

In addition, user can switch automatic and manual control mode easily. System has protection and malfunction used to ensure safe chiller operation, and it can retain record of up to 99 items of failure parameters for investigation. If the unit operation failed, the control system can carry out an initial diagnosis, indicating the possible cause of the malfunction automatically.

DB DIRECTOR on each DB centrifugal system is factory mounted, wired, and tested to ensure unit protection and efficient capacity control. In addition, the program logic ensures proper starting, stopping, and anti-recycling of the chiller.

WORKING PRINCIPLE AND STRUCTURE

Below readouts are available on the display panel.


- ✿ Leaving chilled water temperature
- ✿ Evaporator and condenser saturation pressure
- ✿ In/out chilled water temperature
- ✿ In/out cooling water temperature
- ✿ Evaporation saturation pressure
- ✿ Condensation saturation pressure
- ✿ Percentage of the full load Amps
- ✿ Guide vane open degree
- ✿ Water temperature set value
- ✿ Oil sump temperature
- ✿ Oil sump pressure
- ✿ Oil pressure difference
- ✿ Total chiller running time
- ✿ Elapsed compressor run time

- ✿ Motor status
- ✿ Oil pump status
- ✿ Oil heater status
- ✿ Pressure difference flow device status
- ✿ Temp/pressure sensor status
- ✿ External stop/start command status


Below are user accessible setpoints available on the display panel.

- ✿ Leaving chilled water temperature setpoint
- ✿ Leaving chilled water temperature control band
- ✿ Weekly operating schedule
- ✿ Chilled water temperature reset
- ✿ Demand limiting

The Unit Operating Parameters

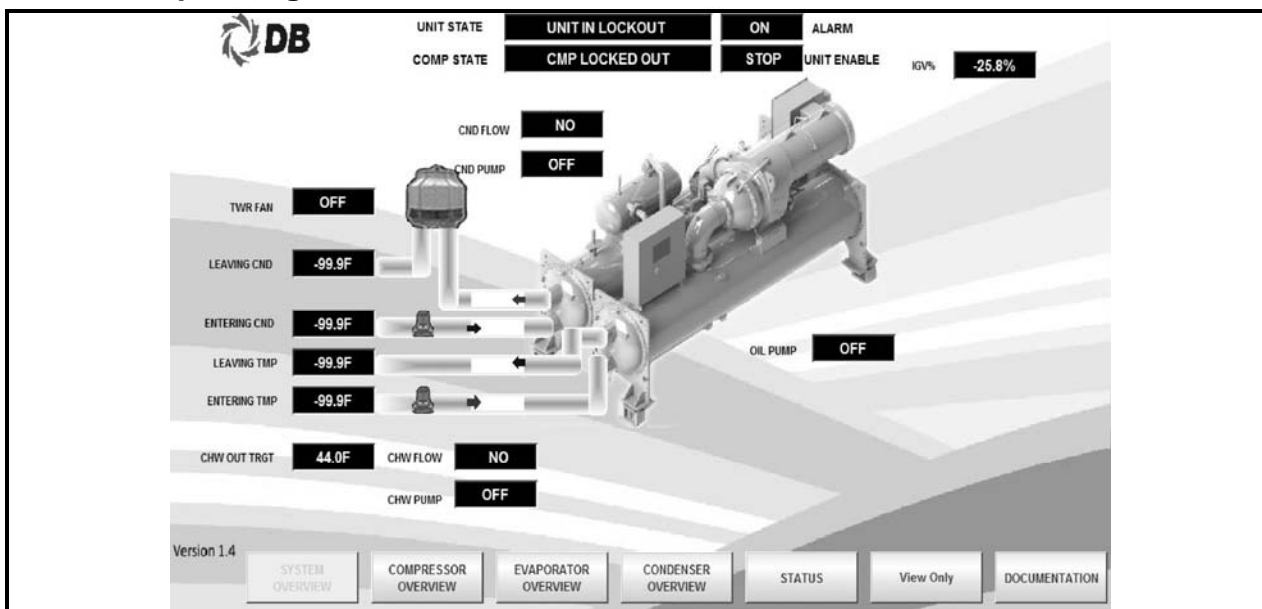


The Compressor Operating Parameters

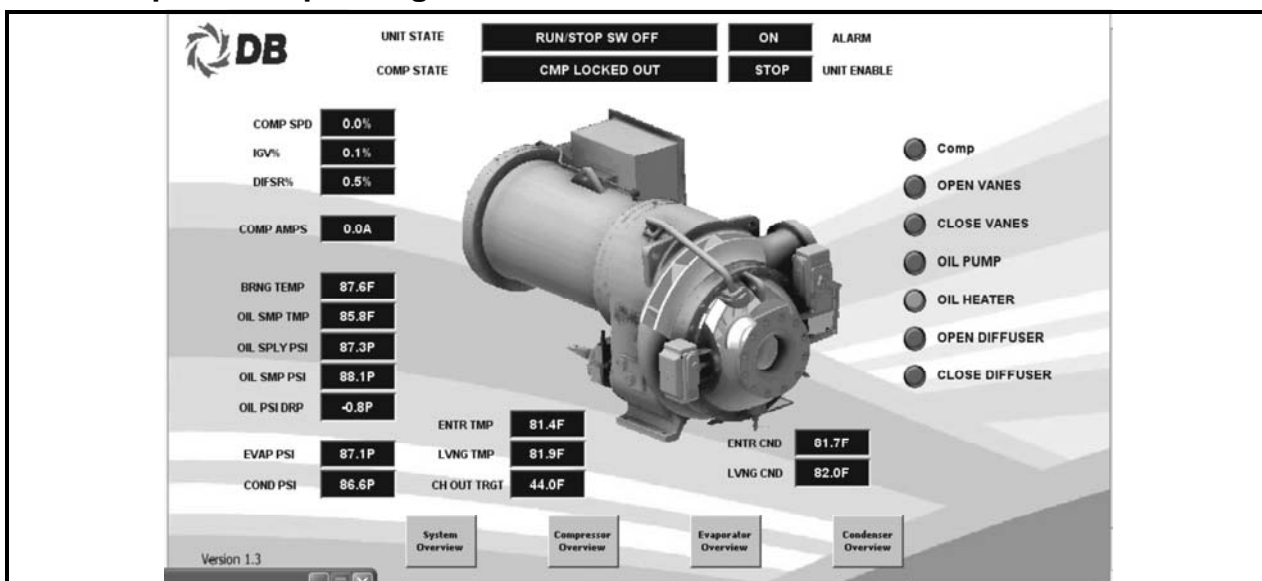


WORKING PRINCIPLE AND STRUCTURE

The Condenser Operating Parameters

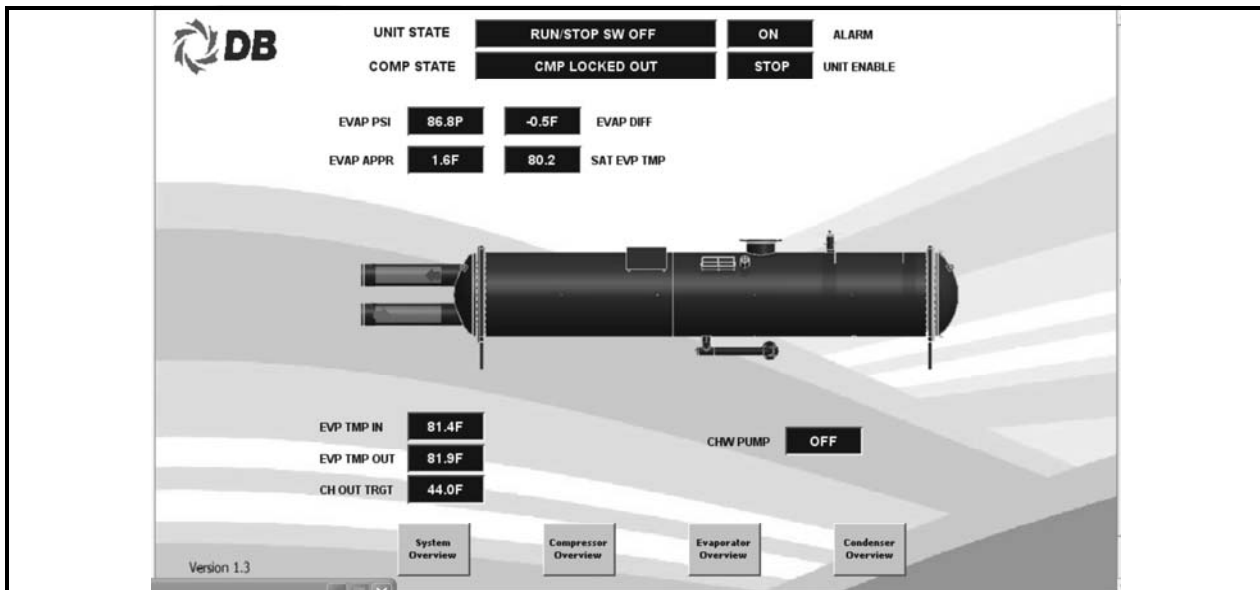

The Evaporator Operating Parameters

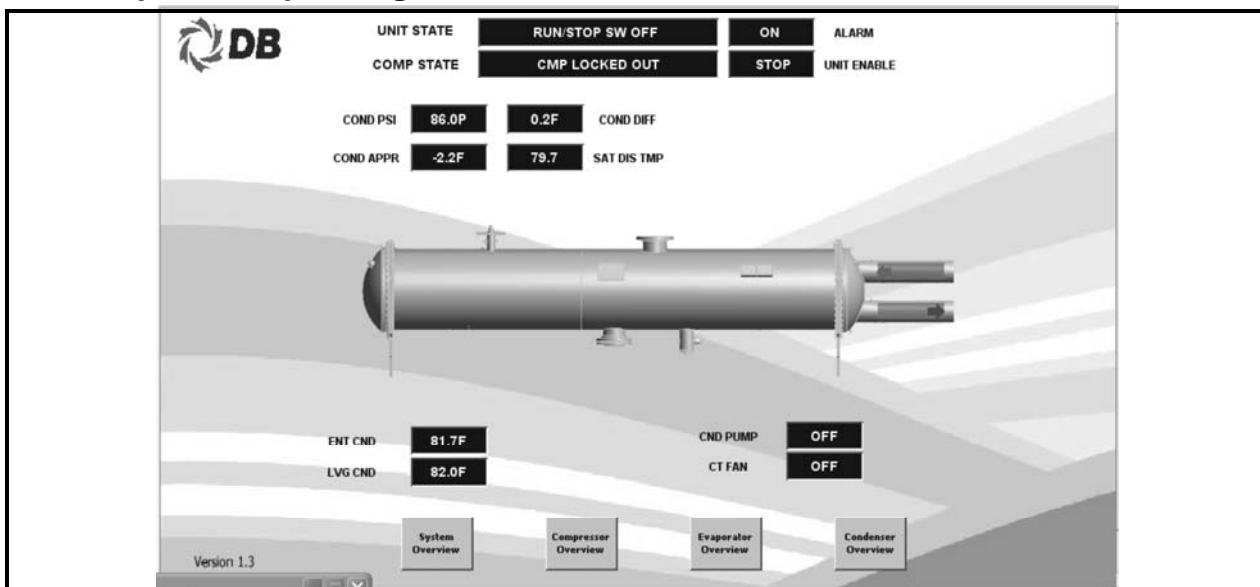

SYSTEM PROTECTIONS

The chiller controller uses proportional integral-derivative (PID) control for all limits. This removes oscillation above and below setpoints and extends the capabilities of the chiller.

Some of the standard protection features of the chiller controller are described in this section. There are additional protection features not listed here.

High Condenser-Pressure Protection: The condenser limit controller keeps the condenser pressure under a specified maximum pressure. The chiller runs all the way up to 100 percent of the setpoint before reducing capacity using its adaptive control mode.

Starter Failure Protection: The chiller will protect itself from a starter failure that prevents the compressor motor from disconnecting from the line, to the limits of its capabilities. The controller starts and stops the chiller through the starter. If the starter malfunctions and does not disconnect the compressor motor from the line when requested, the controller will recognize the fault and attempt to protect the chiller by operating the evaporator-and condenser-water pumps and attempting to unload the compressor.

Loss of Water-Flow Protection: DCLCD control system has an input that will accept a contact closure from a proof-of-flow device. These are the pressure differential switch and the flow switch for alternative. Customer wiring diagrams also suggest that the flow

WORKING PRINCIPLE AND STRUCTURE

switch be wired in series with the cooling-water (condenser-water) pump starter's auxiliary contacts. When this input does not prove flow within a fixed time during the transition from Stop to Auto modes of the chiller, or if the flow is lost while the chiller is in the Auto mode of operation, the chiller will be prohibited from running by a non-latching diagnostic.

Anti-freezing Protection: Low evaporator-water temperature protection, also known as Anti-freezing protection, avoids water freezing in the evaporator by immediately shutting down the chiller and attempting to operate the chilled-water pump. This protection prevents freezing in the event of extreme errors in the evaporator- refrigerant temperature sensor.

The cutout setting should be based on the percentage of antifreeze used in the customer's water loop. The chiller's operation and maintenance documentation provides the necessary information for percent antifreeze and suggests leaving-water temperature cutout settings for a given chilled-water temperature set point.

Oil-Temperature Protection: Low oil temperature when the oil pump and/or compressor are running may be an indication of refrigerant diluting the oil. If the oil temperature is at or below the low oil-temperature set point, the compressor is shut down on a latching diagnostic and cannot be started. The diagnostic is reported at the user interface. The oil heater is energized in an attempt to raise the oil temperature above the low oil-temperature set point. High oil-temperature protection is used to avoid overheating the oil and the bearings.

Low Differential Oil-Pressure Protection: Oil pressure is indicative of oil flow and active oil-pump operation. A significant drop in oil pressure indicates a failure of the oil pump, oil leakage, or other blockage in the oil-circuit. During oil pump and compressor prelude mode the differential pressure should not fall below 20PSID [1.4BAR]. A shutdown diagnostic will occur within 3 seconds of the differential pressure falling below 2/3 of the low differential oil pressure cutout. When the compressor is running the shutdown diagnostic will occur when the differential pressure falls below the differential oil pressure cutout for more than (cutout x 3) seconds. This allows for a relatively high cutout to be violated longer before triggering shutdown, as compared to a low cutout.

Current Overload Protection: The control panel will monitor the current drawn by each line of the motor and shut the chiller off when the highest of the three line currents exceeds the trip curve. A manual reset diagnostic describing the failure will be displayed. The current overload protection does not prohibit the chiller from reaching its full load amperage. The chiller protects itself from damage due to current overload during starting and running modes, but is allowed to reach full-load amps.

High Motor-Winding Temperature Protection: This function monitors the motor temperature and terminates chiller operation when the temperature is excessive. The controller monitors each of the three winding-temperature sensors any time the controller is

powered up. Immediately prior to start, and while running, the controller will generate a latching diagnostic if the winding temperature exceeds 110°C.

There are some other system protection controls which will automatically act to insure system reliability:-

- ⊗ High gear temperature
- ⊗ Sensor error
- ⊗ Anti-recycle
- ⊗ Oil pump overload
- ⊗ [Optional] Oil pump starter failure
- ⊗ Low pressure difference of oil
- ⊗ Power loss

DB DIRECTOR retains the latest 99 alarm conditions complete with time of failure in its alarm history. This tool aids service technicians in troubleshooting tasks enabling downtime and nuisance trip-outs to be minimized.

Chilled water pump, condenser water pump and cooling tower can be control by the chiller controller. **DB DIRECTOR** gives start/stop command to these equipment through the volt-free contacts to work as a standalone system. For best energy saving and optimized chiller system operation, **DB-CPM** (Chiller Plant Manager) is the recommended solution. Refer **Options & Accessories** for detail explanations.

OPTIONS & ACCESSORIES

Starter Panel

The factory supplied main motor starter panel are rated with NEMA-1 protection and includes below:

- ⊗ Main incoming power terminal for wires termination
- ⊗ Circuit breaker for the compressor
- ⊗ Compressor motor over current protection module
- ⊗ Compressor motor overheat protection module
- ⊗ Main power supply monitoring module to give protection on:
 - Under or over voltage
 - Phase reversal
 - Phase loss
 - Phase imbalance
- ⊗ (Optional) Ground fault interrupter

Direct-On-Line (DOL) Starter – DOL starter is full voltage starter with simplest design and lowest cost. Full starting torque is applied to motor during start-up, thus, starting current is equivalent to motor LRA (lock rotor amps), in another words, about 7 times of rated full load current (FLA). DOL starter is recommended for MV applications only and subject to local rules, regulation and authorities' approval.

Star-Delta Starter – Star-Delta starter is a reduced voltage starter where the starting voltage is reduced to 1/3 of full voltage start. Thus, starting torque applied to the motor is 1/3 of full voltage starting torque, resulting 2/3 decrement in starting current as compared to DOL starter. Generally the starting current is about 2~2.5 times of rated FLA. Star-Delta starter with just 1/3 of full load torque is good enough to start the centrifugal compressor as centrifugal compressor is always started at "No Load" condition with inlet guide vane fully closed.

WORKING PRINCIPLE AND STRUCTURE

Softstarter (Solid State Starter) – Softstarter, or solid state starter is an electronic controlled starter with controllable starting characteristic. Softstarter uses SCRs (silicon Controlled Rectifier) to control current flow to the motor during start-up, thus, the motor starting current can be controlled. Maximum starting current by softstarter can be preset, and usually is about 3~3.5 times of rated FLA. SCRs or softstarter will be bypass after motor has reached rated motor rpm to minimize heat loss generated by softstarter, as well as to extend the life span of the softstarter.

The softstarter panel for models DCLCD1200 and below is a unit mounted type.

The softstarter panel for models DCLCD1300 and above is a floor standing type.

VFD (Variable Frequency Drive) – VFD is motor controller which appear to be best motor starter for now. Besides enjoying no inrush motor startup by VFD starter, part load performance of DCLCD chillers can be further improved, as describe in Section **Variable Speed Operation**.

VFD utilize IGBT (Insulated-Gate Bipolar Transistor) technology to generate PWM (Pulse Width Modulating) signal to control the motor speed. Thus, motor starting torque can be applied precisely without over-stress the motor. Therefore, integration of VFD to DCLCD chillers not only benefits the chiller operation, it also helps on power grid and generator as it eliminates current surging during motor startup.

The VFD starter panel for models DCLCD1200 and below is a unit mounted (models DCLCD850 to DCLCD1200 may required to be shipped loose during delivery) please refer to the GA drawing.

The VFD starter panel for models DCLCD1300 and above is a floor standing type.

Harmonic filter option – Harmonic distortion occurs when there is VFD in the electrical distribution system. Harmonic distortion level can be treated at PCC (Point of Common Coupling) as specify by IEEE Standard 519. However, DB can provide option to include additional harmonic filter to lower the total harmonic distortion level. Harmonic filter with 5% total harmonic distortion is available on customer request to suite the applications.

Refrigerant Isolation Valves

Isolation valves are installed at refrigerant liquid line and compressor discharge line to isolate the condenser for refrigerant storage during servicing. This saves precious time on servicing as it eliminates the needs to transfer refrigerant into external refrigerant storage vessels.

1-pass Evaporator and Condenser

1-pass evaporator or condenser is suitable for applications with low temperature different (delta T) or high fluid flow, where the evaporators or condensers are piped in series.

3-pass Evaporator and Condenser

3-pass evaporator or condenser is suitable for applications with high delta T and low fluid flow.

Flange Water Connection

Flanged water connection for evaporator and condenser water connections in lieu of standard Victaulic groove connection.

Hot Gas Bypass

To maintain unit operation below minimum unloaded capacity.

Marine Water Box

Marine water box for condenser, for ease of condenser tube cleaning without interfere with field water piping.

300psig Evaporator & Condenser

Evaporator and condenser with 300psig working pressure at water side is available to suite site installation.

Double Thick Insulation

Evaporator with double thick 2 inch [50mm] closed cell insulation, for extra resistance to condensation.

Vibration Isolator

Spring isolators with 1 inch [25mm] deflection is supplied for field installation. These housed spring assemblies have a neoprene friction pad at the bottom to prevent the passage of noise, and a spring locking levering bolt at the top. Neoprene inserts prevent contact between the steel upper and lower housings.

ASME / PED Stamp

Evaporator and condenser with ASME / PED Stamp, are available on request.

DB-CPM (Chiller Plant Manager)

DB Chiller Plant Manager (**CPM**) is a trustworthy and headache-free solution for building owners and users on chiller plant control and automation system. **CPM**'s advanced controllers monitor and control equipment in chiller plant such as chillers, primary and secondary chilled water pumps, condenser water pumps, cooling towers, Variable Frequency Drives (VFD), motorized valves, bypass modulating valves, and etc. Field devices such as flow meters, BTU meters, digital power meters, sensors & transducers can be interfaced with **CPM** via HLI or LLI. **CPM** controls chillers, pumps and cooling towers sequencing, as well as lead-lag, duty-standby and alarm changeover operations.

NetVisorPRO – Monitoring software of **CPM** system which allows system monitoring, historical trending, and alarm logging to be carry out at a PC terminal. Graphical animations on system operation, temperature and flow rate trend graphs, historical data and alarm history logs, settings changes are all available with **NetVisorPRO**.

Chiller plantroom control and automation by Dunham-Bush **DB-CPM** provides the owners with a chiller system in stable operation, optimized performance and energy efficiency.

PRODUCT SPECIFICATIONS


DCLCD Chiller Specifications (Typical)

Model	Nominal Cooling Capacity TR	Dimension						Unit Weight			
		Length (L)		Width (W)		Height (H)		Shipping Weight		Operating Weight	
		inch	mm	inch	mm	inch	mm	lbs	kg	lbs	kg
DCLCD300	300	174.7	4440	82.5	2100	102	2590	22851	10365	27886	12649
DCLCD350	350	174.7	4440	82.5	2100	102	2590	23182	10515	28431	12896
DCLCD400	400	195.2	4960	82.5	2100	102	2590	24291	11018	30075	13642
DCLCD450	450	195.2	4960	82.5	2100	102	2590	24548	11135	30450	13812
DCLCD500	500	195.2	4960	82.5	2100	102	2590	24553	11137	30455	13814
DCLCD550	550	199.4	5070	95.5	2430	115.4	2930	29355	13315	36427	16523
DCLCD600	600	199.4	5070	95.5	2430	116.9	2970	32534	14757	39919	18107
DCLCD650	650	199.4	5070	95.5	2430	116.9	2970	33830	15345	41692	18911
DCLCD700	700	201.9	5130	110.2	2800	119	3010	38797	17598	48387	21948
DCLCD750	750	174.7	4440	82.5	2100	102	2590	22851	10365	27886	12649
DCLCD800	800	174.7	4440	82.5	2100	102	2590	23182	10515	28431	12896
DCLCD850	850	195.2	4960	82.5	2100	102	2590	24291	11018	30075	13642
DCLCD900	900	195.2	4960	82.5	2100	102	2590	24548	11135	30450	13812
DCLCD950	950	195.2	4960	82.5	2100	102	2590	24553	11137	30455	13814
DCLCD1000	1000	199.4	5070	95.5	2430	115.4	2930	29355	13315	36427	16523
DCLCD1100	1100	199.4	5070	95.5	2430	116.9	2970	32534	14757	39919	18107
DCLCD1200	1200	199.4	5070	95.5	2430	116.9	2970	33830	15345	41692	18911
DCLCD1300	1300	201.9	5130	110.2	2800	119	3010	38797	17598	48387	21948
DCLCD1400	1400	201.9	5130	110.2	2800	119	3010	39238	17798	49011	22231
DCLCD1500	1500	201.9	5130	110.2	2800	119	3010	39727	18020	49842	22608
DCLCD1600	1600	209.06	5310	122.05	3100	125.39	3185	48378	21944	60045	27236
DCLCD1700	1700	209.06	5310	122.05	3100	125.39	3185	48923	22191	61088	27709
DCLCD1800	1800	209.06	5310	122.05	3100	125.39	3185	49712	22549	62322	28269
DCLCD1900	1900	209.06	5310	122.05	3100	125.39	3185	50283	22808	63383	28750
DCLCD2000	2000	209.06	5310	122.05	3100	125.39	3185	51019	23142	64461	29239
DCLCD2100	2100	217.72	5530	144.09	3660	137.6	3495	59926	27182	75674	34325
DCLCD2200	2200	217.72	5530	144.09	3660	137.6	3495	60543	27462	76767	34821
DCLCD2300	2300	217.72	5530	144.09	3660	137.6	3495	61458	27877	78141	35444
DCLCD2400	2400	217.72	5530	144.09	3660	137.6	3495	62098	28167	79256	35950
DCLCD2500	2500	217.72	5530	144.09	3660	137.6	3495	62891	28527	80522	36524
DCLCD2600	2600	219.09	5565	134.65	3420	137.32	3488	57477	26071	77071	34959
DCLCD2700	2700	219.09	5565	134.65	3420	137.32	3488	57915	26270	77768	35275
DCLCD2800	2800	219.09	5565	134.65	3420	137.32	3488	58246	26420	78407	35565
DCLCD2900	2900	219.09	5565	134.65	3420	137.32	3488	58833	26686	79296	35968
DCLCD3000	3000	219.09	5565	134.65	3420	137.32	3488	59053	26786	79909	36246

- Notes: 1. The above data are rated with following conditions:
 Chilled Water Inlet/Outlet Temperature 54/44°F [12.2/6.7°C]; Cooling Water Inlet/Outlet Temperature 85/94.3°F [29.4/34.6°C];
 Evaporator fouling factor 0.0001hr.ft².°F/Btu [0.000018 m².°C/W];
 Condenser fouling factor 0.00025 hr.ft².°F/Btu [0.0000144 m².°C/W]; 2-pass evaporator and condenser.
2. Please consult Dunham-Bush sales office for computer selection other than the above operating condition and power supply.
3. Dimensions lengths, width, height in mm is rounded to closest zero.

CHILLER DIMENSIONS

DCLCD Dimensions And Service Clearance

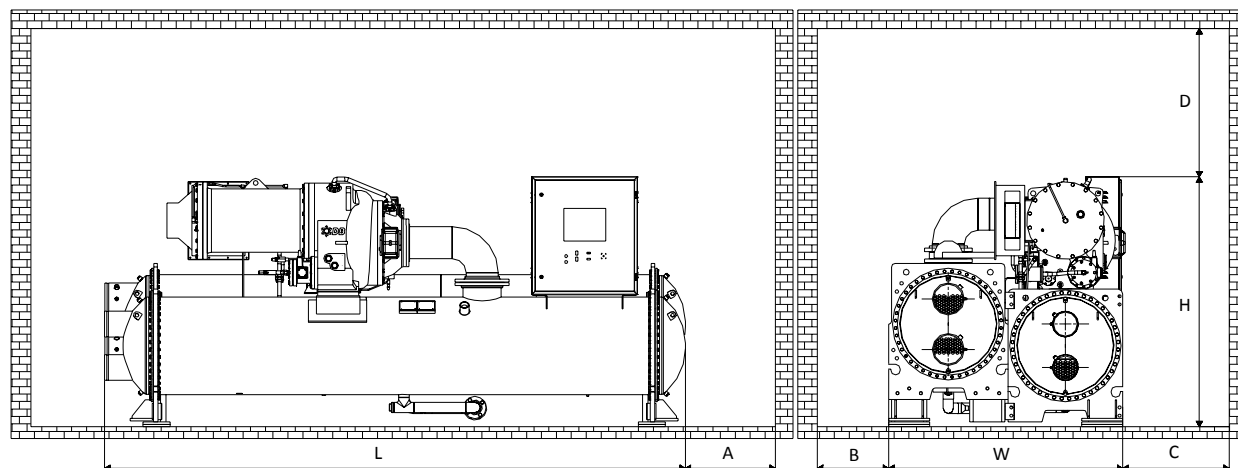

Notes:

- The above drawings show general construction of a DCLCD chiller with reference to chiller configuration published in [PRODUCT SPECIFICATIONS – DCLCD Chiller Selection Sample](#).
- Chiller dimensions (W- width, L – Length, H – Height) can refer from the same section with reference to unit dimensions as per selection sample published.
- Recommended service clearance:
Maintenance space (A) – 3400mm [134"] (DCLCD850 and below); 3800mm [150"] (DCLCD900 and above)
Maintenance space (B) – 375mm [15"]
Maintenance space (C) – 635mm [25"]
Overhead service clearance (D) – 1350mm [53"]
- The above constructions and dimensions are based on standard water side design pressure of 150PSIG [10.3BAR], with 2-pass evaporator and condenser.
- Service access should be provided in accordance with American Society of Heating, Refrigeration, and Air Conditioning Engineers (ASHRAE) 15, latest edition, National Fire Protection Association (NFPA) 70, and local safety code.
- Compressor motor starter panel is not shown in this drawing.
- Certified drawings available upon request. Drawings included in this section are for preliminary layout purposes only. Detailed certified drawings are available from the local DB sales office. Do not use these input for final construction drawings.

APPLICATION DATA

LOCATION

DCLCD chillers are design with NEMA 1 rated on chillers, control enclosure and main motor starter enclosure. This is suitable for installation in an indoor or weather protected area only. The temperature of storage area and operating plantroom shall be within below specified limits. Chiller plantroom shall have good ventilation and low humidity, maximum humidity allowed is 95%RH non-condensing.

	Minimum	Maximum
Storage and Transportation	-4°F [-20°C]	122°F [50°C]
Chiller room ambient	32°F [0°C]	104°F [40°C]

OPERATING LIMITS

The DCLCD chillers shall be operated within below temperature limits.

	Minimum	Maximum
Evaporator Inlet Water Temperature	46°F [8°C]	77°F [25°C]
Evaporator Outlet Water Temperature	39°F [4°C]	59°F [15°C]
Condenser Inlet Water Temperature	60°F [15.6°C]	93°F [34°C]
Condenser Outlet Water Temperature	71.5°F [22°C]	105.8°F [41°C]

SOUND AND VIBRATION

Sound level of the DCLCD is not published in this catalogue. However, it is available on the performance summary printout. Please contact your local DB representative for the information.

DCLCD series is designed and run tested to have maximum vibration less than 3mm/second, which is significantly better than the industry norm.

Vibration isolators such as spring isolators are offered as optional accessories to suite dedicated site installation.

WATER QUALITY

The cooling water quality is an important part of the centrifugal unit maintenance. If the quality is poor, there will be scaling, mud sediment, corrosion as well as micro-organism reproduction etc. Scale and mud heavily affects the normal operation of the unit, will decrease the heat transfer coefficient of copper tubes and refrigerating capacity and increase the energy

APPLICATION DATA

consumption. It also decreases the flowing area and increases the water resistance. The corrosion could lead to pipe perforation and water leakage in the unit possibly resulting in shut down of the unit for tube repair. Regular and reliable monitoring of the cooling water quality is recommended for the long term reliable operation of the unit. It is also advised that comprehensive consideration for water treatment is required by referring to water treatment for circulating cooling water treatment method or by consulting your local DB Sales and Service personnel.

EVAPORATOR FLUID CIRCUIT

The evaporator fluid circuit requires a minimum system fluid volume of 3 US gallons per Ton [3.3 liters/ cooling kW] for stable operation. The minimum system fluid volume may increase up to 10 US gallons per Ton [11 liters/ cooling kW] for process cooling, low load applications with small temperature range and/or vastly fluctuating load conditions.

Variable Evaporator Flow

Dunham-Bush chillers are capable for variable evaporator flow system. The chiller may operate to maintain constant leaving fluid temperature with evaporator flow rate changes, with below conditions fulfilled.

- ✦ Evaporator fluid flow rate is within minimum and maximum flow rate of the unit at all time during the operation
- ✦ Rate of flow change shall not exceed 30% per minute

The chillers are able to tolerate with transient flow change up to 50% per minute, which may happen during stage up or down chillers that are connected to common header. However, such flow rate change is prohibited other than this condition considering better system stability and temperature setpoint control.

Failure to comply with the above conditions will cause problem to the chiller operation and may cause the chiller to shutdown.


CONDENSER FLUID CIRCUIT

The unit shall work with constant condenser flow, variable condenser flow is not recommended. Variable condenser flow will keep condenser pressure high at the chiller, and thus, decreases chiller's efficiency and increase power consumption of the system. In addition, variable condenser flow increases rate of fouling of condenser, which will de-rate chiller performance and increase unit maintenance cost.

VENT AND DRAIN CONNECTIONS

Waterboxes are fabricated using the nozzle-in-head arrangement and are supplied with vent and drain connections on the dome head. Marine waterboxes are supplied with vent and drain connections on the waterbox shells.

Vents should be provided on the chilled water as high as possible in the system and drains should be located as low as possible to ensure ease of servicing and maintenance. Where shutoff valves are provided in the main water pipes near the unit, only minimal amount of system water will be lost when the heat exchangers are drained. This reduces the time required for drainage and saves on the cost of re-treating the system water.

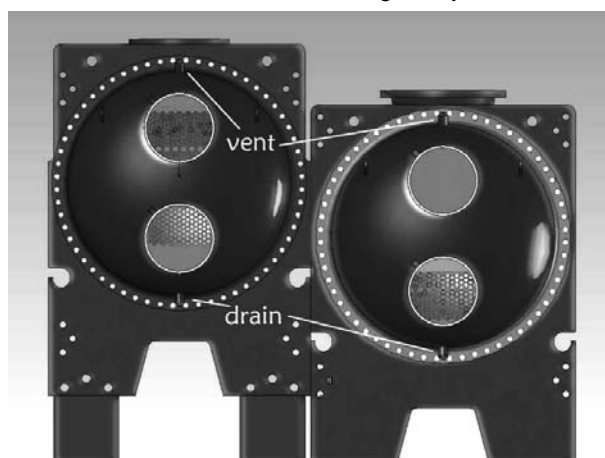

REFRIGERANT SAFETY VALVE / PRESSURE RELIEF VALVE (PRV)

Pressure relief or safety valve connection sizes are NPT1 (DN25) for the DCLCD evaporator and condenser. The relief setting is 12.8 bar.

All Safety Valves must be piped to the outside of the building in accordance with ANSI/ASHRAE Standard 15.

Two pressure relief valves mounted on a changeover valve, are used on the condenser so that one PRV can be shut off and removed for testing or replacement, leaving the other in operation. Only one of the two valves is in operation at any time. Where 4 valves are shown, on some large vessels, they consist of two PRV's mounted on each of two transfer valves.

Only two PRV's of the four are active at any time.

Vent piping is sized for only one valve of the set since only one can be in operation at a time.

Per ASHRAE Standard 15, the pipe size cannot be less than the relief device. The discharge from more than one Safety Valve can be run into a common header, the area of which shall not be less than the sum of the areas of the connected pipes.


For further details, refer to ASHRAE Standard 15. The common header can be calculated by the formula:

$$D_{Common} = \left(D_1^2 + D_2^2 \dots D_n^2 \right)^{0.5}$$

The above information is a guide only. Consult local codes and/or latest version of ASHRAE Standard 15 for sizing data.

APPLICATION DATA

The Safety Valve Locations

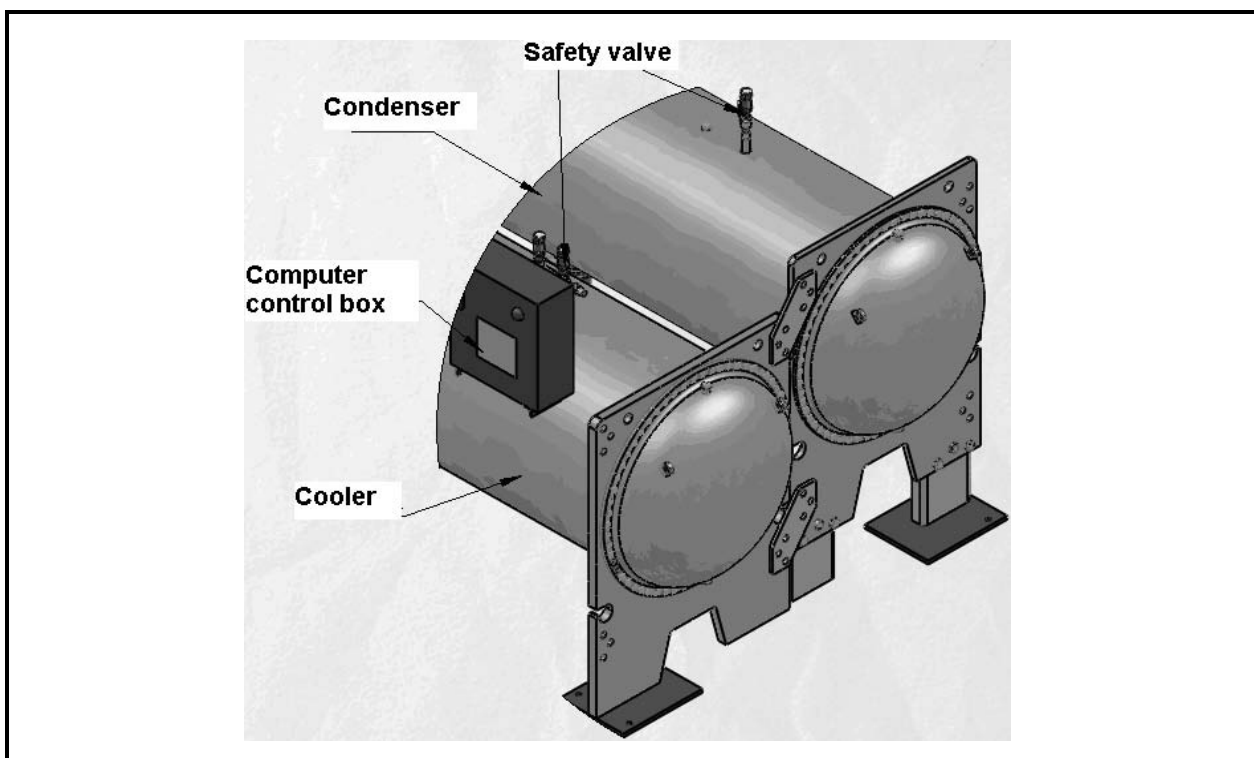

Condenser Pressure Control

Cooling tower control is increasingly becoming an overlooked subject, and it causes problems. The following is a general recommendation that is applicable to all standard packaged chillers.

Most chiller manufacturers recommend that condenser water be controlled so that its temperature never goes below 55°F [12.8°C] (even when the machine is off) and that its rate of change is not rapid. Rapid can be defined as not exceeding 2°F [1.1°C] per minute. This is necessary because a chiller operates in a dynamic environment and is designed to maintain a precise leaving chilled water temperature under varying entering chilled water conditions. The additional dynamic of rapidly varying condenser water temperature subjects the machine to fluctuating pressure on differentials across the evaporator and condenser. This varies the refrigerant flow and, therefore, the capacity. If this occurs faster than the machine can accommodate it, the condenser pressure or evaporator pressure will soon exceed their safety setpoints and the machine will shut down.

The necessary control can sometimes be attained via fan cycling if the tower is rated at the same capacity as the chiller's heat rejection. On multiple chiller jobs, a single tower is oversized relative to the chiller. On other jobs the tower/chiller might be oversized to the design load and the chiller and tower frequently cycle under light load. Under these conditions, fan cycling might result in very rapid temperature swings, which creates a dynamic situation to condenser, which potentially cause unstable

operation. Thus, in this case, either variable speed fans or modulating valve control should be used to regain control of the condenser water. Either type of control provides precise modulating control of the condenser water rather than on-off step control. The control can be initiated either by a condenser water temperature sensor or controller.

It is further recommended that the condenser water pump be cycled by the chiller. This is to eliminate potentially very cold water from going through the condenser while the chiller is shut down. At the same time it is probable that relatively warmer chilled water is in the evaporator (an inversion). Refrigerant tends to migrate if there is a difference in pressures within the components of the chiller. It will seek the lowest pressure area of the packaged chiller which, in this case, would be the condenser. Starting of a chiller where the refrigerant has migrated to the condenser is not desirable. The presence of highly subcooled liquid refrigerant in the condenser will cause low suction pressures and possibly liquid slugging of the compressor. If the condenser water pump is off until prior to the chiller starts, the water in the condenser is at the chiller room ambient, which is usually much closer to the evaporator water temperature.

Thus, even though there has been a trend toward fan cycling control of cooling towers, it is not a device that is suitable to every installation. We recommend that the designer carefully evaluate the system to determine if a more precise method of control is indicated. If there is any doubt, the more precise control is required.

GUIDE SPECIFICATIONS

SCOPE

Supply and commissioning of complete factory assembled water cooled centrifugal compressor chiller (s). The centrifugal chiller(s) shall contain centrifugal compressor(s), evaporator, condenser, interconnecting refrigerant piping, expansion device(s), inlet guide vanes, control panel, chilled liquid connections, and condenser water connections. The control panel shall be fully wired by the manufacturer connecting & interlocking controller, starter, electrical protection devices with electrical power and control connections. The starter may be supplied separate for field installation. Packaged chiller shall be factory assembled, charged and tested with a full operating refrigerant and oil charge. Upon successful completion the testing, the refrigerant shall be recovered from the chiller and leaving sufficient holding refrigerant charge above atmospheric pressure prior to the shipment. The refrigerant type shall be R134a or R513A and shall not have phasing out schedule.

Capacity of each chiller shall be not less than _____ refrigerant tons (kW output) cooling at _____ USGPM (liters/min.) of water from _____ °F[°C] to _____ °F[°C]. Power input requirements for the unit(s), incorporating all appurtenances necessary for unit operation, including but not limited to the control accessories and pumps, if required, shall not exceed _____ kW input at design conditions. The unit shall be able to unload to 20% of cooling (refrigeration) capacity when operating with leaving chilled water temperature and at condenser water entering temperatures as per AHRI relief. The unit shall be capable of continuous operation at this point, with stable compressor operation, without the use of hot gas bypass.

Heat transfer surfaces shall be selected to reflect the incorporation of a fouling factor of 0.00025 hr.sq.ft.°F/BTU [0.000044m².°C/W] for the water condenser and 0.0001 hr.sq.ft.°F/BTU [0.0000176m².°C/W] for evaporator. Water pressure drop at design conditions shall not exceed _____ feet of water through the condenser, and _____ feet of water through the evaporator.

QUALITY ASSURANCE

- ✿ Chiller performance shall be certified by AHRI as per AHRI 550/590 standard latest edition
- ✿ ASHRAE Standard 15 safety code for mechanical refrigeration
- ✿ ASME standard B31.5 for Refrigerant piping
- ✿ Vessels shall be fabricated and pressure tested in accordance with ASME Boiler and Pressure vessel code, Section VIII, Division 1 "Unfired Pressure Vessels"
- ✿ [Optional] ASME stamp on pressure vessels
- ✿ [Optional] PED certification required in Europe market place
- ✿ Unit shall be manufactured in ISO9001 registered manufacturing facility

✿ Factory run test: Chiller shall be pressure tested, evacuated and fully charged with refrigerant and oil. The chiller shall be run tested with water flowing through the vessels. The chiller needs to be tested either with the starter if the chiller is supplied with them

✿ Manufacturer shall have a strong service organization with trained service personal

DELIVERY, STORAGE AND HANDLING

Unit shall be delivered to job site fully assembled with all interconnecting refrigerant piping and internal wiring ready for field installation and with refrigerant holding charge and oil by manufacturer. When delivered, machine shall be stored indoors, away from construction dirt, dust, moisture or any other hazardous material that would harm the chillers. Inspect under shipping tarps, bags, or crates to be sure there is no water collected during transit. Protective shipping covers shall be kept with the unit until machine is ready for installation.

WARRANTY

Chiller manufacturer's warranty shall cover for 12 months from the date of start-up or 18 months from the date of shipment whichever is first. The start-up shall be carried out by an authorized service personnel and the warranty is limited to part replacement excluding labor and consumables such as refrigerant, oil & filter driers etc.

MAINTENANCE

Maintenance of the chillers will be responsibility of the owner and performed in accordance with the manufacturer's instructions.

OPERATING REQUIREMENT

The unit shall be capable of starting up with entering fluid temperature to the cooler at 93°F [34°C].

Minimum and maximum transportation and storage temperature of the chiller shall be -4°F [-20°C] and 122°F [50°C].

Unit shall be able to operate with 3-ph _____ Hz with unit rated voltage +/- 10%.

Control Voltage shall be 230V/1ph/50Hz or 230V/1ph/60Hz.

COMPRESSOR AND MOTOR

The packaged chiller shall be furnished with dual stage semi-hermetic dynamic centrifugal compressor(s) to suit the desired design requirement. The compressor shall be driven by a 2 pole motor (2900 RPM @ 50Hz; 3600 RPM @ 60Hz).

The impeller shall be statically and dynamically balanced. The compressor shall be vibration tested and shall not exceed 4mm/s.

GUIDE SPECIFICATIONS

The impeller shall be cast from special super high density aluminum alloy, light weight, high anti-corrosion ability. It shall have high efficient, back sweep main blades and low profile intermediate splitter blades, contoured aerodynamically to improve compressor full load and part load operating efficiency. Compressor shall complete with a backward inclined impeller and the compressor speed shall be increased to meet the required capacity and lift by using a single set of helical gears. The gears shall be especially engineered helical, crowned teeth, shall ensure that more than one tooth is in contact at all times for even distribution of load and for quieter operation. Gear tooth surfaces are case hardened and precision ground to AGMA class 11. Gears are integrally assembled in the compressor rotor support and are film lubricated. Each gear is individually mounted in its own journal and thrust bearings to isolate it from impeller and motor forces. The double layer compressor case design reduce the gear contacting noise. The drive gears shall operate in a controlled lubricant mist atmosphere that shall effectively cools and lubricate them.

The bearings shall be consisting of steel-backed babbitt-lined sleeve bearings, and special composite bearings ensure smooth, reliable operation over the life time of the chiller.

Non-contact labyrinth shaft seal shall be used for reducing the flow of gas from an area of high to low pressure. It shall involve a stationary labyrinth in close proximity to a rotating shaft.

Compressor shall have a reliable lubrication system which shall include integral oil pump, changeable oil filter, oil sump, oil heater, educator- jet pump and sight glass. A reliable compact, lightweight oil pump with lower pressure fluctuations and higher volumetric efficiency shall be used for maintaining required oil pressure and flow throughout the lubrication system to maintain the bearing lubrication in the compressor and motor. The lubrication system shall complete with reliable oil recovery system to bring back the oil accumulated in the cooler and other locations to the oil sump. Oil sump shall be provided with an integral electric oil heater with the compressor to maintain oil temperature of 95°F ~ 131°F [35°C ~ 55°C] during shutdown period in order to prevent oil dilution which may causes decrease in viscosity. The heater shall be energized by a sensor whenever the oil temperature in the sump is lower than the set value. Power to the oil heater/controls shall be on circuits that can provide continuous power supply when the compressor is disconnected and the chiller is switched off. In case of power interruption for longer period oil heater shall be energized for at least 24hrs to raise the oil temperature. Oil shall also be cooled during operation to the required temperature by sub cooled liquid refrigerant expansion. A plate type heat exchanger shall be used for this purpose.

An emergency oil reservoir shall be provided in order to maintain adequate lubrication flow under gravity, and prevent bearing damage that could occur during the

coast down period, in the event of power failure or pump malfunction.

The control system shall prevent compressor starting until proper oil pressure and proper oil temperature is achieved.

Capacity control shall be achieved by adjusting the degree of opening of the inlet guide vanes, thereby adjusting the volume flow rate. The guide vanes shall be connected with aircraft-quality cable and controlled by precise electronic actuator. It shall be able to maintain chilled fluid leaving temperature within a narrow dead band of the desired set point without surging or undue vibration. The vanes shall be able to regulate refrigerant flow through a wide stable operating range.

For unit equipped with Variable Frequency Drive (VFD), compressor motor speed shall be reduce to minimum possible speed before inlet guide vane to starts closing. The controller shall be capable to perform combined action of both VFD and inlet guide vane to deliver stable operation with optimized efficiency.

The compressor motor shall be closed-coupled hermetic, 2 pole, squirrel cage induction type. The motor shall have efficient refrigerant cooling system with spray nozzles, eliminating the need for additional equipment for motor cooling in the machine room. Motor winding shall have reliable corrosion resistant insulation which shall compatible with refrigerant and oil. The motor shall be protected by a temperature sensor imbedded in the stator windings.

EVAPORATOR

Evaporator vessel shall be cleanable shell and tube, flooded type. Shell shall be fabricated from rolled carbon steel sheet with fusion welded seams or carbon steel standard pipes. End plates shall be of carbon steel with precision drilling, reamed in order to accommodate tubes. Intermediate tube support shall be in place to provide required tube support between tube sheets. Tubes shall be of copper, seamless, high efficient, internally enhanced and externally finned, mechanically expanded into fixed steel tube sheets. Tube diameter shall be ¾ inch [19mm], 1 inch [25mm] and thickness shall be 0.025 inch [0.635mm]. The flooded evaporator shall have a built in distributor for feeding refrigerant evenly under the tube bundle to produce a uniform boiling action and baffle plates shall be provided to ensure vapor separation. Water box shall be removable for tube cleaning, shall have stub-out water connections with Victaulic grooves in compliance to ANSI/ AWWAC-606. They are to be available in single, two or three pass design as required on the drawings. Vent and drain plugs are to be provided in water box. The shell side of the evaporator shall have pressure relief valve with provision for refrigerant venting. Evaporators refrigerant side shall be designed, constructed in accordance with the ASME Code for Unfired Pressure Vessels. Evaporator shell side shall undergo pneumatic pressure test,

GUIDE SPECIFICATIONS

at 220psig [15.2Bar] shall be designed for working pressure up to 200psig [13.8Bar]. Tube side shall undergo hydrostatic pressure test at 195psig [13.4Bar], shall be designed for 150psig [10.3BAR] working pressure.

The flooded evaporator shall have an efficient and reliable oil recovery system. The oil recovery system shall insure the evaporator is operating at peak efficiency at all times and provide optimal energy efficiency during extended periods of part load. Units without such oil recovery systems will not be acceptable.

[OPTIONAL]

- A. Evaporator Flanged Water Connection – Flanged water connection shall be provided in lieu of Victaulic groove connection
- B. Double Thick Insulation – Evaporator shall be provided with 2 inch [50mm] thick closed cell insulation for extra resistance to condensation
- C. 1 inch tube diameter – Selection of larger diameter to minimize water pressure drop
- D. Marine Water Box – Marine type water box shall be provided for removal of the end covers of the vessel without dismantling the piping to facilitate tube cleaning
- E. PED Compliance – Evaporator with PED approval shall be provided for installation in European countries

CONDENSER

Condenser vessel shall be cleanable shell and tube. Shell shall be fabricated from rolled carbon steel sheet with fusion welded seams or carbon steel standard pipes. End plates shall be of carbon steel with precision drilling, reamed in order to accommodate tubes. Intermediate tube support shall be in place to provide required tube support between tube sheets. Tubes shall be of copper, seamless, high efficient, internally enhanced and externally finned, mechanically expanded into fixed steel tube sheets. Tube diameter shall be ¾ inch [19mm], 1 inch [25mm] and thickness shall be 0.025 inch [0.635mm]. Water box shall be removable for tube cleaning, shall have stubout water connections with Victaulic grooves in compliance to ANSI / AWWAC-606. They are to be available in single, two pass or three pass design as required on the drawings. Vent and drain plugs are to be provided in water box. The shell side of the condenser shall have pressure relief valve with provision for refrigerant venting. Condenser refrigerant side shall be designed, constructed in accordance with the ASME Code for Unfired Pressure Vessels. Condenser shell side shall undergo pneumatic pressure at 220psig [15.2Bar], shall be designed for working pressure up to 200psig [13.8Bar]. Tube side shall undergo hydrostatic pressure test at 195psig [13.4Bar], shall be designed for 150psig [10.3BAR] working pressure.

The condenser shall have baffle that prevent direct impingement of high velocity refrigerant gas flow from the compressor onto condenser tubes. It shall also eliminates the related vibration and wear of the tubes and distributes the refrigerant flow evenly over the length of the vessel for improved efficiency.

The condenser shall have sub-cooler located in the bottom of the condenser; increase the overall refrigerant effect of the chiller by sub-cooling the condensed liquid refrigerant which results in a combination of increasing capacity and improving the efficiency.

The condenser shall be sized for full pump down capacity.

[OPTIONAL]

- A. Evaporator Flanged Water Connection – Flanged water connection shall be provided in lieu of Victaulic groove connection
- B. Marine Water Box – Marine type water box shall be provided for removal of the end covers of the vessel without dismantling the piping to facilitate tube cleaning
- C. 1 inch tube diameter – Selection of larger diameter to minimize water pressure drop
- D. PED Compliance – Evaporator with PED approval shall be provided for installation in European countries
- E. Refrigeration Isolation Valves – Refrigerant isolation valve shall be provided to enable the entire unit refrigerant charge to be storage in the condenser enabling service and maintenance activities to be completed in less time and lower cost

REFRIGERANT CIRCUIT

The refrigerant circuit shall include (OPTION) liquid and discharge line isolation valves (which facilitate full pump down capacity in the condenser), oil filter, replaceable filter drier on oil line, sight glass on oil line, pressure relief valves on the cooler and condenser, liquid line angle valve for refrigerant charging. The packaged chiller shall be furnished with a simple reliable fixed orifice expansion device with no moving parts for refrigerant flow control.

OIL MANAGEMENT

The compressor shall have an independent lubrication system to provide lubrication to all parts requiring oil. The lubricating system shall have a positive displacement, compact light weight oil pump that shall be powered through the unit control transformer. The oil sump shall complete with oil heater to maintain sufficient oil temperature to minimize the oil dilution. It shall also include a plate type heat exchanger as oil cooler. An efficient oil recovery system shall be in place with interconnecting oil pipes together with required educator-jet-pump to recover oil from cooler and other locations in the chiller back to the oil sump.

GUIDE SPECIFICATIONS

ELECTRICAL AND CONTROL PANEL

The electrical switch gears, controller, control sensors and relays shall be housed in NEMA-1 panel. The panel casing shall be of galvanized steel with powder coating for corrosion resistance. The panel shall be divided into two separate compartments or shall have two separate panels to house power and control devices separately.

OPTIONAL COMPRESSOR MOTOR STARTER PANEL

The chiller manufacturer shall provide suitable starter for the compressor motor in order to minimize the starting current. The starter shall be factory built fully wired as stipulated under starter section elsewhere in this specification. The starter shall be able to provide adequate starting torque and the required acceleration for the compressor during starting.

NEMA-1 electrical panel compartment shall include:

- ✿ Main incoming power terminal suitable to receive single entry of three phase 3-wire power supply with specified voltage
- ✿ Circuit breakers for the compressor
- ✿ Solid state compressor motor over Current protection module
- ✿ Compressor motor overheat protection module
- ✿ Under/over voltage phase reversal and imbalance relay
- ✿ [Optional] Ground fault interrupter

The main motor starter shall be factory built to the chiller component and factory tested during the run test of the unit. The main motor starter is shipped loose for floor mounting and field wiring to the chiller package. It shall be free standing designed for top entry and bottom exit and with front access. Optional unit mounted motor starter panel shall be offered by the manufacturer for LV application, for the ease of field installation.

The compressor starter and circuit breakers shall be wired securely to the main incoming terminal block. External compressor over load protector, over heating protection modules, over/under voltage phase relay shall be interlocked with the compressor starter contactors to provide adequate protection to the compressor motor.

Low Voltage Starter (up to 575Vac)

A) Star-Delta Starter (Closed Transition) up to 460Vac

Star-Delta Starter with open transition shall not be accepted due to high changeover inrush current.

Contactors and resistors shall be properly sized to ensure smooth transition. Transition timer should be selected with adjustable 30 seconds range for proper changeover setting.

B) Solid State Starter (Softstarter)

The starter shall be furnished with SCRs (silicon

controlled rectifier), or also known as thyristors to limit the current flow during motor starting. The starter shall be furnished together with bypass contactor. When the motor starting cycle is completed (motor has reached operating speed), the bypass contactor shall be energized and disconnect SCRs from the power circuit during normal motor operation.

C) Variable Frequency Drive (VFD) up to 575Vac

The chiller shall be capable for Variable Frequency operation if VFD starter is supplied.

The VFD shall be constant torque type and able to deliver 110% torque for 60 seconds during normal operation. Displacement power factor of motor shall be improved to minimum level of 0.95 at all operating conditions with harmonic filter.

VFD shall meet EMC product standard EN61800-3, and harmonic requirement as per IEC/EN 61000-3-12.

VFD shall have inbuilt protection mode which automatically reduce the frequency and the modulation process adjusted when it detects critical status such as over current or over voltage etc.

VFD shall have inbuilt Electronic thermal motor protection against overload. The VFD shall be protected against short-circuits on motor terminals U, V, W. It shall also Protection against mains phase loss.

The VFD shall have built-in LCD keypad display with below information available:

- ✿ Motor current
- ✿ Voltage / frequency output
- ✿ Output kW
- ✿ Output frequency
- ✿ Fault log

Medium Voltage Starter (3kV up to 13.8kV)

A) Direct-On-Line Starter (DOL)

Contactors shall be properly sized to allow Lock Rotor Current (LRA) flows to motor during start-up.

B) Auto-Transformer Starter

Auto-transformer shall be supplied with properly sized contactors and transformer with factory wired to 65% tapping.

C) Solid State Starter (Softstarter)

The starter shall be furnished with SCRs (silicon controlled rectifier), or also known as thyristors to limit the current flow during motor starting. The starter shall be furnished together with bypass contactor. When the motor starting cycle is completed (motor has reached operating speed), the bypass contactor shall be energized and disconnect SCRs from the power circuit during normal motor operation.

GUIDE SPECIFICATIONS

D) Variable Frequency Drive (VFD)

The chiller shall be capable for Variable Frequency operation if VFD starter is supplied.

The VFD shall be constant torque type and able to deliver 110% torque for 60 seconds during normal operation. Displacement power factor of motor shall be improved to minimum level of 0.95 at all operating conditions with harmonic filter.

VFD shall meet EMC product standard EN61800-3, and harmonic requirement as per IEC/EN 61000-3-12.

VFD shall have inbuilt protection mode which automatically reduce the frequency and the modulation process adjusted when it detects critical status such as over current or over voltage etc.

VFD shall have inbuilt Electronic thermal motor protection against overload. The VFD shall be protected against short-circuits on motor terminals U, V, W. It shall also Protection against mains phase loss.

The VFD shall have built-in LCD keypad display with below information available:

- ✿ Motor current
- ✿ Voltage / frequency output
- ✿ Output kW
- ✿ Output frequency
- ✿ Fault log

CONTROL SYSTEM

The packaged chiller shall be equipped with stand alone proactive advance Microprocessor based DDC controller which adapts to abnormal operation conditions. It shall have built in Input/Output, PC interface, BMS communication port. The unit algorithm program and operating parameters shall be stored in non-volatile memory. Battery back-up is not acceptable. 230V Power supply to the controller shall be provided by a control transformer provided with the panel. The controller shall be equipped with a user friendly 10 inch color touch screen display and dedicated touch keys that provides easy access to the unit operating parameters, control set points and alarm history, based on security level of password. There shall be password protection for operator, service personnel and for the critical manufacturer settings in order to protect the chiller controller from unauthorized access.

The controller board shall be provided with a set of terminals that connected to various devices such as temperature sensors, pressure transducers, current transducers, solenoid valves, compressor starter, control relays.

The controller shall be able to carry out its own diagnose test on the controller and the connected devices and alarm messages shall be displayed automatically on faulty devices.

All messages shall be displayed in English language, and shall be displayed either in Imperial or SI units.

Leaving chilled water temperature control shall be accomplished by entering the water temperature set point with accuracy to 0.54°F and placing the controller automatic control mode. The controller shall monitor all control functions and move the compressor IGV or VFD (if supplied) or both to the calibrated position. The compressor loading cycle shall be programmable and shall be adjusted to the building load requirement. The loading IGV adjustable range shall be from 1% to 3% per increment to prevent excessive demand hike at start up.

The controller shall continuously monitor evaporator leaving water temperature, evaporator entering temperature, evaporator and condenser pressure; compressor amp draw; oil temp; oil pressure; motor temp and discharge refrigerant temperature. The controller shall complete with all hardware and software necessary to enable remote monitoring of all data through the Building Management Systems with open protocol Modbus RTU, and optional BMS links: Bacnet Over IP, Modbus TCP/IP, LonTalk, BACnet MSTP, or Johnson Control N2. The controller shall be complete with a RS485 communications port, the remote connection shall be established by a twisted pair of wire. The controller shall also accept a remote start and stop signal, 0 to 5VDC (optional), chilled water temperature reset signal (optional) and 0 to 5VDC compressor current limit reset signal (optional).

The electrical control panel shall be wired to permit fully automatic operation during - initial start-up, normal operation, and shutdown conditions. The control system shall contain the following control, displays and safety devices:

Manual/Auto Controls

- ✿ Auto/Local/Remote switch
- ✿ Control circuit stop and start switches
- ✿ Compressor enable switch
- ✿ Compressor over current
- ✿ Compressor anti-recycle
- ✿ Programmable with Seven day operation cycle
- ✿ Chilled liquid pump on/off control
- ✿ Condenser water pump on/off control
- ✿ Oil pump starter
- ✿ Start delay timer
- ✿ Anti-recycle timer
- ✿ Oil sump heater interlock relays

Refrigerant Flow Controls

- ✿ Compressor loading and unloading shall be carried out by inlet guide vanes actuator
- ✿ For unit with Variable Frequency Drive (VFD), compressor capacity control shall be carried out by VFD and Inlet Guide Vane actuators

GUIDE SPECIFICATIONS

Indicator Lights

- ✿ Control power
- ✿ Compressor power
- ✿ System common alarm
- ✿ VFD alarm (if supplied)

Soft Indicators On Touch Screen

- ✿ Compressor
- ✿ Open vanes
- ✿ Close vanes
- ✿ Oil pump
- ✿ Oil heater

The control system shall be provided with an anti-recycle device. The control shall limit compressor starting to a minimum of 15 minutes between starts.

System Operation Information

The chiller display shall provide following operating information.

Analog readings

- ✿ Leaving chilled water temperature
- ✿ Entering chilled water temperature
- ✿ Leaving condenser water temperature
- ✿ Entering Condenser water temperature
- ✿ Evaporator approach temp
- ✿ Evaporator entering and leaving temp difference
- ✿ Evaporator pressure
- ✿ Condenser pressure
- ✿ Saturated suction temp
- ✿ Saturated discharge temp
- ✿ Compressor amps drawn
- ✿ Operating supply Voltage
- ✿ Compressor elapsed run time
- ✿ Guide vane open degree in %
- ✿ Guide Vane adjusting range % (min-max)
- ✿ Water temperature set value
- ✿ Water temperature control zone (band)
- ✿ Bearing temperature
- ✿ Oil sump temperature
- ✿ Oil supply pressure
- ✿ Oil sump pressure
- ✿ Oil pressure difference
- ✿ [Optional] Water temperature re-set value
- ✿ Percentage of compressor capacity
- ✿ Motor temperature
- ✿ Comp lift
- ✿ Compressor speed
- ✿ Power up delay time

Status and set points

- ✿ Chilled water flow
- ✿ Condenser water flow
- ✿ Unit enable
- ✿ Oil pump over load
- ✿ BMS run
- ✿ IGV Open/closed

- ✿ Comp on/off
- ✿ Oil pump on/off
- ✿ Oil heater on/off
- ✿ Control power on
- ✿ Chilled water pump of/off
- ✿ Alarm on/off
- ✿ Condenser pump on/off
- ✿ External start/stop command status
- ✿ Cooling tower fan on/off

Safety Protections

- ✿ Short circuit protection
- ✿ Compressor motor over load protection (3 phase)
- ✿ Compressor motor overheat protection
- ✿ Under voltage phase failure relay
- ✿ High condenser pressure
- ✿ Low evaporator pressure
- ✿ Freeze protection (low chilled liquid leaving temperature)
- ✿ Chilled water flow loss
- ✿ Low differential pressure
- ✿ Compressor run error
- ✿ Power loss
- ✿ Sensor error
- ✿ Refrigerant loss
- ✿ Reverse rotation
- ✿ VFD fault (if VFD is supplied)
- ✿ Emergency stop

Controller shall be able to retain up to 10 alarm conditions complete with time of failure and all critical sensor readings. This aids service technicians in their trouble shooting task enabling downtime and nuisance trip-outs to be minimized.

EXECUTION

INSTALLATION

Chiller shall be installed strictly according to manufacturer's recommendations as stipulated in the installation manual, drawings and tender documents. Care should be taken to provide necessary service clearance as required in the manufacturer's drawing. Install the strainers at the inlet to the evaporator to prevent debris or other particles entering to the evaporator during piping work and initial flushing the system. Required coordination to be done with the electrical contractor and the control contractors to ensure electrical supply and required communications links are established.

START-UP/ COMMISSIONING

Chiller shall be commissioned by a service representative from manufacturer or by their local representative. The service personnel shall be trained and authorized by the manufacturer for start up of the supplied units. The start-up shall include briefing operators on chiller operations and maintenance as well.



Malaysia

Lot 5755-6,
Kidamai Industrial Park,
Bukit Angkat,
43000 Kajang,
Selangor, Malaysia

Tel: +603-8924 9000
Fax: +603-8739 5020

China

No. 1 Dunham-Bush Road,
Laishan District,
Yantai,
Shandong Province,
China 264003

Tel: +86-535-739 7888
Fax: +86-535-739 7999

United States of America

1800 SE 38th Avenue,
Homestead,
Florida 33035
United States of America

Tel: +1(786)-800 9999
Fax: +1(786)-527 3539

India

Unit No : 804-805 , 8th Floor,
Spaze Platinum Tower,
Sohna Road, Sector-47, Gurgaon
Haryana-122018, India

Tel: +91-124-414 4430

United Arab Emirates

Office # 2606,
Fortune Executive Towers,
Cluster T1, Jumeirah Lake Tower
Dubai, UAE

Tel: +971-4-443 9207
Fax: +971-4-443 9208

South Africa

No. 57 Sovereign Drive
Route 21 Corporate Park
Irene, Pretoria
South Africa

Tel: +27-12-345 4202
Fax: +27-12-345 4203

Singapore

2 Kallang Pudding Road
#07-07 Mactech Building
Singapore 349307

Tel: +65-6842 2012
Fax: +65-6842 2013

Indonesia

The Boulevard Office,
3F2 Jl. Fachrudin No.5,
Kp. Bali, Tanah Abang
Jakarta Pusat - 10250, Indonesia

Tel: +62-21-2123 1392

Thailand

48/39 Soi Praditmanutham 19
Praditmanutham Road,
Lat Pharo, Bangkok 10230
Thailand

Tel: +662-002 2125

Vietnam

10th Floor, Nam A Bank Tower,
201-203 Cach Mang Thang 8 Street,
Ward 4, District 3, Ho Chi Minh City,
Vietnam

Tel: +84-8-6290 3108
Fax: +84-8-6290 3109

DUNHAM-BUSH®

info@dunham-bush.com
www.dunham-bush.com



Products that perform...By people who care

Manufacturer reserves the right to change specifications without prior notice.

M-S-04103F-1024(US)